Contactors



- Three-pole versions up to 630A in IEC AC3 duty
- Four-pole versions up to 1600A in IEC AC1 duty
- Three-pole safety versions up to 38A (AC3).
- Versions for power factor correction up to 100kvar at 400VAC
- Four-pole versions with 2NO+2NC or 4NC main poles
- Versions for photovoltaic application
- Versions with AC, DC or AC/DC control
- Low-consumption versions with DC control circuit for control relays and 9-38A contactors in IEC AC3 duty
- Extensive choice of add-on blocks and accessories
- Certified by primary international authorities.

	Sec. - Page
Contactors	
Three-pole	2 - 6
Four-pole	2 - 10
Safety contactors	2 - 14
Four-pole with 2NO and 2NC poles or 4NC poles	2 - 16
For photovoltaic applications	2 - 17
For power factor correction	2 - 18
Control relays	2 - 19
Add-on blocks and accessories	
For BG series mini-contactors	2 - 20
For BF series contactors	2 - 22
For B series contactors	2 - 32
Spare parts	
AC coils for BF series contactors	2 - 34
AC/DC and DC coils for BF series contactors	2 - 35
AC/DC coils for B series contactors	2 - 36
Main contacts for BF and B series contactors	2 - 37
Arc chutes for BF and B series contactors	2 - 37
Dimensions	**2 - 38**
Wiring diagrams	**2 - 53**
Technical characteristics	**2 - 58**

تسلاکالا
021-9102 6126 | teslakala.com



Page 2-6

THREE-POLE CONTACTORS


- IEC Ith ratings in AC1 duty at ≤40°C: 16 to 1600A
- IEC Ie ratings in AC3 440V duty: 6 to 630A
- IEC Power ratings in AC3 400V duty: 2.2 to 335kW
- UL/CSA ratings: 3 to 500HP at 480V and 600V
- AC, DC, AC/DC and DC low-consumption coil.



Page 2-10

FOUR-POLE CONTACTORS

- IEC Ith ratings in AC1 duty at ≤40°C: 20 to 1600A
- IEC Power ratings in AC1 400V duty: 14 to 950kW
- UL/CSA general use: 20 to 1000A
- AC, DC, AC/DC and DC low-consumption coil.



Page 2-14

SAFETY CONTACTORS

- IEC Ie ratings in AC3 440V duty: 9 to 38A
- IEC Power ratings in AC3 400V duty: 4.2 to 18.5kW
- UL/CSA ratings: 5 to 30HP at 480V and 600V
- AC and DC coil.



Page 2-16

FOUR-POLE CONTACTORS WITH 2NO+2NC MAIN POWER POLES AND WITH 4 NC POLES


- IEC Ith ratings in AC1 duty at ≤40°C: 20 to 115A for type 2NO+2NC
- UL/CSA general use: 20 to 115A
- IEC Ith ratings in AC1 duty at ≤40°C: 32 to 45A
- UL/CSA general use: 20 to 55A for 4NC types
- AC, DC, AC/DC and DC low-consumption coil.



Page 2-17

CONTACTORS FOR PHOTOVOLTAIC APPLICATIONS

- Operational current up to 165A (DC1 600V at ≤55°C with 4 NO poles in series) for photovoltaic applications.
- AC, and AC/DC coil.

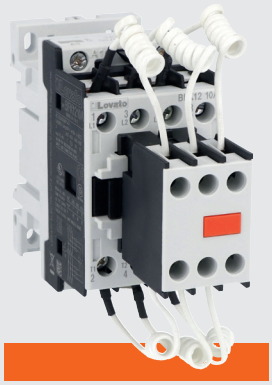

Page 2-18

CONTACTORS FOR POWER FACTOR CORRECTION

- With limiting resistors included
- IEC Power ratings at 400V: 7.5 to 100kvar
- UL/CSA ratings: 9 to 100kvar at 480V; 10 to 125kvar at 600V
- AC coil.



Page 2-19

CONTROL RELAYS

- AC, DC and DC low-consumption coil
- Screw or Faston termination
- 4, 8 or 11 auxiliary contact composition.

IE3 READY

LOVATO Electric contactors are suitable for new motors with high IE3 efficiency values

Lovato electric

THE IDEAL SOLUTION!



CONTACTORS WITH REDUCED WIDTH


A considerable dimensional advantage in system design.
45mm width up to 38A in AC3 (18.5kW).
55mm width up to 95A in AC3 (45kW).
75mm width up to 150A in AC3 (75kW).

CONTACTORS WITH IDENTICAL WIDTH TO CIRCUIT BREAKERS

Dimensions in line with molded case circuit-breakers of the same current allows compact starters and facilitates the connection of power terminals.
105mm width up to 230A in AC3 (110kW).
140mm width up to 400A in AC3 (200kW).

4-TERMINAL COIL

For BF09...BF400 contactors, connecting cables can be coupled to the coil both on the line and load ends of the contactor.

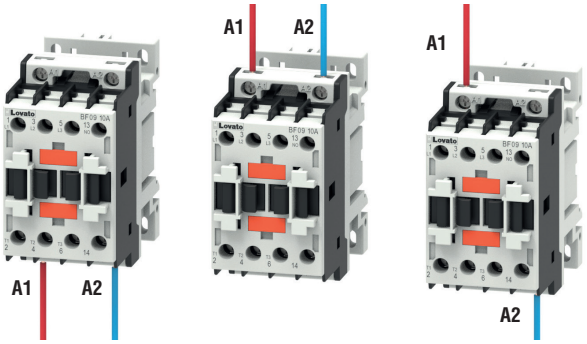

ELECTRONIC COIL

Contactors from 40 to 400A AC3 can be equipped with AC/DC electronic coil with wide operating range.
Example: single 100 to 250V AC/DC coil.
They also offer low consumption in service and stability even in the presence of abnormal voltages.

BUILT-IN SURGE SUPPRESSOR

BF series contactors up to 150A AC3 with voltages in DC or AC/DC already have a built-in surge suppressor.

LOW-CONSUMPTION COILS

The BF...L contactors feature a 2.4W low consumption coil.
This characteristic widely allows their direct control by PLC outputs.

COILS WITH WIDE OPERATING RANGE

BF...D contactors are equipped with a wide operating range coil and are particularly useful in applications subject to considerable voltage variations, such as in electric traction railway equipment.

SUITABLE FOR AC-3e MOTOR CONTROL

All contactors comply with utilization category AC-3e referring to high-efficiency motors.

SAFETY VERSIONS

The BF series contactors up to 38A in AC3 are available with factory mounted auxiliary contacts with “Mirror contact” and “Mechanical linked contact” functions for the construction of ISO13849-1 and EN62061 compliant machines.

RAILWAY APPLICATIONS



Thanks to the compliance with IEC 61373 (shock and vibration) and EN 45545 (fire behaviour), LOVATO Electric contactors are suitable for railway applications. Consult Technical support for detailed information; see contact details on inside front cover.

HOUSEHOLD AND COMMERCIAL APPLICATIONS



The plastic materials of the contactors comply with the EN 60335 standard typically applied in equipment for food industry and professional catering.
Consult Technical support for detailed information; see contact details on inside front cover.

PHOTOVOLTAIC APPLICATIONS




LOVATO Electric contactors are suitable for use in the various sections of the photovoltaic systems. In particular, there are specific contactors for use up to 1000VDC.

تسلاکالا
021-9102 6126 | teslakala.com


تسلاکالا
021-9102 6126 | teslakala.com

35MM DIN RAIL MOUNTING AND FIXING

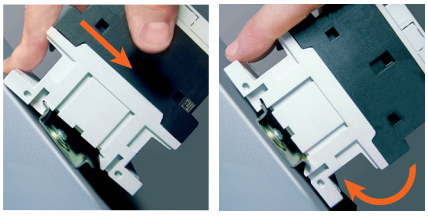


Contactor mounting on and removal from a 35mm DIN rail are tool-less operations and are done by simply applying pressure on the contactor.

RUBBER PAD INSERT TO PREVENT DIN RAIL SLIDING




A rubber insert prevents the contactors from sliding on the 35mm DIN rail even when out of tolerance or mounted vertically.

SNAP-ON INSTALLATION

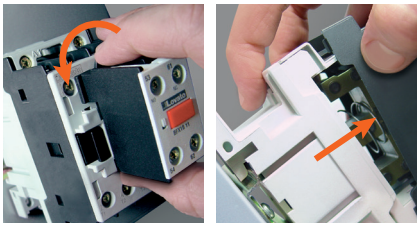

On the contactors, it's quick and easy to fit and remove auxiliary contacts and accessories, without using tools; the same applies to replacing the coil in the AC BF09...BF38 contactors.


EFFORTLESS THERMAL OVERLOAD RELAY LINK RF38, RF82 AND RF110 TYPES




During the connection of the thermal overload relay to the contactor, its auxiliary contact is simultaneously linked to the contactor coil terminal rigid connector.
The complete overload relay fixing is obtained with one single operation and without other connections.

RIGID CONNECTION KITS FOR FAST WIRING WITHOUT MISTAKES


The assembly and wiring of electromechanical starters is extremely fast and reliable.
Versatile electrical and mechanical connecting systems provide easy and foolproof assembly of compact starters and changeovers.



Changeover

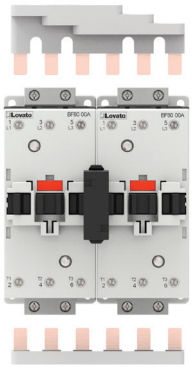

Reversing starter

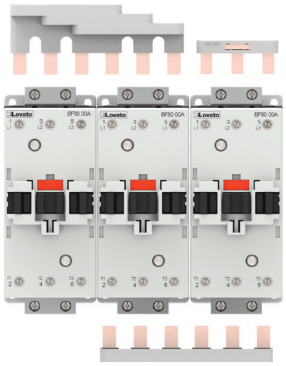


Star-delta starter

BREAKER-CONTACTOR CONNECTIONS

The rigid connections between breaker and contactor allow complete compact starters to be created easily, quickly and with less space used in the panel.
It is fitted on a single DIN rail.




IP20 CONNECTION SECURITY

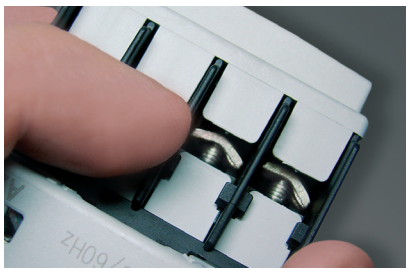

For BF09...BF38 contactors, the easy access and space for the terminals is combined with IP20 protection, preventing accidental contact with live parts.

IP20 ACCESSORY FOR CONTACTORS FROM 40A TO 150A AC3

IP20 protection can be obtained by adding a simple accessory.

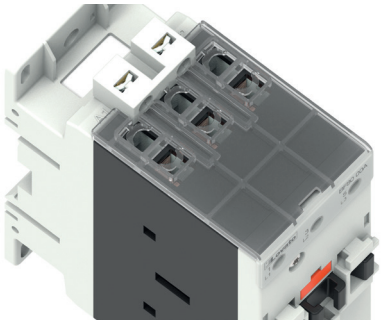


SIDE ADD-ON FOURTH POLE

For the 45A to 165A AC1 ratings, a side-mount fourth power pole can be snapped on the three-pole contactor. This solution permits the optimisation of inventory.



MECHANICAL INTERLOCK



Various versions of mechanical interlock are available.
One type can be integrated in the contactors from 9 to 38A AC3 without increasing the overall dimensions.
They may have built-in contacts to also make the electrical interlock. The mounting position can be on the side or on the front of the contactors.

TERMINAL ADAPTABILITY

Terminals are suitable for every type of cable: flexible, rigid, according to AWG standards and interlocked with any type of cable terminal.
For BF09...BF38 contactors, a single type of screwdriver tightens the screws for the power contacts, auxiliary contacts and coil.

DOUBLE LUG TERMINALS

40 to 150A AC3 contactors are equipped with double lug terminals for easy, functional access for power cables.
It is extremely simple to create star-delta starters, reversing switches, changeovers and arrange parallel supply for several contactors.



تسلاکالا
021-9102 6126 | teslakala.com

INNOVATION IS CONTINUING....



AC/DC COIL WITH ELECTRONIC CONTROL

- Wide operating range: for example one single coil to cover 100...250VAC/DC range
- Low consumption during in-rush and in service
- No chattering in the event of irregular voltage
- Built-in surge suppressor filter.


COMPACT DIMENSIONS

- Three-pole contactors: 105mm width for currents up to 230A AC3 - 350A AC1 and 140mm for current up to 400A AC3 - 600A AC1
- Four-pole contactors: 140mm width for currents up to 350A AC1 and 185mm width for current up to 600A AC1
- Width identical with molded-case circuit breakers (MCCB) of equal current.



CONTACT STATUS FRONT VIEW

A front mechanical indicator allows to easily identify the status of the contacts.






HIGH POWER TERMINALS FOR EASY AND SAFE WIRING

High power terminals to ensure a safe isolation distance from the panel in case of wiring with double terminals or bars for parallel or changeover.


SIDE-MOUNTING AUXILIARY CONTACTS

Useful in the event that the panel depth may be critical. Up to 8 auxiliary contacts can be mounted.

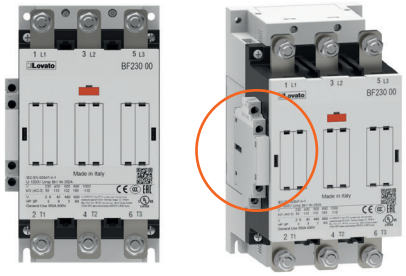

FRONT-MOUNT AUXILIARY CONTACTS

Up to 6 NO or NC auxiliary contacts (up to 8 contacts on 4 pole version), with screw terminals, can be mounted without side dimensions increasing.

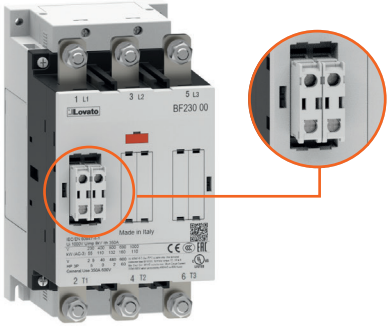

4-TERMINAL COIL


You can connect the connection cables to the coil either from the top or the bottom of the contactors.



The coil terminals are easy to reach with the screwdriver as they are interspersed with the power terminals.

HORIZONTAL AND VERTICAL INTERLOCK

Horizontal interlock with concealed mounting does not increase the dimensions.

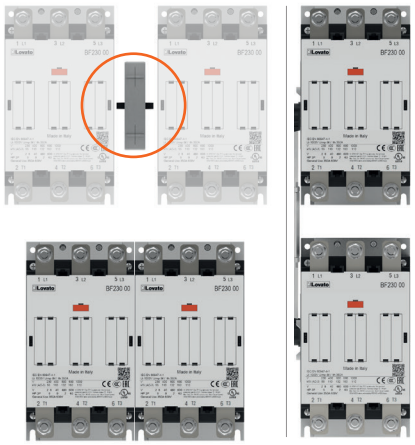

POWER TERMINAL PROTECTIONS PHASE BARRIERS.

They guarantee the separation and protection of the power terminals and adjacent phases separation.



TERMINAL ENLARGEMENT

Extend the terminal pitch to allow easy wiring of standard flange lugs for large cable cross-sections.




CAPTIVE NUT

Accessory that allows even easier wiring of the terminals using a single wrench.



EASY COIL AND POWER CONTACTS REPLACEMENT

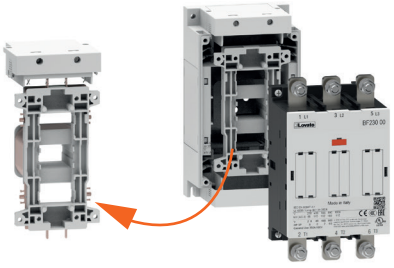

تسلاکالا
021-9102 6126 | teslakala.com

BG series mini-contactors



- AC and DC versions of same size
- Quick connect - snap on accessory mounting
- Distinct contact status indication
- Up to four auxiliary contacts can be mounted
- Mechanical interlock only 5mm depth
- Three-pole mini-contactors, 6 to 12A IEC AC3 duty / 3 to 7.5HP 480V - 3 to 10HP 600V UL/CSA
- Four-pole mini-contactors, 20A IEC AC1 duty
- Versions with 2NO+2NC main power poles
- Highly conductive auxiliary contacts with four contact points
- Coils with AC or DC supply
- Low-consumption DC versions
- Screw, Faston and rear PCB solder pin termination.

	3 poles			4 poles		
	Ie (AC3)	AC	DC	Ith (AC1)	AC	DC
BG06	6A	●	●	—	—	—
BG09	9A	●	●	20A	●	●
BGF09	9A	●	●	20A	●	●
BGP09	9A	●	●	20A	●	●
BG12	12A	●	●	—	—	—

BF series contactors







- Quick connect - snap on accessory mounting
- Distinct contact status indication
- Up to 12 auxiliary contacts can be mounted
- Mechanical interlock without overall dimensions increasing
- Three-pole contactors, 9 to 400A IEC AC3 duty / 5 to 150HP 480V - 7.5 to 200HP 600V UL/CSA
- Four-pole contactors, 25 to 600A in AC1 duty
- Three-pole safety contactors, 9 to 38A duty / 30HP 480V/600V UL/CSA
- Power factor correction contactors, 7.5 to 100kvar at 400V IEC / 9 to 110kvar at 480V UL/CSA
- Types with 2NO+2NC or 4NC main power poles
- Types for photovoltaic applications
- Highly conductive auxiliary contacts
- Coils with AC or DC supply
- Wide-range coils with electronic control for contactors from 40 to 400A AC3
- Low-consumption versions for control relays and 9-38A contactors in IEC AC3 duty.
- Screw terminals.

❶ Low-consumption version.
❷ Wide-range coil with electronic control.

		3 poles with coil type:			
	Ie (AC3)	AC	DC	DC❶	AC/DC❷
BF09	9A	●	●	●	—
BF12	12A	●	●	●	—
BF18	18A	●	●	●	—
BF25	25A	●	●	●	—
BF26	26A	●	●	●	—
BF32	32A	●	●	●	—
BF38	38A	●	●	●	—
BF40	40A	●	—	—	●
BF50	50A	●	—	—	●
BF65	65A	●	—	—	●
BF80	80A	●	—	—	●
BF94	95A	●	—	—	●
BF95	95A	●	—	—	●
BF115	115A	●	—	—	●
BF150	150A	●	—	—	●
BF160	160A	—	—	—	●
BF195	195A	—	—	—	●
BF230	230A	—	—	—	●
BF265	265A	—	—	—	●
BF330	330A	—	—	—	●
BF400	400A	—	—	—	●

		4 poles with coil type:			
	Ith (AC1)	AC	DC	DC❶	AC/DC❷
BF09	25A	●	●	●	—
BF12	28A	●	—	—	—
BF18	32A	●	●	●	—
BF26	45A	●	●	●	—
BF38	56A	●	●	●	—
BF40	70A	●	—	—	—
BF50	90A	●	—	—	—
BF65	100A	●	—	—	●
BF80	115A	●	—	—	●
BF95	140A	●	—	—	●
BF115	160A	●	—	—	●
BF150	165A	●	—	—	●
BF160	250A	—	—	—	●
BF195	275A	—	—	—	●
BF230	350A	—	—	—	●
BF265	450A	—	—	—	●
BF330	500A	—	—	—	●
BF400	600A	—	—	—	●

B series contactors



- Coil operates indifferently on AC or DC supply voltage
- Coil with low in-rush and holding
- Coil removable without disconnecting power wiring
- Red indicator when contactor is energised
- Safety feature prevents contactor to be energised without arc chute in place and locked
- Convertible auxiliary contact block (2NO + 1NC or 1NO + 2NC), maximum of 4 blocks per contactor for a total of 12 contacts
- Contactor terminals with bolt, washer and nut
- Simple horizontal or vertical interlock
- Three-pole contactors, 520A to 630A IEC AC3 duty
- Four-pole contactors, 700A to 1600A IEC AC1 duty
- 100 to 500HP 600V UL/CSA
- Coils with AC/DC supply
- Screw termination.

	3 poles			4 poles		
	Ie (AC3)	AC	AC/DC	Ith (AC1)	AC	AC/DC
B500	520A	—	●	700A	—	●
B630	630A	—	●	800A	—	●
B6301000	❶	—	●	1000A	—	●
B1250	❶	●	—	1250A	●	—
B1600	❶	●	—	1600A	●	—

❶ For AC1 / general use duty only.


BG06A…BG12A


BF09A…BF25A


BF26A…BF38A


BF40A…BF94A


BF95A…BF150A


BF160E…BF230E

new

BF265E…BF400E

Order code / AC coil	General use: IEC operating current Ith (AC1) ≤40°C	≤55°C	≤70°C	Three-phase motor control in AC-3/AC-3e duty: Ie (AC3) ≤440V at ≤55°C	Maximum IEC power at ≤55°C (AC-3/AC-3e) 230V	400V	415V	440V	500V	690V	1000V	UL/CSA details: Maximum UL/CSA horsepower ratings Single phase 120V	240V	Three phase 200V	240V	480V	600V
	[A]	[A]	[A]	[A]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	[HP]	[HP]	[HP]	[HP]	[HP]	[HP]
11BG0601A❶	16	14	12	6	1.5	2.2	2.4	2.5	3	3	—	1/3	1	1 1/2	2	3	3
11BG0610A❶																	
11BG0901A❶	20	18	15	9	2.2	4	4.3	4.5	5	5	—	1/2	1 1/2	2	3	5	5
11BG0910A❶																	
11BGF0901A❶	20	18	15	9	2.2	4	4.3	4.5	5	5	—	1/2	1 1/2	2	3	5	5
11BGF0910A❶																	
11BGP0901A❶	20	18	15	9	2.2	4	4.3	4.5	5	—	—	1/2	1 1/2	2	3	5❼	—
11BGP0910A❶																	
11BG1201A❶❷	20	18	15	12	3.2	5.7	6.2	5.5	5	5	—	1/2	1 1/2	3	3	7 1/2	10
11BG1210A❶❷																	
BF0901A❶❷	25	20	18	9	2.2	4.2	4.5	4.8	5.5	7.5	—	3/4	2	3	3	5	7 1/2
BF0910A❶❷																	
BF1201A❶❷	28	23	20	12	3.2	5.7	6.2	6.2	7.5	10	—	1	2	5	5	7 1/2	10
BF1210A❶❷																	
BF1801A❶❷	32	26	23	18	4	7.5	9	9	10	10	—	1	3	5	5	10	15
BF1810A❶❷																	
BF2501A❶	32	26	23	25	7	12.5	13.4	13.4	15	11	—	2	3	7 1/2	7 1/2	15	15
BF2510A❶																	
BF2600A❶❷	45	36	32	26	7.3	13	14	14	15.6	18.5	—	2	5	7 1/2	7 1/2	15	20
BF3200A❶❷	56	45	40	32	8.8	16	17	17	20	22	—	3	7 1/2	10	10	20	25
BF3800A❶	56(60❿)	45(48❿)	40(42❿)	38	11	18.5	18.5	18.5	20	22	—	3	7 1/2	10	15	30	30
BF4000A❶	70	60	50	40	11	18.5	22	22	22	30	22	3	7 1/2	10	15	30	40
BF5000A❶❷	90	75	65	50	15	22	30	30	30	37	30	5	10	15	20	40	40
BF6500A❶❷	100	80	70	65	18.5	30	37	37	37	45	30	—	—	20	25	50	60
BF8000A❶❷	115	95	80	80	22	45	45	45	55	55	37	—	—	25	30	60	75
BF9400A❶	115	95	80	95	30	55	55	55	55	55	37	—	—	25	30	60	75
BF9500A❶	140	115	100	95	30	55	55	55	75	90	45	—	—	30	30	60	75
BF11500A❶	160	130	115	115	37	55	55	55	75	110	55	—	—	40	40	75	100
BF15000A❶	165	135	118	150	45	75	75	75	90	110	55	—	—	50	50	100	125
BF16000E❽	250	210	180	160	45	75	90	90	110	132	75	—	—	50	60	125	150
BF19500E❽	275	230	200	195	55	90	110	110	132	160	110	—	—	60	75	150	150
BF23000E❽	350	290	250	230	55	110	110	132	132	160	132	—	—	75	75	150	200
BF26500E❽	450	375	325	265	75	132	132	160	160	200	160	—	—	75	100	200	250
new **BF33000E❽**	500	415	360	330	90	160	160	160	200	250	200	—	—	100	125	250	300
BF40000E❽	600	500	435	400	110	200	200	200	250	315	220	—	—	125	150	350	400
11B50000❷❸	700	550	500	520	156	290	306	328	367	416	312	—	—	150❶	200❶	400❶	450❶
11B63000❷❸	800	640	540	630	198	355	368	368	368	440	368	—	—	200❶	250❶	500❶	500❶
11B6301000000❷❺	1000	850	700	—	For AC1/Resistive duty only. see page 2-10.							—	—	—	—	—	—
11B125024❺❻	1250	1050	880	—	For AC1/Resistive duty only. see page 2-10.							No UL	—	—	—	—	—
11B160024❺❻	1600	1360	1120	—	For AC1/Resistive duty only. see page 2-10.							No UL	—	—	—	—	—

❶ Complete order code with coil voltage digit or with voltage digit followed by 60 (if 60Hz).
Standard voltages are as follows:
– AC 50/60Hz 024 / 048 / 110 / 230 / 400V
– AC 60Hz 024 60 / 048 60 / 120 60 / 220 60 / 230 60 / 460 60 / 575 60 (V).
Example: 11BG0610A230 for mini-contactor BG06, three-poles, with one NO contact and 230VAC 50/60Hz coil.
11BG0610A460 60 for mini-contactor BG06 with one NO contact and 460VAC 60Hz coil.

❷ The coil of the contactor can be powered indifferently in AC or DC. Complete the order code only with the digit of the coil voltage. Standard voltages are:
– AC/DC 24 / 48 / 60 / 110-125 (indicate 110) / 220-240 (indicate 220) / 380-415 (indicate 380) / 440-480V (indicate 440).
Example: 11B50000110 for contactor B500, three-poles, without auxiliary contacts and with 110-125VAC/DC coil.
Other voltages available on request.

❸ If predisposed for mechanical latch (G495), the order code becomes 11B...SL00 ❷.
If already fitted with mechanical latch (G495), the order code becomes 11B...L00 ❷ ❹.

❹ Indicate rated voltage of the mechanical latch, preceded by the letter C if in DC. Available voltages are:
– AC 50/60Hz 48 / 110-125 indicate 110 / 220-240 indicate 220 / 380-415V indicate 380
– DC 48 / 110-125 indicate 110 / 220-240V indicate 220.
Example: 11B500L00110220 for contactor B500 without auxiliary contacts, with 110-125VAC/DC coil and mechanical latch powered at 220-240VAC.

❺ G495 mechanical latch cannot be mounted.

❻ Complete the order code with the digit of the coil voltage. For 110-125VAC (50/60Hz) indicate 110 or 220-240VAC (50/60Hz) indicate 220.
Example: 11B125024110 for contactor B1250, three-poles, with 2NO+4NC auxiliary contacts and 110-125VAC 50/60Hz coil.

❼ Maximum voltage is limited at 300V for UL. For certified type up to 600V, consult Technical support for information; see contact details on inside front cover.

❽ For voltages 024 / 230 / 400VAC 50-60Hz: 10 pieces/package.
For all other voltages: 1 piece/package.


❾ Highly conductive auxiliary contact.

تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com


B500-B630


B6301000


B1250-B1600

		UL/CSA Short-circuit protection fuse, 600V⓬								
	UL/CSA General (purpose) use	High fault		Standard fault		Type of terminal	Incorpor. auxiliary contacts		Qty per pkg	Wt
		Short circuit current	Fuse	Short circuit current	Fuse					
	[A]	[kA]	[A]	[kA]	[A]		NO	NC	n°	[kg]
	16	100	30 (J)	5	30	Clamp-screw	—	1⓳	10	0.180
							1⓳	—	10	0.180
	20	100	30 (J)	5	30	Clamp-screw	—	1⓳	10	0.180
							1⓳	—	10	0.180
	20	100	30 (J)	5	30	Faston	—	1⓳	10	0.180
							1⓳	—	10	0.180
	20	100	30 (J)	5	30	Rear PCB solder pin	—	1⓳	10	0.197
							1⓳	—	10	0.197
	20	100	30 (J)	5	30	Clamp-screw	—	1⓳	10	0.180
							1⓳	—	10	0.180
	25	100	30 (J)	5	60	Clamp-screw	—	1⓳	1	0.367
							1⓳	—	⓭	0.367
	28	100	30 (J)	5	70	Clamp-screw	—	1⓳	1	0.367
							1⓳	—	⓭	0.367
	32	100	60 (J)	5	80	Clamp-screw	—	1⓳	1	0.367
							1⓳	—	⓭	0.367
⓯	32	100	60 (J)	5	100	Clamp-screw	—	1⓳	1	0.367
							1⓳	—	⓭	0.367
	45	100	100 (J)	5	100	Clamp-screw	—	—	1	0.437
	55	100	100 (J)	5	125	Clamp-screw	—	—	1	0.437
	55	100	100 (J)	5	150	Clamp-screw	—	—	1	0.437
	70	100	150 (J)	5	150 (RK5)	Double lug-clamp	—	—	1	1.020
	90	100	150 (J)	5	150 (RK5)	Double lug-clamp	—	—	1	1.020
	100	100	200 (J)	10	200 (RK5)	Double lug-clamp	—	—	1	1.020
	115	100	200 (J)	10	200 (RK5)	Double lug-clamp	—	—	1	1.020
	115	100	200 (J)	10	200 (RK5)	Double lug-clamp	—	—	1	1.020
	140	100	200 (J)	10	250 (RK5)	Double lug-clamp	—	—	1	2.020
	160	100	200 (J)	10	250 (RK5)	Double lug-clamp	—	—	1	2.020
	165	100	200 (J)	10	250 (RK5)	Double lug-clamp	—	—	1	2.020
	250	100	400 (J)	10	400 (RK5)	Screw-nut	—	—	1	3.000
	275	100	400 (J)	10	400 (RK5)	Screw-nut	—	—	1	3.000
	350	100	400 (J)	10	400 (RK5)	Screw-nut	—	—	1	3.000
	450	100	600 (J)	18	600 (RK5)	Screw-nut	—	—	1	4.600
	500	100	600 (J)	18	600 (RK5)	Screw-nut	—	—	1	4.600
	600	100	600 (J)	18	600 (RK5)	Screw-nut	—	—	1	4.600
	700	—	—	18⓫	1200 (L)	Screw-nut	—	—	1	18.000
	800	—	—	18⓫	1500 (L)	Screw-nut	—	—	1	18.620
	1000	—	—	18⓫	1500 (L)	Screw-nut	—	—	1	21.400
	No UL	—	—	—	—	Screw-nut	2	4	1	48.000
	No UL	—	—	—	—	Screw-nut	2	4	1	50.000

⓾ For use at this other current value, a 16mm² cable, headed with a fork terminal, must be used.
⓫ No UL/CSA ratings; data given for indication and reference purposes only.
⓬ Definite-purpose (DP) contactors are available. Consult Technical support for information; see contact details on inside front cover.
⓭ The contactor coil is controlled electronically; it can have either an AC or a DC supply and has a wide operating range.
Complete the order code only with the digit of the coil voltage.
Standard voltages are:
– AC/DC 024 = 24...60VAC/20...60VDC; 110 = 60...130VAC/DC; 230 = 100...250VAC/DC;
400 = 250...500VAC/DC.
⓮ The values in brackets indicate the class of the fuse to be used.
Where there is no value in brackets, any type of fuse can be used.
For protection with motor protection circuit breaker (type F combination motor controller) see chapter 1.

Certifications and compliance
Certifications obtained:

Type	cULus	UL	CSA	EAC	CCC	RINA
BG06A	●			●	●	
BG09A	●			●	●	
BG12A	●			●	●	
BGF09A	●			●	●	
BGP...A⓱	●			●	●	
BF09A	●		●	●	●	●
BF12A	●		●⓯	●	●	●
BF18A	●		●	●	●	●
BF25A	●		●⓯	●	●	●
BF26A	●		●	●	●	●
BF32A	●		●	●	●	●
BF38A	●		●⓯	●	●	●
BF40A	●			●	●	●
BF50A	●			●	●	●
BF65A	●⓯			●	●	●
BF80A	●			●	●	●
BF94A	●					
BF95A	●⓯					●
BF115A	●⓯					●
BF150A	●⓯					●
BF160	●			●	●	
BF195	●			●	●	
BF230	●			●	●	
BF265	●			⓰	⓰	
BF330	●			⓰	⓰	
BF400	●			⓰	⓰	
B500	●			●		
B630	●			●		
B6301000	●			●		
B1250				●		
B1600				●		

● Certified products.

UL - UL Listed, for USA and Canada (cULus - File E93602) for BG... and BF09...BF400 types indicated, as Motor Controllers – Contactors, except for BGP09... types which are UL Recognized, for USA and Canada (c UL us File E93602 – Component - Products having this type of marking are intended for use as components of complete workshop-assembled equipment).
BGP is UL rated up to 300V; for type with rating up to 600V, consult Technical support for information – see contact details on inside front cover.
UL Listed for USA and Canada (cULus - File E172189) for B500... B6301000 and B500SL... B630SL types as Industrial Control Switches.

CSA - BF09...BF95 contactors are also CSA certified, for Canada only (File 54332).
In addition, BF12..., BF25... and BF38... types are CSA certified as "Elevator Equipment" (File 54332, class 2411); BF65..., BF95..., BF115... and BF150... are UL certified as "Elevator Equipment (File E 93602). See technical characteristics on page 2-72.

⓯ This contactor has also achieved elevator equipment certification.
⓰ Pending.

Compliant with standards: IEC/EN/BS 60947-1, IEC/EN/BS 60947-4-1, UL508, CSA C22.2 n° 14; UL 60947-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.
Plastic materials are compliant with standards IEC/EN/BS 60335; for all BF09...BF38 versions only, add suffix V260 to the standard product order code.
Example: BF0910A230V260 for BF09, three-poles, with one NO contact and 230V 50/60Hz coil with compliant plastic materials.
Note: The contactors that have incorporated NC auxiliary contacts comply with annex F of the IEC/EN/BS 60947-4-1 standard "auxiliary contact linked with power contact" also known as mirror contacts.


BG06D…BG12D
BG09L


BF09D…BF25D
BF09L…BF25L


BF26D-BF38D
BF26L-BF38L


BF40E…BF94E


BF95E…BF150E


BF160E…BF230E

new

BF265E…BF400E

Order code DC coil	DC coil Low consumption	General use IEC operating current Ith (AC1) ≤40°C [A]	≤55°C [A]	≤70°C [A]	Three-phase motor control in AC-3/AC-3e duty Ie (AC3) ≤440V at ≤55°C [A]	Maximum IEC power at ≤55°C (AC-3/AC-3e) 230V [kW]	400V [kW]	415V [kW]	440V [kW]	500V [kW]	690V [kW]	1000V [kW]	UL/CSA details Maximum UL/CSA horsepower ratings Single phase 120V [HP]	240V [HP]	Three phase 200V [HP]	240V [HP]	480V [HP]	600V [HP]
11BG0601D❶	—	16	14	12	6	1.5	2.2	2.4	2.5	3	3	—	1/3	1	1 1/2	2	3	3
11BG0610D❶	—																	
11BG0901D❶	**11BG0901L❷**	20	18	15	9	2.2	4	4.3	4.5	5	5	—	1/2	1 1/2	2	3	5	5
11BG0910D❶	**11BG0910L❷**																	
11BGF0901D❶	**11BGF0901L❷**	20	18	15	9	2.2	4	4.3	4.5	5	5	—	1/2	1 1/2	2	3	5	5
11BGF0910D❶	**11BGF0910L❷**																	
11BGP0901D❶	—	20	18	15	9	2.2	4	4.3	4.5	5	—	—	1/2	1 1/2	2	3	5❽	—
11BGP0910D❶	—																	
11BG1201D❶⓬	—	20	18	15	12	3.2	5.7	6.2	5.5	5	5	—	1/2	1 1/2	3	3	7 1/2	10
11BG1210D❶⓬	—																	
BF0901D❶⓬	**BF0901L❷⓬**	25	20	18	9	2.2	4.2	4.5	4.8	5.5	7.5	—	3/4	2	3	3	5	7 1/2
BF0910D❶⓬	**BF0910L❷⓬**																	
BF1201D❶⓬	**BF1201L❷⓬**	28	23	20	12	3.2	5.7	6.2	6.2	7.5	10	—	1	2	5	5	7 1/2	10
BF1210D❶⓬	**BF1210L❷⓬**																	
BF1801D❶⓬	**BF1801L❷⓬**	32	26	23	18	4	7.5	9	9	10	10	—	1	3	5	5	10	15
BF1810D❶⓬	**BF1810L❷⓬**																	
BF2501D❶	**BF2501L❷**	32	26	23	25	7	12.5	13.4	13.4	15	11	—	2	3	7 1/2	7 1/2	15	15
BF2510D❶	**BF2510L❷**																	
BF2600D❶⓬	**BF2600L❷⓬**	45	36	32	26	7.3	13	14	14	15.6	18.5	—	2	5	7 1/2	7 1/2	15	20
BF3200D❶⓬	**BF3200L❷⓬**	56	45	40	32	8.8	18	17	17	20	22	—	3	7 1/2	10	10	20	25
BF3800D❶	**BF3800L❷**	56 (60⓫)	45 (48⓫)	40 (42⓫)	38	11	18.5	18.5	18.5	20	22	—	3	7 1/2	10	15	30	30
BF4000E❸	—	70	60	50	40	11	18.5	22	22	22	30	22	3	7 1/2	10	15	30	30
BF5000E❸⓬	—	90	75	65	50	15	22	30	30	30	37	30	5	10	15	20	40	40
BF6500E❸⓬	—	100	80	70	65	18.5	30	37	37	37	45	30	—	—	20	25	50	60
BF8000E❸⓬	—	115	95	80	80	22	45	45	45	55	55	37	—	—	25	30	60	75
BF9400E❸	—	115	95	80	95	30	55	55	55	55	55	37	—	—	25	30	60	75
BF9500E❸	—	140	115	100	95	30	55	55	55	75	90	45	—	—	30	30	60	75
BF11500E❸	—	160	130	115	115	37	55	55	55	75	110	55	—	—	40	40	75	100
BF15000E❸	—	165	135	118	150	45	75	75	75	90	110	55	—	—	50	50	100	125
BF16000E❸	—	250	210	180	160	45	75	90	90	110	132	75	—	—	50	60	125	150
BF19500E❸	—	275	230	200	195	55	90	110	110	132	160	110	—	—	60	75	150	150
BF23000E❸	—	350	290	250	230	55	110	110	132	132	160	132	—	—	75	75	150	200
BF26500E❸	—	450	375	325	265	75	132	132	160	160	200	160	—	—	75	100	200	250
new **BF33000E❸**	—	500	415	360	330	90	160	160	160	200	250	200	—	—	100	125	250	300
BF40000E❸	—	600	500	435	420	110	200	200	200	250	315	220	—	—	125	150	350	400
11B50000❹❺	—	700	550	500	520	156	290	306	328	367	416	312	—	—	150⓭	200⓭	400⓭	450⓭
11B63000❹❺	—	800	640	540	630	198	335	368	368	368	440	368	—	—	200⓭	250⓭	500⓭	500⓭
11B630100000❹❼	—	1000	850	700	—	For AC1/Resistive duty only, see page 2-10.							—	—	—	—	—	—

❶ Complete order code with coil voltage digit.
For BG09...D 24VDC version complete with built-in surge suppressor, add suffix **V120** to the standard order code.
The BF09-BF38D types already have a standard supplied built-in TVS (Transient Voltage Suppressor).
Standard voltages are as follows:
– DC 012 / 024 / 048 / 060 / 110 / 125 / 220V.
Example: 11BG0610D012 for mini-contactor BG06, three-poles, with one NO contact and 12VDC coil.
11BG0910D024 V120 for mini-contactor BG09, three-poles, with one NO contact and 24VDC coil, complete with built-in TVS (diode) suppressor.

❷ Low-consumption version.
No add-on auxiliary contacts or mechanical interlock can be mounted on BG... type contactors.
Complete order code with coil voltage digit.
The BF09-BF38L types already have a standard supplied built-in TVS (Transient Voltage Suppressor).
Standard voltages are as follows:
– DC 024 / 048V.
Example: 11BG0901L024 for mini-contactor BG09, three-poles, with one NC contact and 24VDC low-consumption coil.

❸ The contactor coil is controlled electronically; it can have either an AC or a DC supply and has a wide operating range.
The order code must be completed with the coil voltage digit.
The standard voltages are as follows:
– AC/DC 024 = 20...48V; 110 = 60...110V; 230 = 100...250V.

❹ The coil of the contactor can be powered indifferently in AC or DC. Complete the order code only with the digit of the coil voltage.
Standard voltages are:
– AC/DC 24 / 48 / 60 / 110-125 (indicate 110) / 220-240 (indicate 220) / 380-415 (indicate 380) / 440-480V (indicate 440).
Example: 11B50000110 for contactor B500, three-poles, without auxiliary contacts and with 110-125VAC/DC coil.
Other voltages available on request.

❺ If predisposed for mechanical latch (G495), the order code becomes 11B...SL00 ❹.
If already fitted with mechanical latch (G495), the order code becomes 11B...L00 ❹ ❻.

❻ Indicate rated voltage of the mechanical latch, preceded by the letter C if in DC.
Standard voltages are:
– AC 50/60Hz 48 / 110-125 indicate 110 / 220-240 indicate 220 / 380-415V indicate 380
– DC 48 / 110-125 indicate 110 / 220-240V indicate 220.
Example: 11B500L00110C48 for contactor B500, three-poles, without auxiliary contacts, with 110-125VAC/DC coil and mechanical latch powered at 48VDC.

تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com


B500-B630


B6301000

	UL/CSA Short-circuit protection fuse, 600V⓮								
	UL/CSA General (purpose) use	High fault		Standard fault		Type of terminal	Incorporated auxiliary contacts		Qty per pkg	Wt
		Short circuit current	Fuse	Short circuit current	Fuse					
	[A]	[kA]	[A]	[kA]	[A]		NO	NC	n°	[kg]
	16	100	30 (J)	5	30	Clamp-screw	—	1⓽	10	0.214
							1⓽	—	10	0.214
	20	100	30 (J)	5	30	Clamp-screw	—	1⓽	10	0.214
							1⓽	—	10	0.214
	20	100	30 (J)	5	30	Faston	—	1⓽	10	0.210
							1⓽	—	10	0.210
	20	100	30 (J)	5	30	Rear PCB solder pin	—	1⓽	10	0.240
							1⓽	—	10	0.240
	20	100	30 (J)	5	30	Clamp-screw	—	1⓽	10	0.214
							1⓽	—	10	0.214
	25	100	30 (J)	5	60	Clamp-screw	—	1⓽	1	0.494
							1	—	1	0.494
	28	100	30 (J)	5	70	Clamp-screw	—	1⓽	1	0.494
							1	—	1	0.494
	32	100	60 (J)	5	80	Clamp-screw	—	1⓽	1	0.494
							1	—	1	0.494
	32	100	60 (J)	5	100	Clamp-screw	—	1⓽	1	0.494
							1	—	1	0.494
	45	100	100 (J)	5	100	Clamp-screw	—	—	1	0.559
	55	100	100 (J)	5	125	Clamp-screw	—	—	1	0.559
	55	100	100 (J)	5	150	Clamp-screw	—	—	1	0.559
	70	100	150 (J)	5	150 (RK5)	Double lug-clamp	—	—	1	1.050
	90	100	150 (J)	5	150 (RK5)	Double lug-clamp	—	—	1	1.050
	100	100	200 (J)	10	200 (RK5)	Double lug-clamp	—	—	1	1.050
	115	100	200 (J)	10	200 (RK5)	Double lug-clamp	—	—	1	1.050
	115	100	200 (J)	10	200 (RK5)	Double lug-clamp	—	—	1	1.050
	140	100	200 (J)	10	250 (RK5)	Double lug-clamp	—	—	1	2.060
	160	100	200 (J)	10	250 (RK5)	Double lug-clamp	—	—	1	2.060
	165	100	200 (J)	10	250 (RK5)	Double lug-clamp	—	—	1	2.060
	250	100	400 (J)	10	400 (RK5)	Screw-nut	—	—	1	3.000
	275	100	400 (J)	10	400 (RK5)	Screw-nut	—	—	1	3.000
	350	100	400 (J)	10	400 (RK5)	Screw-nut	—	—	1	3.000
	450	100	600 (J)	18	600 (RK5)	Screw-nut	—	—	1	4.600
	500	100	600 (J)	18	600 (RK5)	Screw-nut	—	—	1	4.600
	600	100	600 (J)	18	600 (RK5)	Screw-nut	—	—	1	4.600
	700⓫	—	—	18⓫	1200 (L)	Screw-nut	—	—	1	18.060
	800⓫	—	—	18⓫	1500 (L)	Screw-nut	—	—	1	18.620
	1000	—	—	18⓫	1500 (L)	Screw-nut	—	—	1	21.400

⓱ G495 mechanical latch cannot be mounted.
⓲ Maximum voltage is limited at 300V for UL. For certified type up to 600V, consult Technical support for information; see contact details on inside front cover.
⓳ Highly conductive auxiliary contact.
⓴ For use at this other current value, a 16mm² cable, headed with a fork terminal, must be used.
⓫ No UL/CSA ratings; data given for indication and reference purposes only.
⓬ Definite-purpose (DP) contactors are available. Consult Technical support for information; see contact details on inside front cover.
⓭ The contactor coil is controlled electronically; it can have either an AC or a DC supply and has a wide operating range.
Complete the order code only with the digit of the coil voltage.
Standard voltages are:
– AC/DC 024 = 24...60VAC/20...60VDC; 110 = 60...130VAC/DC; 230 = 100...250VAC/DC; 400 = 250...500VAC/DC.
⓮ The values in brackets indicate the class of the fuse to be used.
Where there is no value in brackets, any type of fuse can be used.
For protection with motor protection circuit breaker (type F combination motor controller) see chapter 1.

Certifications and compliance
Certifications obtained:

Type	c UL us	UL	CSA	EAC	CCC	RINA
BG06D	●			●	●	
BG09D	●			●	●	
BG12D	●			●	●	
BGF09D	●			●	●	
BGP09D⓲	c UL us	●	●			
BF09D - BF09L	●		●	●	●	●
BF12D - BF12L	●		●⓯	●	●	●
BF18D - BF18L	●		●	●	●	●
BF25D - BF25L	●		●⓯	●	●	●
BF26D - BF26L	●		●	●	●	●
BF32D - BF32L	●		●	●	●	●
BF38D - BF38L	●		●⓯	●	●	●
BF40E	●			●	●	
BF50E	●			●	●	
BF65E	●⓯			●	●	
BF80E	●			●	●	
BF94E	●					
BF95E	●⓯					
BF115E	●⓯					
BF150E	●⓯					
BF160E	●			●	●	
BF195E	●			●	●	
BF230E	●			●	●	
BF265E	●			⓰	⓰	
BF330E	●			⓰	⓰	
BF400E	●			⓰	⓰	
B500	●			●		
B630	●			●	●	
B6301000	●			●		

● Certified products.

UL - UL Listed, for USA and Canada (cULus File E93602) for BG... and BF09...BF400 types indicated, as Motor Controllers – Contactors, except for BGP09... types which are UL Recognized, for USA and Canada (c UL us File E93602 – Component). Products having this type of marking are intended for use as components of complete workshop-assembled equipment.
BGP is UL rated up to 300V; for type with rating up to 600V, consult Technical support for information – see contact details on inside front cover.
UL Listed for USA and Canada (cULus - File E172189) for B500... B630 1000 and B500 SL... B630 SL types as Industrial Control Switches.

CSA - BF09...BF38 contactors are also CSA certified, for Canada only (File 54332).
In addition, BF12..., BF25... and BF38... types are CSA certified as "Elevator Equipment" (File 54332, class 2411); BF65..., BF95..., BF115... and BF150... are UL certified as "Elevator Equipment (File E 93602). See technical characteristics on page 2-72.

⓯ This contactor has also achieved elevator equipment certification.
⓰ Pending.

Compliant with standards: IEC/EN/BS 60947-1, IEC/EN/BS 60947-4-1, UL508, CSA C22.2 n° 14; UL 60947-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.
Plastic materials are compliant with standards IEC/EN/BS 60335; for all BF09...BF38 versions only, add suffix V260 to the standard product order code.
Example: BF09 10 D024 V260 for BF09, three-poles, with one NO contact and 24VDC coil with compliant plastic materials.
Note: The contactors that have incorporated NC auxiliary contacts comply with annex F of the IEC/EN/BS 60947-4-1 standard "auxiliary contact linked with power contact" also known as mirror contacts.


BG09T4A


BF09AT4A…BF18T4A


BF26T4A…BF38T4A


BF40T4A…BF80T4A


BF95T4A…BF150T4A


BF160T4E…BF230T4E

new

BF265T4…BF400T4

IEC/EN/BS 60947-4-1 characteristics

Order code AC coil	IEC operating current Ith (AC1) ≤40°C [A]	≤55°C [A]	≤70°C [A]	Ie (AC3) ≤440V at ≤55°C [A]	Maximum IEC power at ≤40°C (AC1) 230V [kW]	400V [kW]	415V [kW]	440V [kW]	500V [kW]	690V [kW]	1000V [kW]	UL/CSA details UL/CSA General (purpose) use [A]
11BG09T4A❶⑩	20	18	15	9	8	14	14	15	16	22	—	20
11BGF09T4A❶	20	18	15	9	8	14	14	15	16	22	—	20
11BGP09T4A❶	20	18	15	9	8	14	14	15	16	—	—	20❼
BF09T4A❶⑩	25	20	18	9	9.5	16	17	18	21	27	—	25
BF12T4A❶⑩	28	23	20	12	10	18	19	20	23	32	—	28
BF18T4A❶⑩	32	26	23	18	12	21	22	23	26	36	—	32
BF26T4A❶❽⑩	45	36	32	26	17	30	31	33	37	51	—	45
BF38T4A❶❽	56 (60❾)	45 (48❾)	40 (42❾)	38	21	36	38	40	45	62	—	55
BF40T4A❶	70	60	50	40	26	46	48	51	58	79	115	70
BF50T4A❶⑩	90	75	65	50	34	59	61	65	74	102	148	90
BF65T4A❶⑩	100	80	70	65	38	65	68	72	82	114	165	100
BF80T4A❶⑩	115	95	80	80	43	76	79	83	95	120	185	115
BF95T4A❶	140	115	100	95	53	92	96	101	115	159	230	140
BF115T4A❶	160	130	115	115	61	105	109	116	132	182	263	160
BF150T4A❶	165	135	118	150	62	110	113	119	136	187	271	165
BF160T4E❼	250	210	180	160	95	165	171	181	206	284	411	250
BF195T4E❼	275	230	200	195	104	181	188	199	226	312	452	275
BF230T4E❼	350	290	250	230	132	230	239	253	288	397	576	350
new **BF265T4E❼**	450	375	325	265	170	296	307	326	370	511	740	450
new **BF330T4E❼**	500	415	360	330	189	329	341	362	411	568	823	500
BF400T4E❼	600	500	435	400	227	395	410	434	494	681	987	600
11B500400❷❸	700	550	500	520	252	438	478	500	575	755	1100	700
11B630400❷❸	800	640	540	630	288	500	545	580	655	860	1250	800
11B6301000400❷❺	1000	850	700	—	350	600	630	725	750	1000	1600	1000
11B1250424❺❻	1250	1050	880	—	480	830	900	905	1100	1450	2000	No UL/CSA
11B1600424❺❻	1600	1360	1120	—	550	950	1000	1160	1200	1650	2500	No UL/CSA

❶ Complete order code with coil voltage digit or voltage digit followed by 60 if 60Hz.
Standard voltages are as follows:
– AC 50/60Hz 024 / 048 / 110 / 230 / 400V
– AC 60Hz 024 60 / 048 60 / 120 60 / 220 60 / 230 60 / 460 60 / 575 60 (V).
Example: 11BG09T4A230 for mini-contactor BG09, four-poles, with 230VAC 50/60Hz coil.
11BG09T4A460 60 for mini-contactor BG09, four-poles, with 460VAC 60Hz coil.

❷ The coil of the contactor can be powered indifferently in AC or DC. Complete the order code only with the digit of the coil voltage. Standard voltages are:
– AC/DC 24 / 48 / 60 / 110-125 (indicate 110) / 220-240 (indicate 220) / 380-415 (indicate 380) / 440-480V (indicate 440).
Example: 11B500400110 for contactor B500, four-poles, without auxiliary contacts and with 110-125VAC/DC coil.
Other voltages available on request.

❸ If predisposed for mechanical latch (G495), the order code becomes 11B...4SL00 ❷.
If already fitted with mechanical latch (G495), the order code becomes 11B...4L00 ❷ ❹.

❹ Indicate rated voltage of the mechanical latch, preceded by the letter C if in DC.
Standard voltages are:
– AC 50/60Hz 48 / 110-125 indicate 110 / 220-240 indicate 220 / 380-415V indicate 380
– DC 48 / 110-125 indicate 110 / 220-240V indicate 220.
Example: 11B5004L00110C220 for contactor B500, four-poles, without auxiliary contacts, with 110-125VAC/DC coil and mechanical latch powered at 220-240VDC.

❺ G495 mechanical latch cannot be mounted.

❻ Complete the order code with the digit of the coil voltage. For 110-125VAC 50/60Hz indicate 110 or 220-240VAC 50/60Hz indicate 220.
Example: 11B1250424110 for contactor B1250, four-poles, with 2NO+4NC auxiliary contacts and 110-125VAC/DC 50/60Hz coil.

❼ Maximum voltage is limited at 300V for UL. For certified type up to 600V. Consult Technical support for information; see contact details on inside front cover.

❽ Whenever the BF26T4 or BF38T4 types need to be mechanically interlocked with either the BFX5000 or BFX5001, the add-on fourth pole of one of the contactors needs to be removed from the right side and fitted on the left side.

❾ For use at this other current value, a 16mm² cable, headed with a fork terminal, must be used.


❿ Definite-purpose (DP) contactors are available. Consult Technical support for information; see contact details on inside front cover.

تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com


B5004-B6304


B63010004

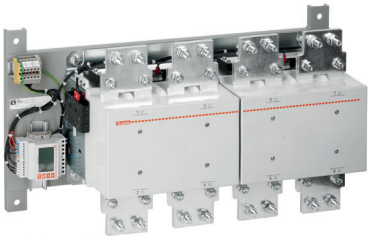
B1250-B16004

	UL/CSA Short-circuit protection fuse, 600V⓭								
	High fault		Standard fault		Type of terminal	Incorporated auxiliary contacts		Qty per pkg	Weight
	Short circuit current	Fuse	Short circuit current	Fuse					
	[kA]	[A]	[kA]	[A]		NO	NC	n°	[kg]
	100	30 (J)	5	30	Clamp-screw	—	—	10	0.180
	100	30 (J)	5	30	Faston	—	—	10	0.180
	100	30 (J)	5	30	Rear PCB solder pin	—	—	10	0.197
	100	30 (J)	5	60	Clamp-screw	—	—	1	0.367
	100	30 (J)	5	70	Clamp-screw	—	—	1	0.367
	100	60 (J)	5	80	Clamp-screw	—	—	1	0.367
	100	100 (J)	5	100	Clamp-screw	—	—	1	0.508
	100	100 (J)	5	150	Clamp-screw	—	—	1	0.508
	100	150 (J)	5	150 (RK5)	Double lug-clamp	—	—	1	1.240
	100	150 (J)	5	150 (RK5)	Double lug-clamp	—	—	1	1.240
	100	200 (J)	10	200 (RK5)	Double lug-clamp	—	—	1	1.240
	100	200 (J)	10	200 (RK5)	Double lug-clamp	—	—	1	1.240
	100	200 (J)	10	250 (RK5)	Double lug-clamp	—	—	1	2.420
	100	200 (J)	10	250 (RK5)	Double lug-clamp	—	—	1	2.420
	100	200 (J)	10	250 (RK5)	Double lug-clamp	—	—	1	2.420
	100	400 (J)	10	400 (RK5)	Screw-nut	—	—	1	4.000
	100	400 (J)	10	400 (RK5)	Screw-nut	—	—	1	4.000
	100	400 (J)	10	400 (RK5)	Screw-nut	—	—	1	4.000
	100	600 (J)	18	600 (RK5)	Screw-nut	—	—	1	6.135
	100	600 (J)	18	600 (RK5)	Screw-nut	—	—	1	6.135
	100	600 (J)	18	600 (RK5)	Screw-nut	—	—	1	6.135
	—	—	18⓫	1200 (L)	Screw-nut	—	—	1	20.910
	—	—	18⓫	1500 (L)	Screw-nut	—	—	1	21.880
	—	—	18⓫	1500 (L)	Screw-nut	—	—	1	25.620
	—	—	—	—	Screw-nut	2	4	1	57.500
	—	—	—	—	Screw-nut	2	4	1	58.400

⓫ IEC/EN/BS 60947-1 designation: Pillar terminal.
⓬ The contactor coil is controlled electronically; it can have either an AC or a DC supply and has a wide operating range.
Complete the order code only with the digit of the coil voltage.
Standard voltages are:
– AC/DC 024 = 24...60VAC/20...60VDC; 110 = 60...130VAC/DC; 230 = 100...250VAC/DC;
400 = 250...500VAC/DC.
⓭ The values in brackets indicate the class of the fuse to be used.
Where there is no value in brackets, any type of fuse can be used.
For protection with motor protection circuit breaker (type F combination motor controller) see chapter 1.

IEC utilisation current with poles in parallel
If the poles of the contactors are arranged in parallel, the operating current is the one indicated in the table multiplied by the **K** factor given below, which account for the unequal distribution of the current in the various poles.
To limit distribution inequality, it is advisable to use paralleling links (see pages 2-20, 2-25, 2-30 and 2-32).

2 POLES in parallel: **K** = 1.6
3 POLES in parallel: **K** = 2.2
4 POLES in parallel: **K** = 2.8

Certifications and compliance
Certifications obtained:

Type	c UL us	UL	CSA	EAC	CCC	RINA
BG09T4A	●			●	●	
BGF09T4A	●			●	●	
BGP09T4A⓱	c UL us			●	●	
BF09T4A	●		●	●	●	●
BF12T4A	●		●⓮	●	●	●
BF18T4A	●		●	●	●	●
BF26T4A	●		●⓮	●	●	●
BF38T4A	●		●⓮	●	●	●
BF40T4A	●			●	●	●
BF50T4A	●			●	●	●
BF65T4A	●⓯			●	●	●
BF80T4A	●			●	●	●
BF95T4A	●⓯					●
BF115T4A	●⓯					●
BF150T4A	●⓯					●
BF160T4E	●			●	●	
BF195T4E	●			●	●	
BF230T4E	●			●	●	
BF265T4E	●			⓯	⓯	
BF330T4E	●			⓯	⓯	
BF400T4E	●			⓯	⓯	
B5004	●			●		
B6304	●			●	●	
B63010004	●			●		
B12504				●		
B16004				●		

● Certified products.

UL - UL Listed, for USA and Canada (cULus File E93602) for BG and BF09...BF400 types indicated, as Motor Controllers – Contactors, except for BGP09... types which are UL Recognized, for USA and Canada (c UL us File E93602 – Component). Products having this type of marking are intended for use as components of complete workshop-assembled equipment.
BGP is UL rated up to 300V; for type with rating up to 600V, consult Technical support for information – see contact details on inside front cover.
UL Listed for USA and Canada (cULus - File E172189) for B5004... B63010004 and B5004SL... B6304SL types as Industrial Control Switches.

CSA - BF09...BF38 contactors are also CSA certified, for Canada only (File 54332).
In addition, BF12..., BF25... and BF38... types are CSA certified as "Elevator Equipment" (File 54332, class 2411); BF65..., BF95..., BF115... and BF150... are UL certified as "Elevator Equipment (File E 93602). See technical characteristics on page 2-72.

⓮ This contactor has also achieved elevator equipment certification.
⓯ Pending.

Compliant with standards: IEC/EN/BS 60947-1, IEC/EN/BS 60947-4-1, UL508, CSA C22.2 n° 14; UL 60947-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.
Plastic materials are compliant with standards IEC/EN/BS 60335; for all BF09...BF38 versions only, add suffix V260 to the standard product order code.
Example: BF09T4A230V260 for BF09, four-poles, 230V 50/60Hz coil with compliant plastic materials.

Contactors

Four-pole contactors with DC and AC/DC control circuit


BG09T4D


BF09T4D-BF18T4D
BF09T4L-BF18T4L


BF26T4D-BF38T4D
BF26T4L-BF38T4L


BF65T4E
BF80T4E


BF95T4E...BF150T4E


BF160T4E...BF230T4E

new


BF265T4E...BF400T4E

IEC/EN/BS 60947-4-1 characteristics

Order code DC coil	DC coil Low consumption	IEC operating current Ith (AC1) ≤40°C	≤55°C	≤70°C	Ie (AC3) ≤440V at ≤55°C	Maximum IEC power at ≤40°C (AC1) 230V	400V	415V	440V	500V	690V	1000V	UL/CSA details UL/CSA General (purpose) use
		[A]	[A]	[A]	[A]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	[A]
11BG09T4D❶	—	20	18	15	9	8	14	14	15	16	22	—	20
11BGF09T4D❶	—	20	18	15	9	8	14	14	15	16	22	—	20
11BGP09T4D❶	—	20	18	15	9	8	14	14	15	16	—	—	20❽
BF09T4D❶	**BF09T4L❷**	25	20	18	9	9.5	16	17	18	21	27	—	25
BF18T4D❶	**BF18T4L❷**	32	26	23	18	12	21	22	23	26	36	—	32
BF26T4D❶	**BF26T4L❷**	45	36	32	26	17	30	31	33	37	51	—	45
BF38T4D❶	**BF38T4L❷**	56 (60❾)	45 (48❾)	40 (42❾)	38	21	26	38	40	45	62	—	55
BF65T4E❸	—	100	80	70	65	38	65	68	72	82	114	165	100
BF80T4E❸	—	115	95	80	80	43	76	79	83	95	120	185	115
BF95T4E❸	—	140	115	100	95	53	92	96	101	115	159	230	140
BF150T4E❸	—	165	135	118	150	62	110	113	119	136	187	271	165
BF160T4E❹	—	250	210	180	160	95	165	171	181	206	284	411	250
BF195T4E❹	—	275	230	200	195	104	181	188	199	226	312	452	275
BF230T4E❹	—	350	290	250	230	132	230	239	253	288	397	576	350
BF265T4E❹	—	450	375	325	265	170	296	307	326	370	511	740	450
new **BF330T4E❹**	—	500	415	360	330	189	329	341	362	411	568	823	330
BF400T4E❹	—	600	500	435	400	227	395	410	434	494	681	987	400
11B500400❹❺	—	700	550	500	520	252	438	478	500	575	755	1100	700
11B630400❹❺	—	800	640	540	630	288	500	545	580	655	860	1250	800
11B63010004004❼	—	1000	850	700	—	350	600	630	725	750	1000	1600	1000

❶ Complete order code with coil voltage digit.
The BF09-BF38D types already have a standard supplied built-in TVS (Transient Voltage Suppressor).
Standard voltages are as follows:
– DC 012 / 024 / 048 / 060 / 110 / 125 / 220VDC.
Example: 11BG09T4D012 for mini-contactor BG09, four-poles, with 12VDC coil.

❷ Low consumption version. Complete the order code with coil voltage digit.
The BF09-BF38L types already have a standard supplied built-in TVS (Transient Voltage Suppressor).
Standard voltages are as follows:
– DC 024 / 048V
Example: BF09T4L024 for contactor BF09, four-poles, with 24VDC low-consumption coil.

❸ The contactor coil is controlled electronically; it can have either an AC or a DC supply and has a wide operating range.
Complete the order code only with the digit of the coil voltage.
Standard voltages are:
– AC/DC 024 = 20...48V; 110 = 60...110V; 230 = 100...250V.

❹ The coil of the contactor can be powered indifferently in AC or DC. Complete the order code only with the digit of the coil voltage.
Standard voltages are:
– AC/DC 24 / 48 / 60 / 110-125 indicate 110 / 220-240 indicate 220 / 380-415 indicate 380 / 440-480V indicate 440.
Example: 11B500400110 for contactor B500, four-poles, without auxiliary contacts and with 110-125VAC/DC coil.
Other voltages available on request.

❺ If predisposed for mechanical latch (G495), the order code becomes 11B...4SL00 ❹.
If already fitted with mechanical latch (G495), the order code becomes 11B...4L00 ❹ ❻.

❻ Indicate rated voltage of the mechanical latch, preceded by the letter C if in DC.
Standard voltages are:
– AC 50/60Hz 48 / 110-125 indicate 110 / 220-240 indicate 220 / 380-415V indicate 380
– DC 48 / 110-125 indicate 110 / 220-240V indicate 220.
Example: 11B500L00110C48 for contactor B500, four-poles, without auxiliary contacts, with 110-125VAC/DC coil and mechanical latch powered at 48VDC.

❼ G495 mechanical latch cannot be mounted.

❽ Maximum voltage is limited at 300V for UL. For certified type up to 600V consult Technical support for information; see contact details on inside front cover.

❾ For use at this other current value, a 16mm² cable, headed with a fork terminal, must be used.

تسلاکالا 021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com



B5004-B6304



B63010004

UL/CSA Short-circuit protection fuse, 600V⓬								
High fault		Standard fault		Type of terminal	Incorporated auxiliary contacts		Qty per pkg	Weight
Short circuit current	Fuse	Short circuit current	Fuse					
[kA]	[A]	[kA]	[A]		NO	NC	n°	[kg]
100	30 (J)	5	30	Clamp-screw	—	—	10	0.220
100	30 (J)	5	30	Faston	—	—	10	0.220
100	30 (J)	5	30	Rear PCB solder pin	—	—	10	0.242
100	30 (J)	5	60	Clamp-screw	—	—	1	0.498
100	60 (J)	5	80	Clamp-screw	—	—	1	0.498
100	100 (J)	5	100	Clamp-screw	—	—	1	0.665
100	100 (J)	5	150	Clamp-screw	—	—	1	0.665
100	200 (J)	10	200 (RK5)	Double lug-clamp	—	—	1	1.280
100	200 (J)	10	200 (RK5)	Double lug-clamp	—	—	1	1.280
100	200 (J)	10	250 (RK5)	Double lug-clamp	—	—	1	2.460
100	200 (J)	10	250 (RK5)	Double lug-clamp	—	—	1	2.460
100	400 (J)	10	400 (RK5)	Screw-nut	—	—	1	4.000
100	400 (J)	10	400 (RK5)	Screw-nut	—	—	1	4.000
100	400 (J)	10	400 (RK5)	Screw-nut	—	—	1	4.000
100	600 (J)	18	600 (RK5)	Screw-nut	—	—	1	8.100
100	600 (J)	18	600 (RK5)	Screw-nut	—	—	1	8.100
100	600 (J)	18	600 (RK5)	Screw-nut	—	—	1	8.100
—	—	18⓾	1200 (L)	Screw-nut	—	—	1	20.910
—	—	18⓾	1500 (L)	Screw-nut	—	—	1	21.880
—	—	18⓾	1500 (L)	Screw-nut	—	—	1	25.600

⓾ No UL/CSA ratings; data given for indication and reference purposes only.
⓫ The contactor coil is controlled electronically; it can have either an AC or a DC supply and has a wide operating range.
Complete the order code only with the digit of the coil voltage.
Standard voltages are:
– AC/DC 024 = 24...60VAC/20...60VDC; 110 = 60...130VAC/DC; 230 = 100...250VAC/DC;
400 = 250...500VAC/DC.
⓬ The values in brackets indicate the class of the fuse to be used.
Where there is no value in brackets, any type of fuse can be used.
For protection with motor protection circuit breaker (type F combination motor controller) see chapter 1.

IEC utilisation current with poles in parallel
If the poles of the contactors are arranged in parallel, the operating current is the one indicated in the table multiplied by the **K** factor given below, which account for the unequal distribution of the current in the various poles.
To limit distribution inequality, it is advisable to use paralleling links (see pages 2-20, 2-25, 2-30 and 2-32).

2 POLES in parallel: **K** = 1.6
3 POLES in parallel: **K** = 2.2
4 POLES in parallel: **K** = 2.8

Certifications and compliance
Certifications obtained:

Type	cULus	UL	CSA	EAC	CCC	RINA
BG09T4D	●			●	●	
BGF09T4D	●			●	●	
BGP09T4D⓱	cULus			●	●	
BF09T4D - BF09T4L	●		●	●	●	●
BF18T4D - BF18T4L	●		●	●	●	●
BF26T4D - BF26T4L	●		●⓯	●	●	●
BF38T4D - BF38T4L	●		●⓯	●	●	●
BF65T4E	●⓯			●	●	
BF80T4E	●			●	●	
BF95T4E	●⓯					
BF150T4E	●⓯					
BF160T4E	●			●	●	
BF195T4E	●			●	●	
BF230T4E	●			●	●	
BF265T4E	●			⓮	⓮	
BF330T4E	●			⓮	⓮	
BF400T4E	●			⓮	⓮	
B5004	●			●		
B6304	●			●	●	
B63010004	●			●		

● Certified products.


UL - UL Listed, for USA and Canada (cULus File E93602) for BG and BF09...BF400 types indicated, as Motor Controllers – Contactors, except for BGP09... types which are UL Recognized, for USA and Canada (cULus File E93602 – Component). Products having this type of marking are intended for use as components of complete workshop-assembled equipment.
BGP is UL rated up to 300V; for type with rating up to 600V, consult Technical support for information – see contact details on inside front cover.
UL Listed for USA and Canada (cULus - File E172185) for B5004... B63010004 and B5004SL... B6304SL types as Industrial Control Switches.

CSA - BF09...BF38 contactors are also CSA certified, for Canada only (File 54332).
In addition, BF12..., BF25... and BF38... types are CSA certified as "Elevator Equipment" (File 54332, class 2411); BF65..., BF95... and BF150... are UL certified as "Elevator Equipment (File E 93602).
See technical characteristics on page 2-72.

⓯ This contactor has also achieved elevator equipment certification.
⓮ Pending.

Compliant with standards: IEC/EN/BS 60947-1, IEC/EN/BS 60947-4-1, UL508, CSA C22.2 n° 14; UL 60947-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.
Plastic materials are compliant with standards IEC/EN/BS 60335; for all BF09...BF38 versions only, add suffix V260 to the standard product order code.
Example: BF09T4D024V260 for BF09, four-poles, 24VDC coil with compliant plastic materials.

SAFETY FIRST!

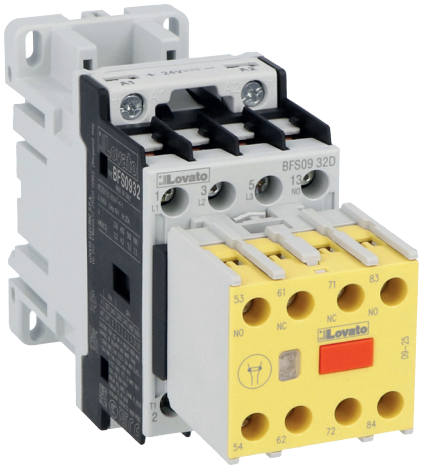


BFS... CONTACTORS

Designed for applications requiring a high degree of safety.
In particular, they meet the requirements of ISO 13849-1 (Safety of machinery - Safety-related parts of control systems) and IEC/EN 62061 (Safety of machinery - Functional safety of safety-related control systems). The BFS... contactors cover motor control currents from 9A to 38A AC-3 400V.




"MIRROR CONTACT" FUNCTION (IEC/EN 60947-4-1)

The NC auxiliary contact cannot be in the closed position at the same time as the NO main contact even in a fault condition (main contact welding).
A typical application of Mirror Contacts is to have highly reliable monitoring of the contactor status in the machine control circuit.

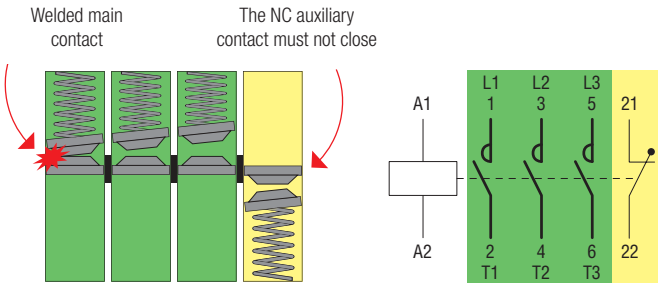


"MECHANICALLY LINKED CONTACTS" FUNCTION (IEC/EN 60947-5-1)


The NO and NC auxiliary contacts cannot be in closed position at the same time even in a fault condition (welding of NO or NC contacts).

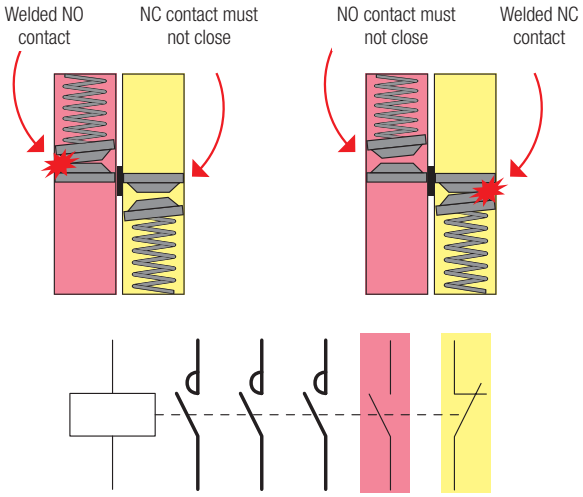

AUXILIARY CONTACT BLOCK WITH YELLOW COVER TO HIGHLIGHT DEVICES FORMING PART OF THE SAFETY CIRCUIT




AUXILIARY CONTACT BLOCK NOT REMOVABLE FROM CONTACTOR TO PREVENT TAMPERING

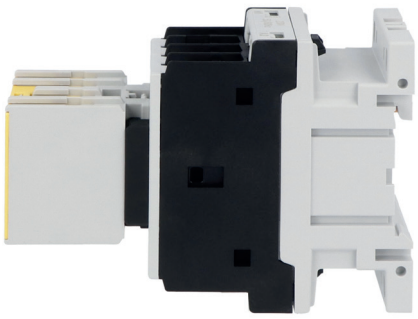

MANUAL OPERATION OR OPERATION WITH TOOLS PREVENTED BY GUARDS

CONTACTOR STATUS, OPEN/CLOSED, VISIBLE FROM THE FRONT




تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

Safety contactors BF series



BFS3222A...



BFS0932D024

Order code	IEC/EN details			UL/CSA details					
	Ith (AC1) ≤40°C	Ie (AC-3/AC-3e) ≤440V ≤55°C	Power (AC-3/AC-3e) 400V ≤55°C	Motor control		Incorporated auxiliary contacts		Qty per pkg	Wt
				480V 3ph	General (purpose) use				
	[A]	[A]	kW	[HP]	[A]	NO	NC	n°	kg
AC COIL. Terminals: clamp-screw.									
BFS0923A❶	25	9	4.2	5	25	2	3	1	0.388
BFS1223A❶	28	12	5.7	7 ½	28	2	3	1	0.388
BFS2523A❶	32	25	12.5	15	32	2	3	1	0.388
BFS3222A❶	56	32	16	20	56	2	2	1	0.485
BFS3822A❶	56	38	18.5	30	56	2	2	1	0.485
DC COIL. 24V. Terminals: clamp-screw.									
BFS0923D024	25	9	4.2	5	25	2	3	1	0.542
BFS1223D024	28	12	5.7	7 ½	28	2	3	1	0.542
BFS2523D024	32	25	12.5	15	32	2	3	1	0.542
BFS3222D024	56	32	16	20	56	2	2	1	0.607
BFS3822D024	56	38	18.5	30	56	2	2	1	0.607


❶ Complete order code with coil voltage digit.
Standard voltages are as follows:
– AC 50-60Hz 024 - 048 - 110 - 230V.

Operational characteristics
All application and technical characteristics of the BFS... contactors are identical to those of the standard BF... contactors shown from page 2-58 onwards.


Certification and compliance
Certifications obtained: cULus; UL Listed, for USA and Canada (cULus - File E93602), as Motor Controllers - Contactors.
Compliant with standards: IEC/EN/BS 60947-1, IEC/EN/BS 60947-4-1, IEC/EN/BS 60947-5-1, UL 60947-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.

Dimensions [mm (in)]


BFS0923A... - BFS1223A... - BFS2523A...

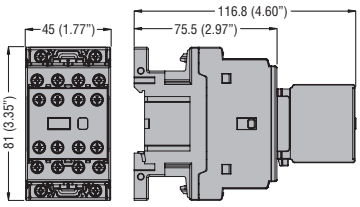


BFS3222A... - BFS3822A...

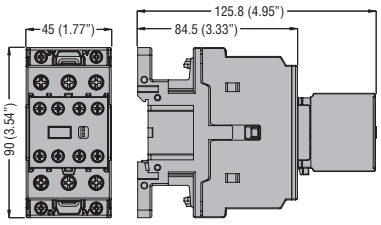

BFS0923D... - BFS1223D... - BFS2523D...

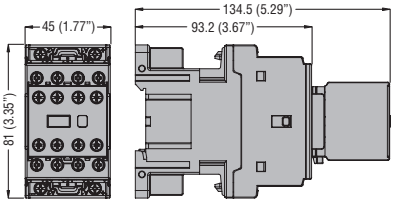


BFS3222D... - BFS3822D...

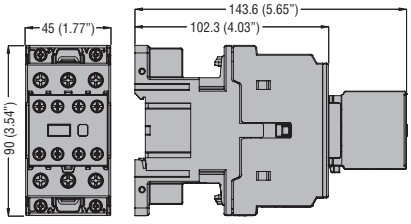


Wiring diagrams

BFS09...BFS25...

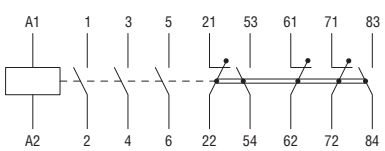

BFS32... BFS38...



Mini-contactor four power poles, 2 NO and 2 NC BG series



11BG09T2...

Order code	IEC rated conventional free air thermal current Ith ≤40°C	≤55°C	≤60°C	Qty per pkg	Wt
	[A]	[A]	[A]	n°	[kg]
AC COIL. Terminals: clamp screw.					
11BG09T2A❶	20	18	15	1	0.170
DC COIL. Terminals: clamp screw.					
11BG09T2D❷	20	18	15	1	0.175

Note: on 11BG09T2D, maximum 2 auxiliary contacts may be mounted.

Operational characteristics

Type	UL/CSA General use	Protection fuse IEC gG	Protection fuse UL K5	Conductor section	
	[A]	[A]	[A]	[mm²]	[AWG]
BG09...T2	20	20	30	0.75-2.5	18-12

Certifications and compliance
Certifications obtained: CCC, EAC; UL Listed, for USA and Canada (cULus - File E93602), as Motor Controllers - Contactors.
Compliant with standards: IEC/EN/BS 60947-1, IEC/EN/BS 60947-4-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.

Contactors four power poles,2 NO and 2 NC BF series



BF09T2...

Order code	IEC rated conventional free air thermal current Ith ≤40°C	≤55°C	≤60°C	Qty per pkg	Wt
	[A]	[A]	[A]	n°	[kg]
AC COIL. Terminals: clamp screw.					
BF09T2A❶	25	20	18	1	0.340
BF18T2A❶	32	26	23	1	0.340
BF26T2A❶	45	36	32	1	0.420
BF38T2A❶	56 (60❺)	45 (48❺)	40 (42❺)	1	0.420
BF80T2A❶	115	95	75	1	1.075
DC COIL. Terminals: clamp screw.					
BF18T2D❷❻	32	26	23	1	0.470
BF26T2D❷❻	45	36	32	1	0.540
BF38T2D❷❻	56 (60❺)	45 (48❺)	40 (42❺)	1	0.540
BF80T2E❹❼	115	95	75	1	1.125
DC COIL. Low consumption (2.4W). Terminals: clamp screw.					
BF18T2L❸❻	32	26	23	1	0.470
BF26T2L❸❻	45	36	32	1	0.540
BF38T2L❸❻	56 (60❺)	45 (48❺)	40 (42❺)	1	0.540

Operational characteristics

Type	UL/CSA General use	Protection fuse IEC gG	Protection fuse UL RK5	Conductor section	
	[A]	[A]	[A]	[mm²]	[AWG]
BF09T2	25	32	60	1-6	16-10
BF18T2	32	40	80	1-6	16-10
BF26T2	45	50	100	1.5-10	14-6
BF38T2	55	80	150	2.5-16	14-6
BF80T2	115	115	250	6-50	18-2

Certifications and compliance
Certifications obtained: EAC, CCC, RINA; UL Listed for USA and Canada (cULus - File E93602) and CSA certified for Canada (File 54332), as Motor Controllers - Contactors.
Compliant with standards: IEC/EN/BS 60947-1, IEC/EN/BS 60947-4-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.
Plastic materials are compliant with standards IEC/EN/BS 60335; for all BF09...BF38 versions only, add suffix V260 to the standard product order code.
Example: BF09T2A230 V260 for BF09, 2NO+2NC main poles, 230V 50/60Hz coil with compliant plastic materials).

Contactors four power poles, 4 NC BF series



BF18T0...

Order code	IEC rated conventional free air thermal current Ith ≤40°C	≤55°C	≤60°C	Qty per pkg	Wt
	[A]	[A]	[A]	n°	[kg]
AC COIL. Terminals: clamp screw.					
BF18T0A❶	32	26	23	1	0.340
BF26T0A❶	45	36	32	1	0.420
DC COIL. Terminals: clamp screw.					
BF18T0D❷❻	32	26	23	1	0.470
BF26T0D❷❻	45	36	32	1	0.540
DC COIL. Low consumption (2.4W). Terminals: clamp screw.					
BF18T0L❸❻	32	26	23	1	0,470

Operational characteristics

Type	UL/CSA General use	Protection fuse IEC gG	Protection fuse UL RK5	Conductor section	
	[A]	[A]	[A]	[mm²]	[AWG]
BF18T0	32	40	80	1-6	16-10
BF26T0	45	50	150	1.5-10	14-6

Certifications and compliance
Certifications obtained: EAC, CCC, RINA; UL Listed for USA and Canada (cULus - File E93602) and CSA certified for Canada (File 54332), as Motor Controllers - Contactors.
Compliant with standards: IEC/EN/BS 60947-1, IEC/EN/BS 60947-4-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.
Plastic materials are compliant with standards IEC/EN/BS 60335; for BF18 and BF26 versions only, add suffix V260 to the standard product order code.
Example: BF18T0A230V260 for BF18, four-NC main poles, 230VAC 50/60Hz coil with compliant plastic materials).

NOTE: The BF18-BF26T0D and BF18T0L types have a standard supplied built-in TVS (Transient Voltage Suppressor).

❶ Complete with coil voltage digit if 50/60Hz or with voltage digit followed by 60 if 60Hz. N.B.: For BF80T2, 50/60Hz coils are suitable for 50Hz only.
Standard voltages are:
– AC 50/60Hz 024 / 048 /110 / 230 / 400V
– AC 60Hz 024 60 / 048 60 / 120 60 / 220 60 / 230 60 / 460 60 / 575 60 (V).

Example:
– 11BG09T2A230 for mini-contactor BG09T2, 2 poles NO and 2 poles NC, with 230VAC 50/60Hz coil.
– 11BG09T2A46060 for mini-contactor BG09T2, 2 poles NO and 2 poles NC, with 460VAC 60Hz coil.

❷ Complete the order code with coil voltage digit.
Standard voltages are:
– DC 012 / 024 / 048 / 060 / 110 / 125 / 220V.
The BF18-BF26-BF38 T2D types already have a standard supplied built-in TVS (Transient Voltage Suppressor).
Example:
– 11 BG09T2D012 for mini-contactor BG09T2, 2 poles NO and 2 poles NC, with 12VDC coil.

❸ Low consumption version with built-in TVS. Complete the order code with coil voltage digit.
Standard voltages are:
– DC 024 / 048V.
Example:
– BF18T2L024 for contactor BF18T2, 2 poles NO and 2 poles NC, with 24VDC low-consumption coil, supplied with TVS.

❹ The contactor coil is controlled electronically; it can have either an AC or a DC supply and has a wide operating range.
Complete the order code with coil voltage digit.
Standard voltages are:
– AC/DC 024 = 20...48V; 110 = 60...110V; 230 = 100...250V.

❺ For use at this other current value, a 16mm² cable, headed with a fork terminal, must be used.

❻ Maximum combinations of add-on blocks are given on page 2-23.

❼ For BF80T2E... contactors, coil supply voltage must be AC or smoothed DC. For pulsating DC please consult our Technical support.

تسلاکالا 021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

3 pole contactors to connect in series for photovoltaic applications BF series



BFD6500A - BFD8000A

Order code	Operational current at 600V in DC1 ≤55°C with 3 poles in series 600V	1000V	Qty per pkg	Wt
	[A]	[A]	n°	[kg]
AC COIL. Terminals: double lug clamp.				
BFD6500A❶	75	35	1	1.020
BFD8000A❶	80	60	1	1.020

4 pole contactors to connect in series for photovoltaic applications BF series



BFD80T4...

Order code	Operational current at 600V in DC1 ≤55°C with 4 poles in series 600V	1000V	Qty per pkg	Wt
	[A]	[A]	n°	[kg]
AC COIL. Terminals: double lug-clamp.				
BFD80T4A❶	100	80	1	1.100
AC/DC COIL. Terminals: double lug-clamp.				
BFD80T4E❷	100	80	1	1.100
BFD150T4E❷	165	100	1	2.550

❶ Complete with coil voltage digit if 50/60Hz or with voltage digit followed by 60 if 60Hz. Standard voltages are:
– AC 50/60Hz 024 / 048 /110 / 230 / 400V
– AC 60Hz 024 60 / 048 60 / 120 60 / 220 60 / 230 60 / 460 60 / 575 60 (V).

❷ The contactor coil is controlled electronically; it can have either an AC or a DC supply and has a wide operating range.
Complete the order code with coil voltage digit.
Standard voltages are:
– AC/DC 024 = 20...48V; 110 = 60...110V; 230 = 100...250V.

General characteristics
The contactors are specifically made with magnetic elements in the arc extinction chambers to obtain high DC load operational capabilities. They are used to disconnect and isolate the load between the photovoltaic panel and the AC/DC inverter.
For add-on contact blocks, accessories and spare parts, consider indications of the corresponding standard contactors without the D letter in the code.


Italian Fire Department Directives
These directives provide for a disconnecting device for all current-carrying elements, that can be operated by remote control switch, placed in an easily reached and marked position, in order to safely isolate each part of the installation within the fire system compartment including the photovoltaic (PV) generator.
As an alternative, the PV generator must be installed, either externally of the fire system compartment or internally but in a dedicated compartment with adequate fire-resistant features. For such function, specifically designed contactors for on-load use in IEC DC1 duty up to 1000VDC are available.

Operational characteristics
Use in IEC DC1 duty


Type	Poles in series	IEC operational voltage Ue 400V	600V	800V	1000V
		IEC max current Ie in DC1 with L/R ≤1ms with 4 poles in series			
		[A]	[A]	[A]	[A]
BFD6500A...	3	100	75	45	35
BFD8000A...	3	100	80	65	60
BFD80T4A...	4	115	100	90	80
BFD80T4E...	4	115	100	90	80
BFD150T4E...	4	165	165	125	100

Certification and compliance
Compliant with standards: IEC/EN/BS 60947-1, IEC/EN/BS 60947-4-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.


Wiring diagrams
Three-pole contactor BFD6500..., BFD8000...

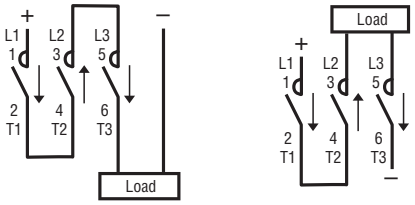


Four-pole contactors BFD80T4...

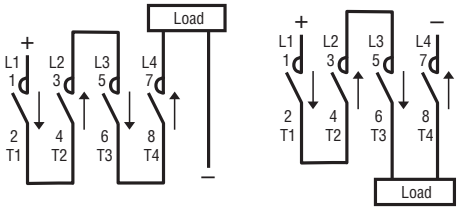

Four-pole contactors BFD150T4E....



BFK contactors (including limiting resistors)



BFK...

Order code	Maximum IEC operational power at ≤50°C (AC-6b)❶ 240V [kvar]	400V [kvar]	440V 480V [kvar]	690V [kvar]	NO ❷	Qty per pkg n°	Wt [kg]
AC COIL.							
BFK0910A❸	4.5	7.5	9	10	1	10	0.413
BFK1210A❸	7	12.5	14	16	1	10	0.413
BFK1810A❸	9	15	17	20	1	10	0.413
BFK2600A❸	11	20	22	25	–	10	0.472
BFK3200A❸	14	25	27.5	30	–	10	0.472
BFK3800A❸	17	30	33	36	–	10	0.472
BFK5000A❸	22	40	41	46	–	5	1.080
BFK6500A❸	26	45	50	56	–	5	1.080
BFK8000A❸	30	50	56	65	–	5	1.080
BFK9400A❸❹	34	60	75	80	–	5	1.080
BFK9500A❸	34	60	75	80	–	5	2.095
BFK11500A❸	45	75	85	135	–	5	2.095
BFK15000A❸	50	100	115	150	–	5	2.095

❶ To use the contactor in the delta, consult our Technical support, see contact details on inside front cover..
❷ NO auxiliary contacts available.
❸ The order code must be completed either with the coil voltage digit if 50/60Hz or with the coil voltage digit followed by the number 60 if 60Hz. Standard voltages are:
-- AC 50-60Hz 024 / 048 / 110 / 230 / 400VAC
-- AC 60Hz 024 60 / 048 60 / 120 60 / 220 60 / 230 60 / 460 60 / 575 60 (V).
Example: BFK0910A230 for contactor BFK09 with one NO contact and 230VAC 50/60Hz coil.
BFK0910A46060 for contactor BFK09 with one NO contact and 460VAC 60Hz coil.
❹ **NOTE: the maximum thermal current Ith of the BFK94 contactor is 115A.**

UL/CSA details
Maximum UL/CSA kvar ratings

	240V [kvar]	480V [kvar]	600V [kvar]
BFK0910A	4.5	9	10
BFK1210A	7	14	16
BFK1810A	9	17	20
BFK2600A	11	22	27.5
BFK3200A	14	27.5	32
BFK3800A	17	33	36
BFK5000A	22	41	46
BFK6500A	26	50	56
BFK8000A	30	60	75
BFK9500A	40	80	100
BFK11500A	45	90	120
BFK15000A	50	100	125

Operational characteristics

Type	IEC rated operational current ≤440V [A]	IEC - UL/CSA protection fuse gG-SC [A]
BFK09	12	16
BFK12	18	25
BFK18	23	40
BFK26	30	40
BFK32	36	63
BFK38	43	63
BFK50	58	80
BFK65	65	100
BFK80	75	125
BFK94	90	125
BFK95	90	125
BFK115	115	160
BFK150	144	160

Ambient operating temperature: ≤50°C. For ambient temperatures higher than 50°C and up to 70°C, the maximum operating power values indicated in the table must be reduced by a percentage equal to the difference between the operating ambient temperature and 50°C.
E.g.: using a BFK2600 contactor at the ambient temperature of 60°C, the maximum operating power
(at 400V) of the contactor will be equal to 20kvar – 10% = 18kvar.
Operating cycle: ≤120 cycles/h
Electrical life: ≥400,000 cycles.

Add-on auxiliary contacts
The following contact blocks, can be fitted on the BFK contactors: BFX12..., 11G418..., 11G481..., 11G482... and 11G218.

Certifications and compliance
Certification obtained (BFK9400A excluded):UL Listed for USA and Canada (cULus - File E93602), as Motor Controllers - Magnetic Capacitive Switches; CCC, EAC.
Compliant with standards: IEC/EN/BS 60947-1, IEC/EN/BS 60947-4-1, UL508, CSA C22.2 n° 14.
Plastic materials are compliant with standards IEC/EN/BS 60335; for BFK versions only, add suffix V260 to the standard product order code.

Kit to assemble BFK contactors



11G46...

Order code	For contactor	Qty per pkg n°	Wt [kg]
11G460	BF0910A - BF1210A - BF1810A - BF2600A - BF3200A - BF3800A	1	0.072
BFX10K3	BF5000A - BF6500A - BF8000A - BF9400A	1	0.078
BFX10K4	BF9500A - BF11500A - BF15000A	1	0.080

General characteristics
To optimise contactor stock management, a kit is available to transform normal three-pole contactors into BFK types for power factor correction. The table to the left indicates which kits to purchase depending on the standard contactor in stock.

تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

Control relays BG00 type



11BG00...



11BGF00...

Order code	Configuration and n°of contacts❺		Quantity per pkg.	Wt
	NO	NC	n°	[kg]
AC COIL. Terminals: clamp screw.				
11BG0040A❶	4	0	1	0.170
11BG0031A❶	3	1	1	0.170
11BG0022A❶	2	2	1	0.170
Terminals: Faston.				
11BGF0040A❶	4	0	1	0.160
11BGF0031A❶	3	1	1	0.160
11BGF0022A❶	2	2	1	0.160
DC COIL. Terminals: clamp screw.				
11BG0040D❷	4	0	1	0.175
11BG0031D❷	3	1	1	0.175
11BG0022D❷❻	2	2	1	0.175
Terminals: Faston.				
11BGF0040D❷	4	0	1	0.165
11BGF0031D❷	3	1	1	0.165
11BGF0022D❷	2	2	1	0.165
DC COIL. Low-consumption (2.3W). Terminals: clamp screw❼.				
11BG0040L❸	4	0	1	0.175
11BG0031L❸	3	1	1	0.175
11BG0022L❸	2	2	1	0.175
Terminals: Faston.				
11BGF0040L❸	4	0	1	0.165
11BGF0031L❸	3	1	1	0.165
11BGF0022L❸	2	2	1	0.165


Operational characteristics
- IEC rated insulation voltage Ui: 690V
- IEC rated conventional free air thermal current Ith: 10A
- UL/CSA and IEC/EN/BS 60947-5-1 designation:
  - BG types: A600-Q600
  - BF types: A600-P600
- Low-consumption version of BG types cannot accept additional contacts.

NOTE: no coil change or replacement is possible.

Certifications and compliance
Certification obtained: CCC, EAC, UL Listed for USA and Canada (cULus - File E93602), as Motor Controllers - Auxiliary contactors for all; RINA for BF00 types.
Compliant with standards: IEC/EN/BS 60947-1, IEC/EN/BS 60947-5-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.
Plastic materials are compliant with standards IEC/EN/BS 60335; for BF00 version only, add suffix V260 to the standard product order code.
Example: BF0040A230V260 for BF00 control relay having 4 NO auxiliary contacts and 230VAC 50/60Hz coil with compliant plastic materials.

NOTE: the BF00...D and BF00...L types have a standard supplied built-in TVS (Transient Voltage Suppressor).

Control relays BF00 type



BF00...A...



BF00...D...
BF00...L...

Order code	Configuration and n°of contacts❺		Quantity per pkg.	Wt
	NO	NC	n°	[kg]
AC COIL. Terminals: clamp screw.				
BF0040A❶	4	0	1	0.340
BF0031A❶	3	1	1	0.340
BF0022A❶	2	2	1	0.340
BF0004A❶	0	4	1	0.340
DC COIL. Terminals: clamp screw.				
BF0040D❷❹	4	0	1	0.470
BF0031D❷❹	3	1	1	0.470
BF0022D❷❹	2	2	1	0.470
BF0004D❷❹	0	4	1	0.470
DC COIL. Low consumption (2.4W). Terminals: clamp screw.				
BF0040L❸❹	4	0	1	0.470
BF0031L❸❹	3	1	1	0.470
BF0022L❸❹	2	2	1	0.470
BF0004L❸❹	0	4	1	0.470

❶ The order code must be completed either with the coil voltage digit if 50/60Hz or with the coil voltage digit followed by the number 60 if 60Hz. Standard voltages are:
– AC 50760Hz 024 / 048 / 110 - 230 / 400V
– AC 60Hz 024 60 / 048 60 /- 120 60 / 220 60 / 230 60 / 460 60 / 575 60 (V).
Example: 11BG0040A230 (auxiliary mini-contactor 4 NO auxiliary contacts supplied at 230VAC 50/60Hz).
BF0040A46060 (auxiliary contactor with 4 NO auxiliary contacts supplied at 460VAC 60Hz).

❷ Complete the order code with coil voltage digit. Standard voltages are:
– DC 012 / 024 / 048 / 060 / 110 / 125 / 220V.
Example: BF0040D012 (auxiliary contactor with 4 NO auxiliary contacts supplied at 12VDC).

❸ Low-consumption version. Complete the order code with coil voltage digit. Standard voltages are:
– DC 024 / 048V.
Example: 11BG0040L024 (low-consumption auxiliary mini-contactor with 4 NO auxiliary contacts supplied at 24VDC).

❹ Maximum combinations of add-on blocks are given on page 2-23.

❺ All contacts are highly conductive.

❻ On 11BG00222D, maximum 2 auxiliary contacts may be mounted.

❼ Auxiliary contact blocks and mechanical interlock cannot be mounted.



11BGX10... (20-11-02)
11BGX1111



11BGX10... (40-31-22-13-04)
11BGX1122




11BGXF...



11BGX77... -
11BGX78225 -
11BGX79...



11BGX5000



11SMX9021
11SMX9022

Order code	Characteristics	Max qty per contactor	Qty per pkg	Wt
		n°	n°	[kg]
Auxiliary contacts. Screw terminals.				
11BGX1002❶	2NC	1	10	0.021
11BGX1011❶	1NO + 1NC	1	10	0.021
11BGX1020❶	2NO	1	10	0.021
11BGX1004❷	4NC	1	10	0.028
11BGX1013❷	1NO + 3NC	1	10	0.028
11BGX1022❶	2NO + 2NC	1	10	0.028
11BGX1031❶	3NO + 1NC	1	10	0.028
11BGX1040❶	4NO	1	10	0.028
Auxiliary contacts for reversing and changeover assemblies. Screw terminals.				
11BGX1111❸	1NO + 1NC	1	10	0.021
11BGX1122❸	2NO + 2NC	1	10	0.028
Auxiliary contacts. Faston terminals.				
11BGXF1002❶	2NC	1	10	0.021
11BGXF1011❶	1NO + 1NC	1	10	0.021
11BGXF1020❶	2NO	1	10	0.021
11BGXF1004❷	4NC	1	10	0.028
11BGXF1013❷	1NO + 3NC	1	10	0.028
11BGXF1022❶	2NO + 2NC	1	10	0.028
11BGXF1031❶	3NO + 1NC	1	10	0.028
11BGXF1040❶	4NO	1	10	0.028
Mechanical interlock.				
11BGX5000❶	For BG...A and BG...D	1	10	0.008
Quick connect surge suppressors.				
11BGX77048	≤48VAC/DC (Varistor)	10		0.007
11BGX77125	48...125VAC/DC (Varistor)	10		0.007
11BGX77240	125...240VAC/DC (Varistor)	10		0.007
11BGX78225	≤225VDC (Diode)	10		0.007
11BGX79048	≤48VAC (Resistor-Capacitor)	10		0.007
11BGX79125	48...125VAC (Resistor-Capacitor)	10		0.007
11BGX79240	125...240VAC (Resistor-Capacitor)	10		0.007
11BGX79415	240...415VAC (Resistor-Capacitor)	10		0.007
Modular shroud.				
11BGX8000❹	IP40 front protection	20		0.006
Paralleling links.				
11G323❺	For 2 poles	10		0.009
11G324		10		0.009
11G325❺	For 4 poles	10		0.014
11G326		10		0.014
Rigid connecting kits.				
11SMX9021❻	Rigid connections for star-delta starter with BG... mini-contactors	10		0.040
11SMX9022❻	Rigid connections for reversing switches with BG... mini-contactors	1		0.026

❶ Cannot be used with BG...L types.
❷ Cannot be used with BG...D and BG...L types.
❸ Suitable for left-hand mini-contactor only of BGT and BGTP reversing and BGC changeover assemblies.
❹ The shroud can be used with BG... types with screw termination only and with no auxiliary contacts, surge suppressor or mechanical interlock mounted. It raises the front degree of protection of the mini-contactor when these are used in consumer switchboards.
❺ Cannot be used with BGX8000 shroud.
❻ Contactors with one NC auxiliary contact, 01 type, are usually used. The SM1 breaker can be directly fitted with rigid connector; type connection SM1X3040P for SM1P... breaker and connection SM1X3040R for SM1R... breaker. The relay cannot be directly mounted on the contactor. Use the RF38 type and the RFX3804 independent mounting base.

Operational characteristics

Type		BGX10... BGX11...	BGXF10...
IEC rated conventional free air thermal current Ith	A	10	10
IEC rated insulation voltage Ui	V	690	690
Minimum switching capacity		5V 10mA	
Terminals Screw		M3	Faston 1x6.3mm 2x2.8mm
Width	mm	6.9	6.9
Tightening torque	Nm	0.8...1	—
	lb.in	7...9	—
Conductor section maximum (with 1 or 2 cables)			
flexible without lug	mm^2	2.5	2.5
flexible with lug	mm^2	2.5	2.5
AWG	n°	14	14
UL/CSA and IEC/EN/BS 60947-5-1 designation	AC	A600	A600
	DC	Q600	Q600
Mechanical life (million)	cycles	20	20

SM1 breaker - mini-contactor connecting kit
See page 1-9.

Certifications and compliance
Certifications obtained:

Type	UL	cULus	EAC	CCC
BGX10...	—	●	●	●
BGX11...	—	●	●	●
BGXF10...	—	●	●	—
BGX5000	—	●	●	—
BGX7...	—	●	●	—
BGX8000	—	—	●	—
G32...	—	—	●	—
SMX90...	ᴿᵁ	—	—	—

● Certified products.


ᴿᵁ - UL Recognized for USA only (File E197069) as Panel and Switchboard Accessories - Component. Products having this type of marking are intended for use as components of complete workshop-assembled equipment.
cULus - UL Listed for USA and Canada (cULus - File E93601) as Auxiliary Devices - Component.

Compliant with standards: UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1; IEC/EN/BS 60947-1; IEC/EN/BS 60947-5-1 for auxiliary contacts.
The add-on auxiliary contact blocks 11BGX... and 11BGXF... comply with annex F of the IEC/EN/BS 60947-4-1 standard “auxiliary contact linked with power contact” also known as mirror contact. They also comply with annex L of the IEC/EN/BS 60947-5-1 standard “mechanically linked contact elements”.

تسلاکالا
021-9102 6126 | teslakala.com


تسلاکالا
021-9102 6126 | teslakala.com

Combinations: mounting position on BG...A and BG...D mini-contactors

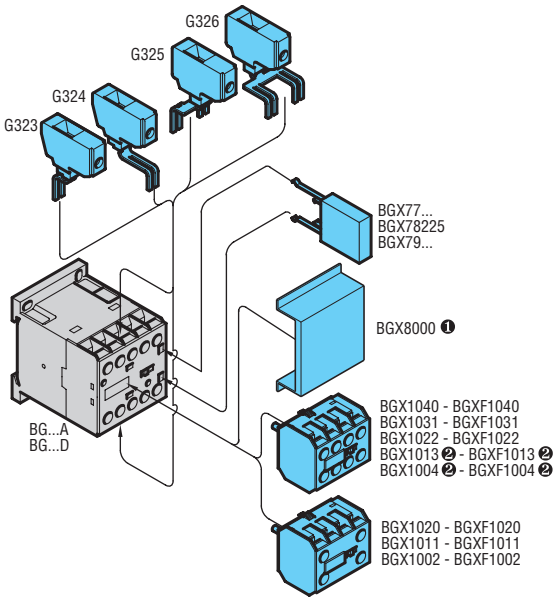


❶ Not suitable for mini-contactors BG... with auxiliaries contacts BGX10..., surge suppressor BGX7... and interlock BGX5000.
❷ Not suitable for BG...D types.

Combinations: mounting position on BG...L mini-contactors

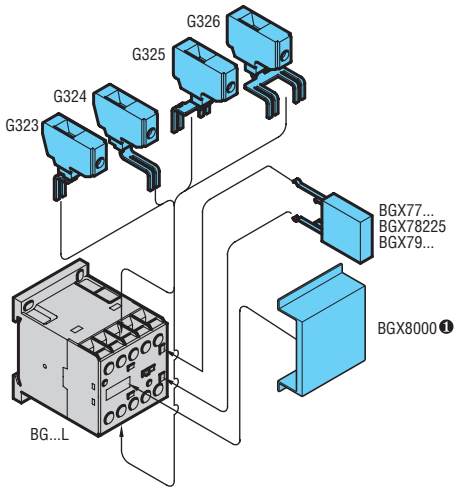


Combinations for reversing and changeover contactors assembled with BG...A and BG...D types

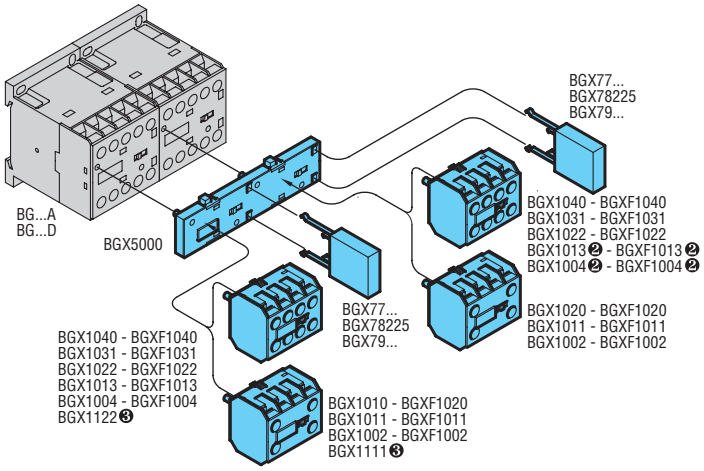


❷ Not suitable for BG...D types.
❸ For left-hand mini-contactor of BGT, BGTP and BGC contactor assemblies only.
See page 4-5.

Connections for reversing contactor assembly

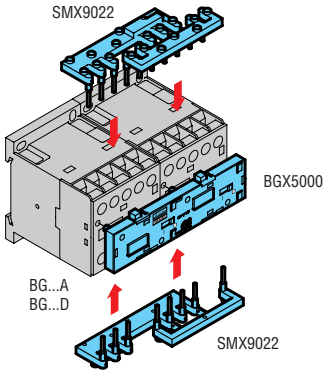

Connections for star-delta assembly

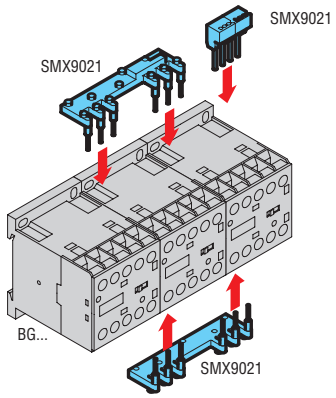


BFX10...


11G484...


BFX10...


11G418...


11G218


11G481...
11G482


11G428...


BFX12...


11G485...
11G486...
11G487

Order code	Characteristics	Max qty per cont.	Qty per pkg.	Wt
		n°	n°	[kg]
Auxiliary contacts with front center mounting ❷. Screw terminals.				
BFX1002❶	2NC	1	5	0.030
BFX1011❶	1NO + 1NC	1	5	0.030
BFX1020❶	2NO	1	5	0.030
11G48403❶	3NC	1	5	0.039
11G48412❶	1NO + 2NC	1	5	0.039
11G48421❶	2NO + 1NC	1	5	0.039
11G48430❶	3NO	1	5	0.039
BFX1004	4NC	1	5	0.048
BFX1013	1NO + 3NC	1	5	0.048
BFX1022	2NO + 2NC	1	5	0.048
BFX1031	3NO + 1NC	1	5	0.048
BFX1040	4NO	1	5	0.048
BFX101111	1NO+1NC and 1EM❸+1LB❹	1	5	0.048
Auxiliary contacts with front lateral mounting. Screw terminals❻.				
11G41801	1NC	2	10	0.014
11G41801D	1LB❸	2	10	0.014
11G41810	1NO	2	10	0.014
11G41810A	1EM❹	2	10	0.014
Auxiliary contacts with front lateral mounting. Faston terminals❼.				
11G218	1NO or 1NC reversible	2	10	0.011
11G48102	2NC	2	10	0.013
11G48111	1NO + 1NC	2	10	0.013
11G48120	2NO	2	10	0.013
11G482❷❺	Changeover contact	2	10	0.013
Adapter for auxiliary contact side mounting.				
11G280	for G218	2	10	0.008
11G419	for G418	2	10	0.010
11G483	for G481 and G482	2	10	0.010
Auxiliary contacts with low side mounting. Screw terminals.				
BFX1202❷	2NC	2	5	0.044
BFX1211❷	1NO+1NC	2	5	0.044
BFX1220❷	2NO	2	5	0.044
11G42801	1NC	2	10	0.024
11G42801D	1LB❸	2	10	0.024
11G42810	1NO	2	10	0.024
11G42810A	1EM❹	2	10	0.024
Delayed auxiliary contacts 1NO + 1NC (pneumatic operation) on energisation for front center mounting ❶❽. Screw terminals.				
11G4853	3s	1	1	0.040
11G4856	6s	1	1	0.040
11G48515	15s	1	5	0.040
11G48530	30s	1	5	0.040
11G48560	60s	1	5	0.040
11G485120	120s	1	1	0.040
Delayed auxiliary contacts 1NO + 1NC (pneumatic operation) on de-energisation for front center mounting ❶❽. Screw terminals.				
11G4863	3s	1	1	0.040
11G4866	6s	1	1	0.040
11G48615	15s	1	5	0.040
11G48630	30s	1	5	0.040
11G48660	60s	1	5	0.040
11G486120	120s	1	1	0.040
11G487	70ms	1	1	0.040

❶ The contacts can also be fitted on B type contactors using the adapter G358.See pages 2-32 and 2-33.
❷ Highly conductive contacts.
❸ Normally closed late-break contact.
❹ Normally open early-make contact.
❺ Gold-plated contacts inside tight casing for use in pollutant environments.
The Ith value refers to 125VAC and 30VDC.
Minimum applicable load: 5VDC 1mA.IEC IP20 protection is warranted to equipment wired with insulated Faston terminals.
❻ IEC IP20 protection is warranted to equipment wired with minimum 0.75mm² conductor section.
Designation in DC is Q600 for G418 and G419 types.
❼ IEC IP20 protection is warranted to equipment wired with insulated Faston terminals.
❽ IEC IP20 protection is warranted to equipment wired with minimum 1mm² conductor section.
Mechanical life is 3 million cycles.
❾ 1.5mm² for insulated bootlace ferrules.

Operational characteristics for add-on auxiliary contacts

Type			G418❽ G428❽ G485❽ G486❽ G487❽	G484 BFX10 BFX12	G218❼ G481❼	G482❺
IEC conventional free air thermal current Ith		A	10	10	10	0.15❺
IEC rated insulation voltage Ui		V	690	690	690	690
Minimum switching capacity			5V 10mA			5V 1mA
Terminals	Screw		M3.5	M3	—	—
	Width	mm	7	7	—	—
	Faston		—	—	1x6,35 2x2.8	1x6,35 2x2.8
Tightening torque		Nm	0.8...1	0.8...1	—	—
		lb.in	7...9	7...9	—	—
Conductor section maximum with (1 or 2 cables						
	flexible w/o lug	mm²	2.5	2.5❾	—	—
	flexible c/w lug	mm²	2.5	2.5	2.5	2.5
	AWG	n°	14	14	14	14
Terminal protection per IEC/EN/BS 60529			IP20	IP20	IP20❼	IP20❺
UL/CSA and IEC/EN/BS 60947-5-1 designation		AC	A600	A600	A600	—
		DC	P600❻	Q600	P600	—
Mechanical life (million)		cycles	10❽	10	10	10

SM1 breaker - contactor connecting kit
See page 1-9.

Maximum assembly combination of add-on blocks
See pages 2-23 and 2-26...27.

Certifications and compliance
Certifications obtained:

Type	UL	cULus	CSA	EAC	CCC
BFX10...	—	●	—	●	●
BFX12...	—	●	—	●	—
G218	𝓤𝓛	—	●	●	—
G418..., G428...	𝓤𝓛	—	●	●	—
G481...	𝓤𝓛	—	●	●	—
G482	𝓤𝓛	—	●	●	—
G484...	𝓤𝓛	—	●	●	—
G485...	𝓤𝓛	—	●	●	—
G486...	𝓤𝓛	—	●	●	—
G487...	𝓤𝓛	—	●	●	—

● Certified products.

𝓤𝓛 - UL Recognized for USA only (File E93601) as Auxiliary Devices - Component.
Products having this type of marking are intended for use as components of complete workshop-assembled equipment.
cULus - UL Listed for USA and Canada (cULus - File E93601) as Auxiliary Devices.
CSA - CSA certified for Canada only (File 54332) as Auxiliary Devices for motor controllers.


Add-on auxiliary contacts are compliant with the following standards: IEC/EN/BS 60947-1, IEC/EN/BS 60947-5-1, UL 60947-1, UL 60947-5-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-5-1.
The add-on auxiliary contact blocks BFX10... (BFX101111 excluded) and BFX12... comply with annex F of the IEC/EN/BS 60947-4-1 standard “auxiliary contact linked with power contact” also known as mirror contact. They also comply with annex L of the IEC/EN/BS 60947-5-1 standard “mechanically linked contact elements”.
For the BF40...BF150 contactors, compliance with annex L of the IEC/EN/BS 60947-5-1 standard applies only to the versions with electronically controlled AC/DC coil.

تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

BF00A, BF09A...BF150A, BF40E...BF150E


Maximum assembly combination for alternating-current contactors BF00A, BF09A...BF150A.
Maximum assembly combination for alternating/direct-current contactors BF40E...BF150E.

			Front centre mount					Front lateral mount			Side mount	
												
			BFX1002	BFX1004	G485...	G222...❹		BFX5002	BFX5303	G418...	G428...	BFX1202
			BFX1011	BFX1013	G486...	G272...❹		BFX5003 ❶	BFX5403 ❾	G218 G481...	G419+ G418...	BFX1211
			BFX1020	BFX1022	G487	BFX641... ❹				G482	G280+ G218	BFX120
				BFX1031							G483+ G481...	BFX5000 ❸❽
				BFX1040							G483+ G482	BFX5001 ❸❽
			n° of blocks 1 type only			n° of blocks		n° of blocks 1 type only		n° of blocks	n° of blocks	n° of blocks
Contactors	Control relay	BF00A	1	1	1	1 ❺	OR +	1	—	1 or 2 ❶	1 or 2 ❶	1 ❸
	Three-poles	BF09A...BF25A	1	1	1	1 ❺		1	—	1 or 2 ❶	1 or 2 ❶	1 ❸
		BF26A...BF38A	1	1	1	1 ❺		1	—	1 or 2 ❶	1 or 2 ❶	1 ❸
		BF40A...-BF150A	1	1	1	1 ❺		—	1 ❿	1 or 2 ❶	2	1 ❸
		BF40E...-BF150E	1	1	1	1 ❺		—	1 ❿	1 or 2 ❶	2	1 ❸
	Four-poles	BF09A...BF25A	1	1	1	1 ❺		1	—	1 or 2	1 or 2 ❶	1 ❸
		BF26A...BF38A	1	1	1	1 ❺		1 ❸	—	1 ❶	1 or 2 ❶	1 ❸
		BF40A...-BF150A	1	1	1	1 ❺		—	1 ❿	1 or 2	2	1 ❸
		BF40E...-BF150E	1	1	1	1 ❺		—	1 ❿	1 or 2	2	2

❶ Cannot be fitted with BFX10... with 4 contacts and G222.
❷ To fit the mechanical interlock, the add-on fourth pole needs to be mounted on the left side of the one of the contactors.
❸ One only side-mount block can be fitted on each contactor whenever the BFX500... interlock is mounted.
❹ One BFX10... or delayed G48... contact block can be mounted on the G222, G272 or BFX641 mechanical latch.
❺ G222 mechanical latch.
❻ G272 mechanical latch for BF40...BF80; BFX641 for BF95...BF150.
❽ For BF40...BF94 code BFX5300 or BFX5301; for BF95...BF150 code BFX5400 or BFX5401.
❾ BFX5303 for BF40...BF94; BFX5403 for BF95...BF150.
❿ BFX5303 cannot be mounted if a contact block BFX10... with 4 contacts (BFX1004, BFX1013, BFX1022, BFX1031, BFX1040) is installed.

BF00D, BF09D...BF38D, BF00L, BF09L...BF38L

Maximum assembly combination for direct-current contactors BF00D, BF09D...BF38D.
Maximum assembly combination for direct-current contactors BF00L, BF09L...BF38L with low consumption.

			Front centre mount													Front lateral mount		Side mount	
																			
			BFX10...			BFX10...									G485...	G222... ❹		1 type only BFX50...			BFX12... ❸
			...02	...11	...20	...04	...13	...22	...31	40					G486.. G487			...02	...03 ❶	...00	...01	
			n° of blocks 1 type only													n° of blocks		n° of blocks 1 type only			
Contactors	Control relay	BF00D	1			1		1							1	1	OR +	1	1	1	1
		BF00L	1			—		1							—	1		1	1	—	—
	Three-poles	BF09D-BF25D	1			1		1							1	1		1	1	1	1
		BF26D-BF38D	1			1		1							1	1		1	1	1	1
		BF09L-BF25L	1			—		1							—	1		1	1	—	—
		BF26L-BF38L	1			—		1							—	1		1	1	—	—
	Four-poles	BF09D-BF25D	1			1		1							1	1		1	1	1	1
		BF26D-BF38D	—	1		—		—							—	1		1❼	1❼	1	1
		BF09L-BF25L	1			—		1							—	1		1	1	—	—
		BF26L-BF38L	—	1	—	—		—							—	—		1❼	1❼	—	—

❶ Mounting of BFX5003 interlock is not possible when BFX10... block with 4 contacts and G222 latch are mounted.
❸ One only side-mount block can be fitted on each contactor whenever the BFX500... interlock is mounted.
❹ One BFX10... or delayed G48... contact block can be mounted on the G222 or G272 mechanical latch.
❼ To fit the mechanical interlock, the add-on fourth pole needs to be mounted on the left side of the one of the contactors.
For other assembly combination, consult Technical support (E-mail: service@LovatoElectric.com).

Dimensions pages 2-47 and 48
Wiring diagrams pages 2-55 and 56

تسلاکالا
021-9102 6126 | teslakala.com



BFX42
BFXD42



BFX5000
BFX5300
BFX5400



BFX5001
BFX5301
BFX5401



BFX5002





BFX5003
BFX5303
BFX5403



11G222...
11G272...
BFX641...



11G454
11G455
BFX642



BFX77...
BFX79...

Order code	Characteristics	Max qty per cont.	Qty	Wt
		n°	n°	[kg]
Fourth pole.				
BFX42	For BF26A, BF32A, BF38A	1	1	0.100
BFXD42	For BF26D, BF32D, BF38D, BF26L, BF32L, BF38L	1	1	0.108
BFX43	For BF40A... BF94A and BF40E...BF94E	1	1	0.150
BFX44	For BF95A...BF150A and BF95E...BF150E	1	1	0.500
Mechanical interlock.				
BFX5000❶	Side mount for BF00, BF09...BF38	1	5	0.039
BFX5001❶	Side mount with 2NC contacts for BF00, BF09...BF38	1	5	0.052
BFX5002	Front mount, low contacts for BF00, BF09...BF38	1	5	0.006
BFX5003	Front mount for BF00, BF09...BF38	1	5	0.023
BFX8910	Spacer for interlocking BF09...BF38 AC/DC with types in DC	1	10	0.017
BFX5300	Side mount for BF40...BF94 A/E	1	5	0.039
BFX5301	Side mount with 2NC contacts for BF40...BF94 A/E	1	5	0.052
BFX5303	Front mount for BF40...BF94 A/E	1	5	0.034
BFX5400	Side mount for BF95...BF150 A/E	1	5	0.039
BFX5401	Side mount with 2NC contacts for BF95...BF150 A/E	1	5	0.052
BFX5403	Front mount for BF95...BF150 A/E	1	5	0.034
Mechanical latch. Screw terminals.				
11G222❷	For BF00, BF09...BF38	1	1	0.070
11G272❷	For BF40...BF94	1	1	0.070
BFX641...❷	For BF95...BF150	1	1	0.070
Manual closing mechanism.				
11G454	For BF00, BF09...BF38	1	1	0.021
11G455	For BF40...BF94	1	1	0.021
BFX642	For BF95...BF150	1	1	0.021
Quick connect surge suppressors for BF00A, BF09A...BF150A contactors.				
BFX77048	≤48VAC/DC (Varistor)		5	0.012
BFX77125	48...125VAC/DC (Varistor)		5	0.012
BFX77240	125...240VAC/DC (Varistor)		5	0.012
BFX79048	≤48VAC (Resistor-Capacitor)		5	0.012
BFX79125	48...125VAC (Resistor-Capacitor)		5	0.012
BFX79240	125...240VAC (Resistor-Capacitor)		5	0.012
BFX79415	240...415VAC (Resistor-Capacitor)		5	0.012

NOTE: All contactors BF series, equipped with DC or AC/DC electronic coil, have built-in surge suppressor filter.

❶ Different sized contactors can be interlocked.
Example: BF09...BF25 with BF26...BF38.

❷ Replace with the digit of the voltage if 50 or 60Hz and with the letter C followed by the digit of the voltage if DC. Standard voltages are:
– AC 50/60Hz 24 (indicate 24) - 48 (indicate 48) - 110...125 (indicate 110) 220...240 (indicate 220) - 380...415V (indicate 380).
– DC 12 (indicate 12) - 24 (indicate 24) - 48 (indicate 48) 110...125 (indicate 110) - 220...240V (indicate 220).

Operational characteristics

Type		BFX42 BFXD42	BFX43	BFX44	BFX5001 BFX5301 BFX5401
IEC conventional free air thermal current Ith	A	56	115	165	10
IEC rated insulation voltage Ui	V	690	1000	1000	690
Minimum switching capacity		5V 10mA			
Terminals: Screw		M4	M6	M8	M3
Width	mm	12.5	9.6	14.5	7
Tightening torque	Nm	2.5...3	4...5	5.5...6.5	0.8...1
	lb.in	21.6...26.4	35.4...44.2	48...57	7...9
Conductor section maximum with 1 or 2 cables flexible w/o lug	mm^2	16	35	70	2,5
flexible c/w lug	mm^2	16	35	70	2,5
AWG	n°	6	2	2/0	14
Terminal protection for IEC/EN/BS 60529		IP20❸	IP20❸	IP20❸	IP20
UL/CSA and IEC/EN/BS 60947-5-1 designation	AC	—	—	—	A60
	DC	—	—	—	Q600
Mechanical life (million)	cycles	20	15	15	10

Type			G222...	G272...	BFX641
Rated control circuit voltage	AC (50/60Hz)	V	24...415	24...415	24...415
	DC	V	12...240	12...240	12...240
Power consumption with control:	AC	VA	40	40	40
	DC	W	70	70	70
Minimum energising:	drop-out	ms	10	10	10
	pick-up	ms	100	200	200
Tightening torque		Nm	0.8...1	0.8...1	0.8...1
		lb.in	7...9	7...9	7...9
Conductor section Maximum with 1 or 2 cables flexible w/o lug		mm^2	4	4	4
flexible c/w lug		mm^2	2.5	2.5	2.5
AWG		n°	14...12	14...12	14...12
Mechanical life (million)		cycles	0.1	0.1	0.01

❸ The condition is front IP20 protection.

Maximum assembly combination of add-on blocks
See pages 2-23, 2-26...27.

Certifications and compliance
Certifications obtained:


Type	UL	cULus	CSA	EAC
BFX42 - BFXD42 - BFXD43	—	●	—	●
BFX5...	—	●	—	●
BFX77... - BFX79...	—	●	—	●
G222... - G272... - BFX641	ᴿᵁ	—	●	●

● Certified products.

ᴿᵁ - UL Recognized for USA only (File E93601) as Auxiliary Devices Component.
Products having this type of marking are intended for use as components of complete workshop-assembled equipment.
cULus - UL Listed for USA and Canada (cULus - File E93602) as Magnetic motor controllers.
CSA - CSA certified for Canada only (File 54332) as Auxiliary Devices for motor controllers.


Compliant with standards: IEC/EN/BS 60947-1, UL 60947-1, CSA C22.2 n° 60947-1. IEC/EN/BS 60947-5-1, UL 60947-5-1, CSA C22.2 n° 60947-5-1 for auxiliary contacts IEC/EN/BS 60947-4-1, UL 60947-4-1, CSA C22.2 n° 60947-4-1 for four-poles.

تسلاکالا
021-9102 6126 | teslakala.com




BFX310...
BFX3201


BFX3301
BFX3401




BFX3131
BFX3231




BFX3331
BFX3431



BFX3361
BFX3461



BFX3371
BFX3471



BFX833
BFX834



BFX3393



BFX3392
BFX3492



11BA135
11BA235



11BA435



11G231
11G232



BFX3399



BFX8901



BFX80



BFX8902

Order code	Characteristics	Qty per pkg	Wt
		n°	[kg]
Rigid connecting kits for three-pole reversing contactor assembly.			
BFX3101	For contactors BF09...BF25 side by side with BFX5002 or BFX5003 mechanical interlock	1	0.052
BFX3102	For contactors BF09...BF25 side by side with BFX5000 or BFX5001 mechanical interlock	1	0.054
BFX3201	For contactors BF26...BF38 side by side with BFX50... mechanical interlock	1	0.060
BFX3301	For contactors BF40...BF94 side by side with BFX5303 mechanical interlock	1	0.150
BFX3401	For contactors BF95...BF150 side by side with BFX5403 mechanical interlock	1	0.200
Rigid connecting kits for star-delta starters.			
BFX3131	For contactors BF09...BF25	1	0.058
BFX3231	For contactors BF26...BF38	1	0.064
BFX3232	For contactors BF26...BF38 (L/Δ) BF09...BF25 (Ⲗ)	1	0.064
BFX3332	For contactors BF40...BF94 (L/Δ) BF26...BF38 (Ⲗ)	1	0.200
BFX3331	For contactors BF40...BF94	1	0.220
BFX3432	For contactors BF95...BF150 (L/Δ) BF40...BF94 (Ⲗ)	1	0.250
BFX3431	For contactors BF95...BF150	1	0.270
Rigid connecting kits for changeovers.			
BFX3361	For three-pole contactors BF40...BF94 with BFX5300/BFX5301 mechanical interlock	1	0.150
BFX3461	For three-pole contactors BF95...BF150 with BFX5400/BFX5401 mechanical interlock	1	0.200
BFX3371	For four-pole contactors BF40...BF80 with BFX5300/BFX5301 mechanical interlock	1	0.200
BFX3471	For four-pole contactors BF95...BF150 with BFX5400/BFX5401 mechanical interlock	1	0.300
IP20 protection for power terminals. 2 pieces for each contactor are required.			
BFX833	For three-pole contactors BF40...BF94	10	0.020
BFX834	For three-pole contactors BF95...BF150	10	0.030
Non-insulated paralleling links.			
11BA135	2 poles for contactors BF09...BF25 types	10	0.001
11BA235	2 poles for contactors BF26...BF38 types	10	0.003
BFX3392	2 poles for contactors BF40...BF94 types	4	0.022
BFX3492	2 poles for contactors BF95...BF150 types	4	0.027
BFX3393	3 poles for contactors BF40...BF94 types	4	0.038
11BA435	3 poles for contactors BF95...BF150 types	10	0.030
Insulated paralleling link with terminal.			
BFX3399	3 poles (for contactors BF40...BF94) Conductor section connectable: 25...95mm² (95mm² without lug)	10	0.135
One-pole enlarged terminals.			
11G231	1x6mm² for contactors BF09...BF25 types	12	0.009
11G232	1x16mm² for contactors BF26...BF38 types	12	0.014
Sealing cover.			
BFX80	Sealing cover for contactors BF00 and BF09...BF38	10	0.001
Screw fixing adapters for contactors.			
BFX8901	Universal base to screw fix BF09...BF38 contactors	5	0.016
BFX8902	Screw fixing brackets for BF09...BF38 contactors	10	0.002
Marking element for BF00, BF09...BF150 contactors.			
BFX30	Blank label for writing	50	0.001

Operational characteristics

Type		BFX3399	11G231	11G232
Tightening torque	Nm	13Nm	1.5-1.8	2.5-3
	lb.in	115	13.2-18	7-9
Tool	Type	Allen key 6	PH1	PH2


Certifications and compliance
Certifications obtained: UL Listed for USA and Canada (cULus - File E93602), for all connecting kits for starters and changeovers BFX3... ; EAC.
Compliant with standards: IEC/EN/BS 60947-1, UL 60947-1, CSA C22.2 n° 60947-1.

Dimensions
pages 2-48 and 49

Wiring diagrams
page 2-56


Add-on blocks for AC and AC/DC contactors

Combinations: mounting position on BF00A and BF09A...BF150A contactors
Table with combinations: See page 2-23.

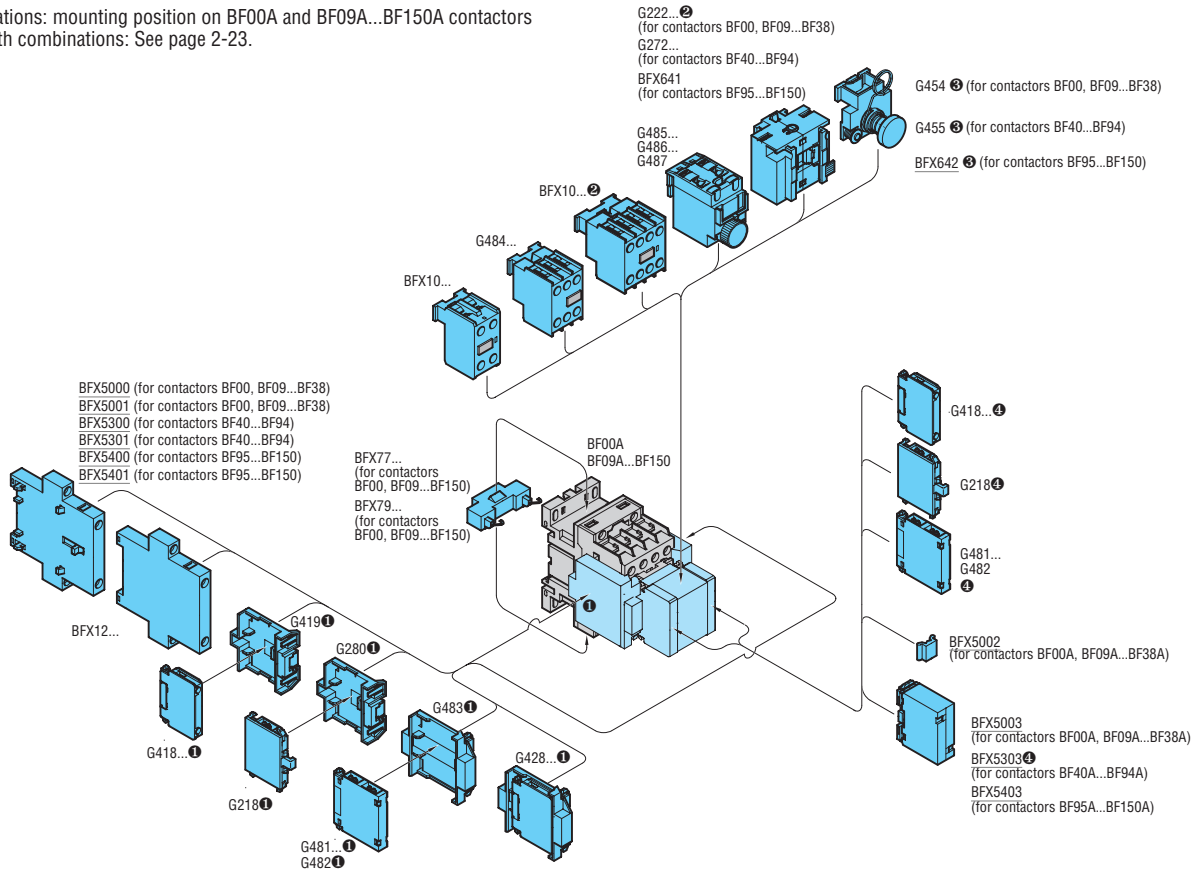


❶ Mounting is not possible if front lateral contacts or mechanical interlock BFX5000 or BFX5001 are mounted. BF00, BF09...38 cannot be fitted with BFX10 with 4 contacts or G222...
❷ Refer to the diagrams below for use of G222..., G272... and BFX641...; see also the table of combinations on page 2-23.
❸ No add-on block can be mounted on front when the manual closing mechanism G454 or G455 is fitted.
❹ This accessory, for contactors BF09...BF94, cannot be mounted if a contact block BFX10... with 4 contacts (BFX1004, BFX1013, BFX1022, BFX1031, BFX1040) is installed.

Combinations: mounting position on BF00A and BF09A-BF38A contactors with mechanical latch G222 fitted.
Table with combinations: See page 2-23.

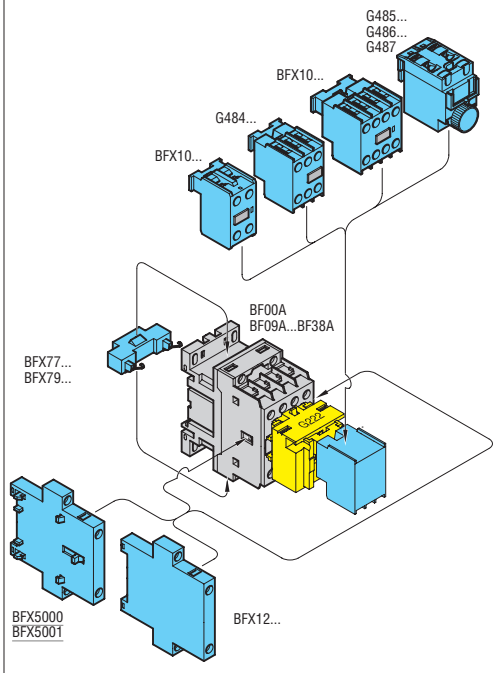

Combinations: mounting position on BF40A...150A, BF40E...BF150E, contactors with mechanical latch G272 fitted.
Table with combinations: See page 2-23.

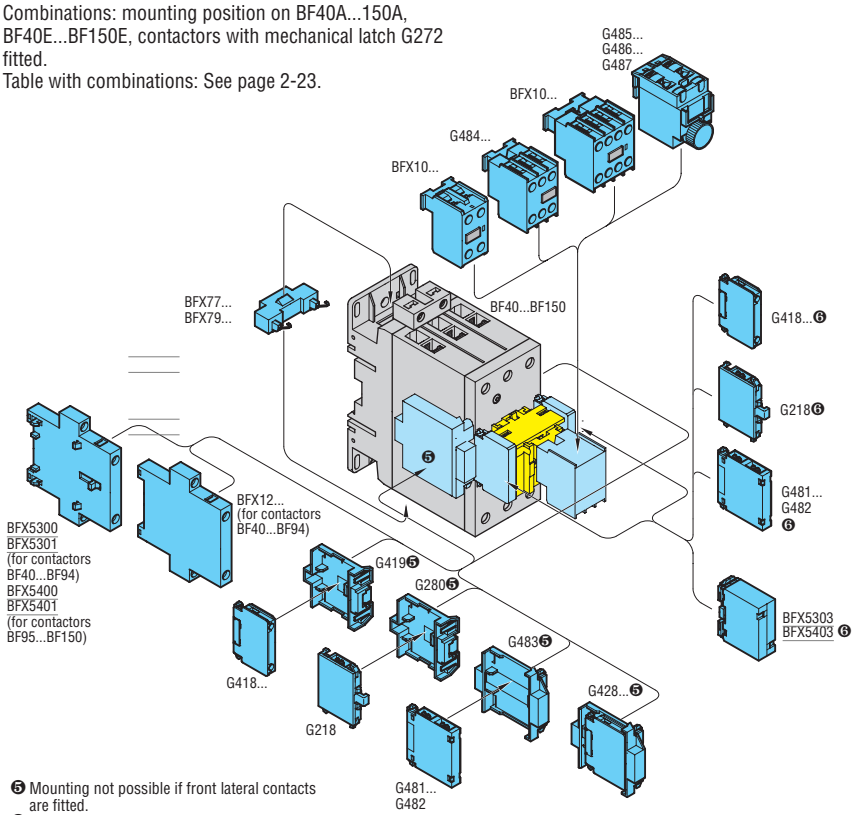


❺ Mounting not possible if front lateral contacts are fitted.
❻ Mounting only for BF95...BF150.

تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

Add-on blocks for DC and DC low consumption contactors


Combinations: mounting position on BF00 and BF09-BF38, D and L versions
Table with combinations: See page 2-23.

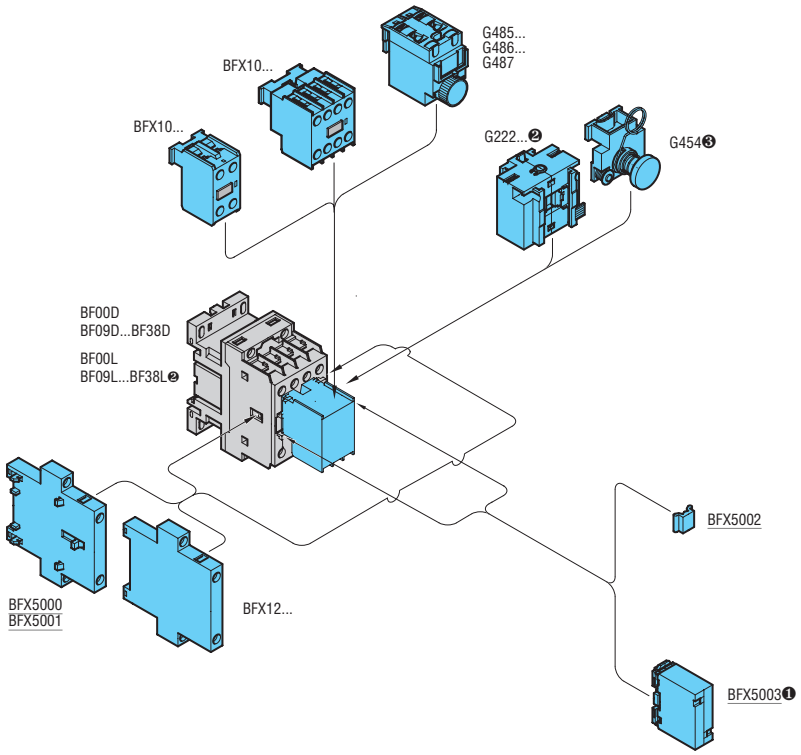

❶ Mounting not possible when the G222 mechanical latch is fitted.
❷ The G222 mechanical latch cannot be fitted on BF26L - BF38L four-pole types.
❸ No add-on block can be mounted on front when the G454 manual closing mechanism is fitted.


Accessories for AC, DC and DC low consumption contactors

Combinations

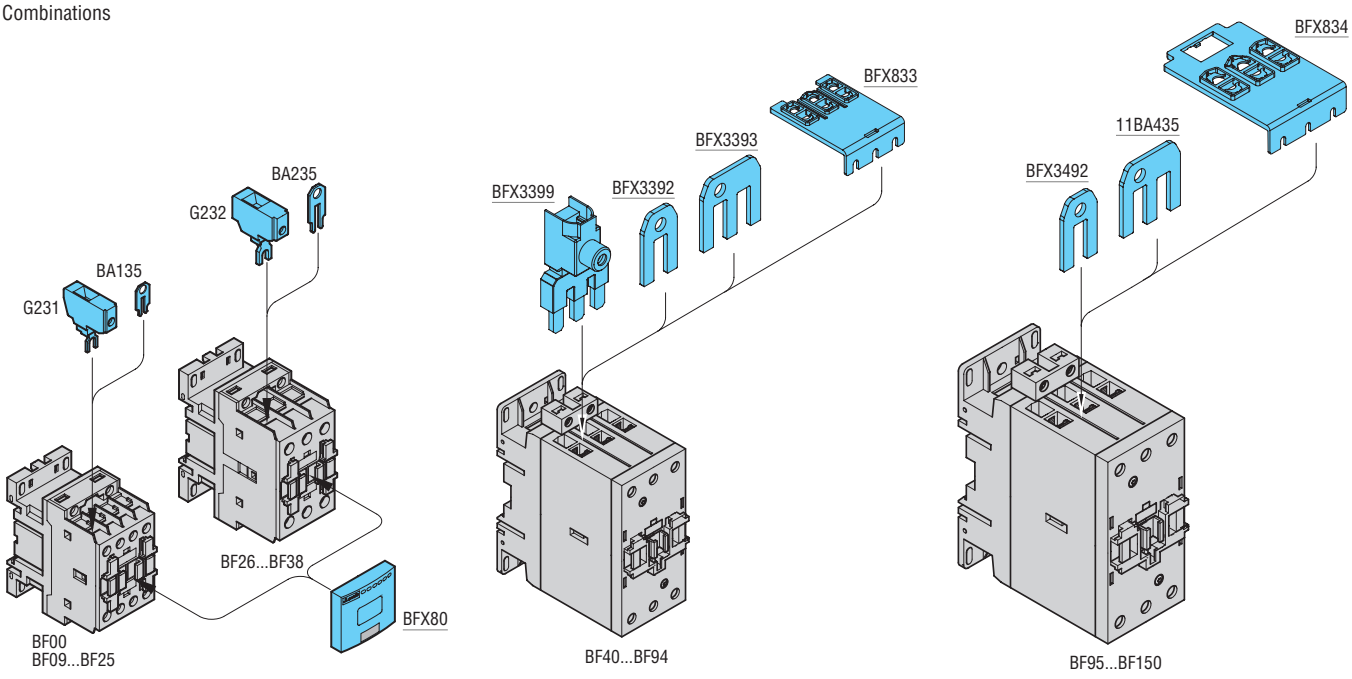


Accessories for AC, DC and DC low consumption contactors


Rigid connecting kits for three-pole reversing contactor assembly. For BF09...BF25

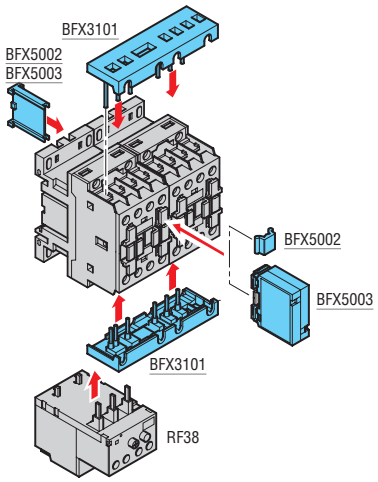


Rigid connecting kits for three-pole reversing contactor assembly. For BF09...BF25 and mechanical interlock BFX5000 or BFX5001

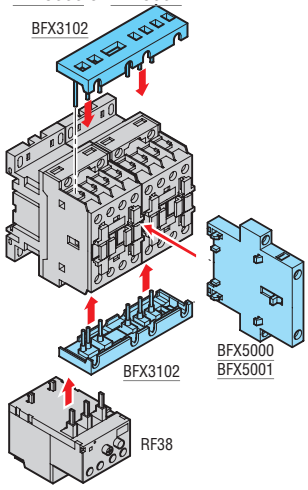


Rigid connecting kits for three-pole reversing contactor assembly. For BF26...BF38

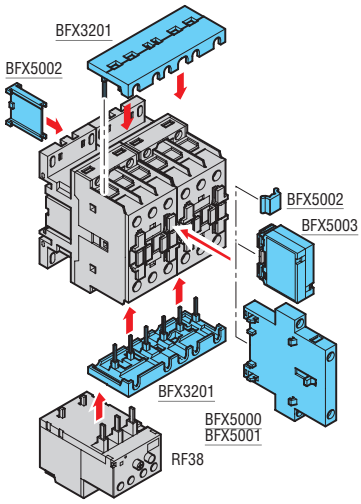


Rigid connecting kits for three-pole reversing contactor assembly. For BF40...BF94

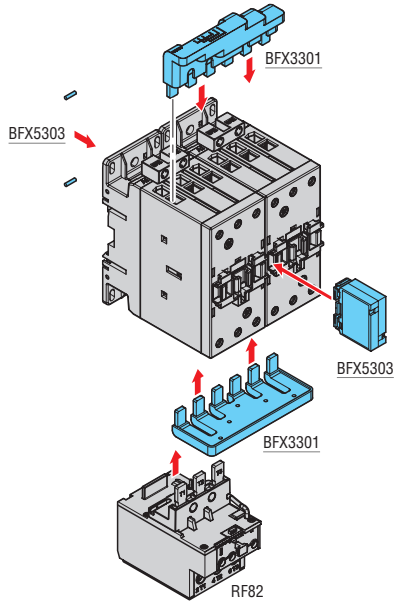


Rigid connecting kits for three-pole reversing contactor assembly. For BF95...BF150

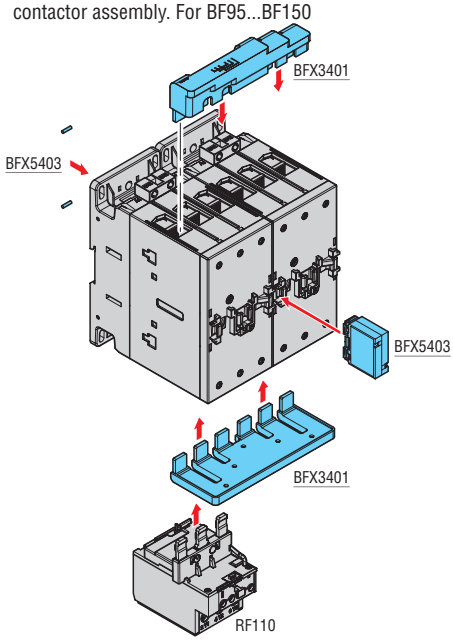


Rigid connecting kits for star-delta starters. For BF09...BF25 contactors

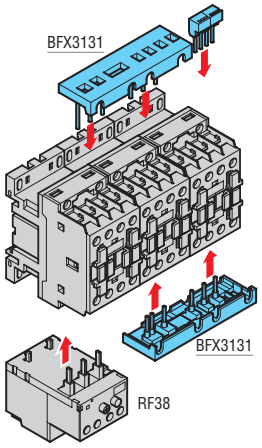


Rigid connecting kits for star-delta starters. For BF26...BF38 (line-delta) and BF09...BF25 (star) contactors

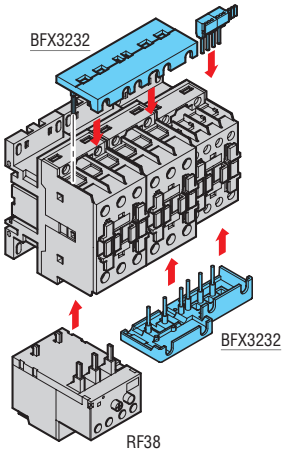

Rigid connecting kits for star-delta starters. For BF26...BF38 contactors

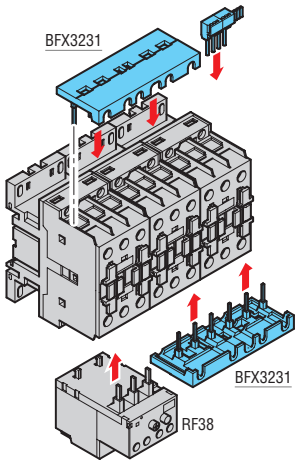


Rigid connecting kits for star-delta starters. For BF40...BF94 (line-delta) and BF26...BF38 (star) contactors

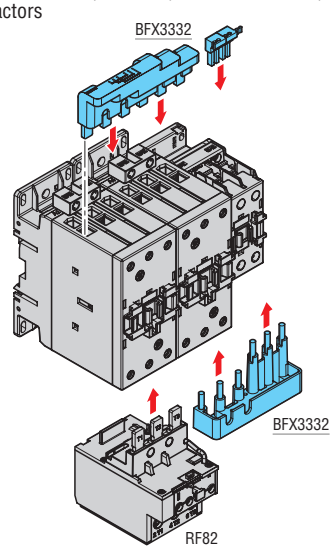


تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com


Rigid connecting kits for star-delta starters.
For BF40...BF94 contactors

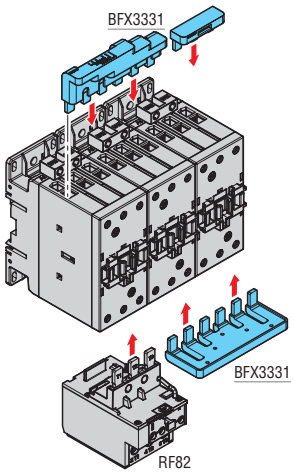


Rigid connecting kits for star-delta starters.
For BF95...BF150 (line-delta) and BF40...BF94 (star) contactors

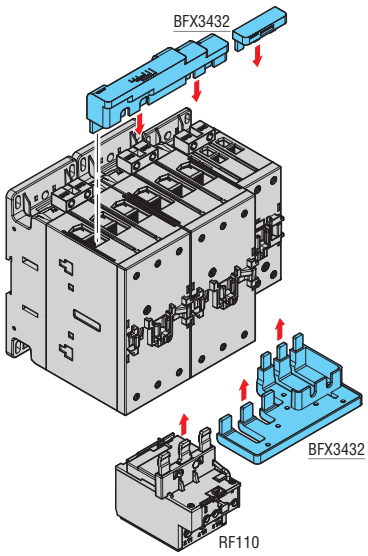


Rigid connecting kits for star-delta starters.
For BF95...BF150 contactors

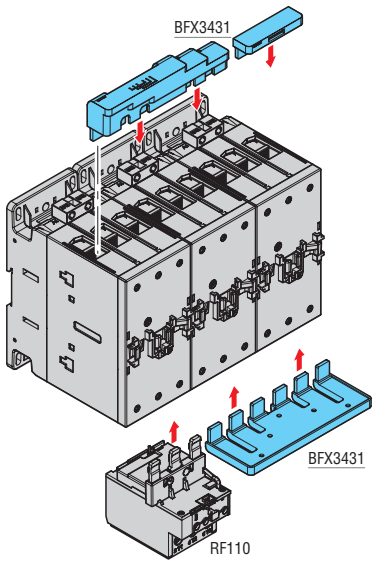


Rigid connecting kits for changeovers. For BF40... BF94 three-pole contactors




Rigid connecting kits for changeovers.
For BF95...BF150 three-pole contactors

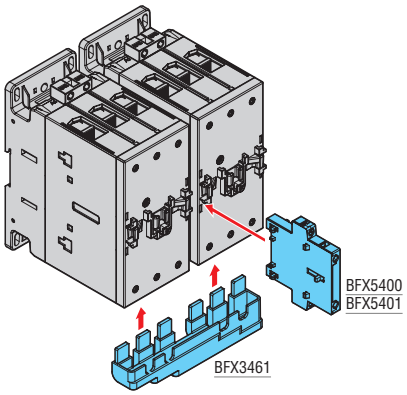

Rigid connecting kits for changeovers.
For BF40...BF94 four-pole contactors

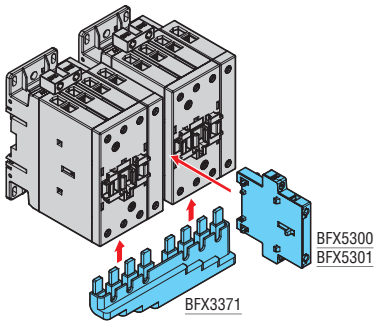

Rigid connecting kits for changeovers.
For BF95...BF150 four-pole contactors

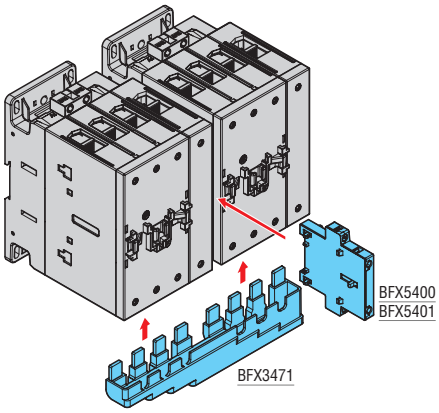

Contactors

Add-on blocks and accessories for contactors BF160...BF400


BFX10C01



BFX10C10



BFX12C...


BFX5500


BFX5503
BFX5504


BFX815
BFX816


BFX835
BFX836


BFX845
BFX846


BFX805
BFX806


GLX500
GLX501


GMX500


GMX501


BFX3583
BFX3683


BFX3584
BFX3684


BFX8508
BFX8608

Order Code	Characteristics	Max qty per cont.	Qty per pkg	Wt
		n°	n°	[kg]
Auxiliary contacts with front-mounting. Screw terminals.				
BFX10C10	1NO	6	10	0.048
BFX10C01	1NC	6	10	0.048
Auxiliary contacts with low side-mounting. Screw terminals.				
BFX12C02	2NC	2	5	0.048
BFX12C11	1NO + 1NC	2	5	0.048
BFX12C20	2NO	2	5	0.048
Mechanical interlock.				
BFX5500	For contactors BF160...BF400. Side by side mounting.	1	1	0.050
new **BFX5503**	For contactors BF160...BF400. One on top of other mounting. Interaxis 305...345mm	1	1	0.150
BFX5504	For contactors BF160...BF400. One on top of other mounting. Interaxis: 345...385mm	1	1	0.200

Order Code	Characteristics	Qty per pkg	Wt
		n°	[kg]
Power terminal protection. One-pole terminal cover.			
new **BFX815** ❶	For BF160...BF230	6	0.026
new **BFX816** ❶	For BF265...BF400	6	0.035
Three-pole terminal cover.			
new **BFX835**	For BF160...BF230	1	0.050
new **BFX836**	For BF265...BF400	1	0.075
Four-pole terminal cover			
new **BFX845**	For BF160T4...BF230T4	1	0.070
new **BFX846**	For BF265T4...BF400T4	1	0.098
Phase barrier.			
new **BFX805** ❸	For BF160...BF230	1	0.021
new **BFX806** ❹	For BF265...BF400	1	0.030
Terminal clamp sets for rigid and flexible cables.			
GLX500	1-piece set. For AWG 6....kcmil 250 wires.	1	0.011
GLX501	3-piece set. For AWG 6....kcmil 250 wires.	1	0.011
GMX500 ❷	6-piece set. For AWG 14...2/0 wires.	1	0.200
GMX501	6-piece set. For AWG 4....kcmil 300 wires.	1	0.200
Connections and captive nut accessory. Terminal enlargement.			
new **BFX3583**	For BF160...BF230 three-pole	1	0.100
new **BFX3683**	For BF265...BF400 three-pole	1	0.140
new **BFX3584**	For BF160...BF230 four-pole	1	0.130
new **BFX3684**	For BF265...BF400 four-pole	1	0.180
Paralleling link.			
new **BFX3592**	Two-pole paralleling for BF160...BF230	1	0.050
new **BFX3692**	Two-pole paralleling for BF265...BF400	1	0.070
new **BFX3593**	Three-pole paralleling for BF160...BF230	1	0.070
new **BFX3693**	Three-pole paralleling for BF265...BF400	1	0.098
Connecting kit for reversing contactor assembly.			
BFX3501	Per BF160...BF230	1	1.000
BFX3601	Per BF265...BF400	1	1.400
Connecting kits for star-delta starter.			
BFX3531	For BF160...BF230	1	1.100
BFX3631	For BF265...BF400	1	1.500
Rigid connecting kit for changeover.			
new **BFX3561**	For BF160...BF230 three-pole	1	0.900
new **BFX3661**	For BF265...BF400 three-pole	1	1.250
new **BFX3571**	For BF160...BF230 four-pole	1	1.200
new **BFX3671**	For BF265...BF400 four-pole	1	1.700
Captive nut.			
new **BFX8508**	For BF160...BF230. 8-piece set	1	0.052
new **BFX8608**	For BF265...BF400. 8-piece set	1	0.073

Operational characteristics for add-on auxiliary contacts

Type			BFX10C10 BFX10C01	BFX12
IEC conventional free air thermal current Ith		A	10	10
IEC rated insulation voltage Ui		V	690	690
Terminals	Screw		M3.5	M3
	Width	mm	7	7
Tightening torque		Nm	0.8...1	0.8...1
		lb.in	7...9	7...9
Conductor section maximum with (1 or 2 cables)				
	flexible w/o lug	mm^2	2.5	2.5
	flexible c/w lug	mm^2	2.5	2.5
	AWG	n°	14	14
Terminal protection per IEC/EN/BS 60529			IP20	IP20
IEC/EN/BS 60947-5-1 designation		AC	A600	A600
		DC	Q600	Q600
Mechanical life (million)		cycles	10	10

Certifications and compliance

Certifications obtained:

Type	cULus	EAC	CCC
BFX10C...	●	●	●
BFX12C...	●	●	●
BFX3...	●	–	–
BFX5...	●	–	–
BFX8...	●	–	–
GLX50...	●	–	–
GMX50...	●	–	–


Add-on auxiliary contacts are compliant with the following standards: IEC/EN/BS 60947-1, IEC/EN/BS 60947-5-1, UL 60947-1, UL 60947-5-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-5-1.
The add-on auxiliary contact blocks BFX10C... and BFX12C... comply with annex F of the IEC/EN/BS 60947-4-1 standard auxiliary contact linked with power contact" also known as mirror contact.
They also comply with Annex L of the IEC/EN/BS 60947-5-1 standard "mechanically linked contact elements".

❶ It is supplied for one terminal only. Example: for three-pole contactor, order 3 pieces for the upper terminals or 6 pieces for all the upper and lower terminals.
❷ For currents higher than 175A, 2 pieces can be mounted for each contactor terminal.
❸ Kit 4 pieces. For three-pole contactor order 1x BFX805; for four pole contactor order 2x BFX805.
❹ Kit 4 pieces. For three-pole contactor order 1x BFX806; for four pole contactor order 2x BFX806.

تسلاکالا 021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

Combinations: mounting position on BF160...230 and BF265...400.

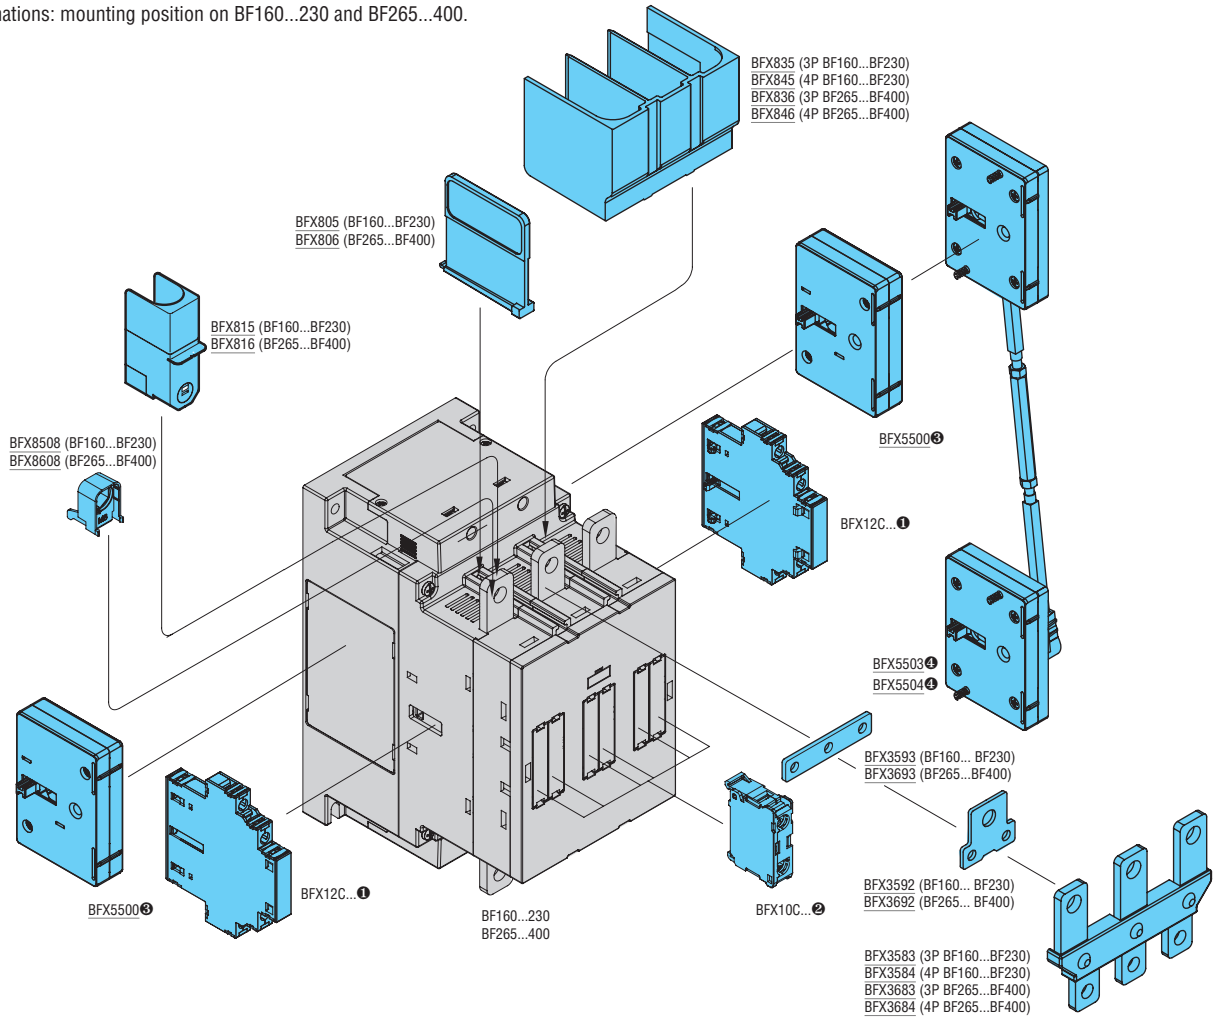

❶ Max 2 BFX12C... contact blocks per each contactor side.
❷ Max 6 BFX10C... contact blocks for three-pole contactors and 8 contact blocks for four-pole contactors.
❸ The BFX12C... contacts, in the presence of the BFX5500 mechanical interlock, can be mounted only on the opposite side of the contactor from that where the interlock is mounted.
❹ On the side of the contactor where the BFX5503 and BFX5504 vertical mechanical interlocks are mounted, the BFX12C... auxiliary contacts can also be mounted.

Add-on blocks



11G350 - 11G354



11G358

Order code	Characteristics	Max qty per. contactor	Qty per pkg	Wt
		n°	n°	[kg]
Auxiliary contacts. Faston terminals. Side mounting.				
11G350	2NO+1NC or 1NO+2NC reversible	4	1	0.082
11G354	1NO+1NC	4	1	0.078
Adapter.				
11G3587	For fitting auxiliary contacts BFX10..., with 2 contacts, G484..., G485..., G486... and G487 on contactors B500...B6301000	4	5	0.050
Mechanical interlock.				
11G35512	Side by side	1	1	0.026
11G35641,3	One on top of other	1	1	0.140
11G35651,3	One on top of other	1	1	0.146
11G35663,4	One on top of other	1	1	0.150
Mechanical latch.				
11G49556	For B500...B630	1	1	0.795

Accessories



11G527 - 11G528 - 11G529
11G530



11G370



11G371

Order code	Characteristics	Qty per pkg	Wt
		n°	[kg]
Power terminal protection.			
11G527	For contactor B500	1	0.238
11G528	For contactor B5004	1	0.265
11G529	For contactor B630	1	0.238
11G530	For contactor B6304	1	0.266
3 pole star connecting bars.			
11BA1846	For contactors B500-B630	1	0.34
2 pole bars for parallel arrangement.			
11BA1845	For contactors B500-B630	1	0.322
Terminal adapter.			
11G370	To transform Faston terminals of auxiliary contacts and coils into screw terminals	10	0.003
11G371	To transform both coil Faston terminals into screw terminals	5	0.022

1 Not suitable for B6301000-B1250-B1600 4.
2 For use with three-pole B6301000, consult Technical support for information; see contact details on inside front cover.
3 Allowed distances see page 2-76.
4 For contactors B1250 and B1600, two G3566 mechanical interlocks are required.
5 Replace with the digit of the voltages if 50 or 60 Hz or with the letter C followed by voltage if DC. The standard voltages are:
– AC 50/60Hz 48 - 110...125 (indicate 110) - 220...240 (indicate 220) - 380...415 (indicate 380)
– DC 48 - 110...125 (indicate 110) - 220...240 (indicate 220).
6 It can be mounted only in contactors if predisposed for it. Technical support for information; see contact details on inside front cover.
7 For use with mechanical interlock see page 2-79.

Operational characteristics of auxiliary contacts

Type			G350-G354
IEC conventional free-air thermal current Ith		A	16
IEC rated insulation voltage Ui		V	690
Terminals	Faston		1-6.35x0.8 2-2.8x0.8
Conductor section maximum (with 1 or 2 cables)	flexible c/w lug	mm²	2.5
	AWG	n°	14
UL/CSA and IEC/EN/BS 60947-5-1 designation		AC	A600
		DC	P600
Mechanical life (million)		cycles	5

Type			G4957
Rated AC control circuit voltage	AC (50/60Hz)	V	48...480
	DC	V	48...480
Power consumption with control in:	AC	VA	1500
	DC	W	1100
Minimum energising:	drop-out	ms	40
	pick-up	ms	300
Terminals	Faston		1-6.3x0.8
Mechanical life (million)		cycles	0.1

Type		G370-G371
Tightening torque	Nm	1
	lb.in	8.9
Tool	Type	PH2
Conductor section (with 1 or 2 cables)	mm²	4
	AWG	10

Certifications and compliance
Certifications obtained:

Type	UL	CSA	EAC	CCC
G350	●	●	●	●
G354	●	●	●	—
G355	—	●	●	—
G356 ...	—	●	●	—
G361	—	●	●	—
G362	—	●	●	—
G363	—	●	●	—
G370	—	●	●	—

● Certified products.


UL - UL Recognized for USA only (File E93601) as Auxiliary Devices - Component.
Products having this type of marking are intended for use as components of complete workshop-assembled equipment.
CSA - CSA certified for Canada only (File 54332) as Auxiliary Devices for motor controllers.

Compliant with standards: IEC/EN/BS 60947-1, IEC/EN/BS 60947-4-1, UL 60947-1, UL 60947-4-1, IEC/EN/BS 60947-4-1, UL508, CSA C22.2 n° 14; add-on auxiliary contacts also comply with: IEC/EN/BS 60947-5-1, UL 60947-5-1, CSA C22.2 n° 60947-5-1.
The add-on auxiliary contact blocks 11G350 and 11G354 comply with annex F of the IEC/EN/BS 60947-4-1 standard "auxiliary contact linked with power contact" also known as mirror contact.


تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com


Combinations: Mounting position on B500...B630 contactors

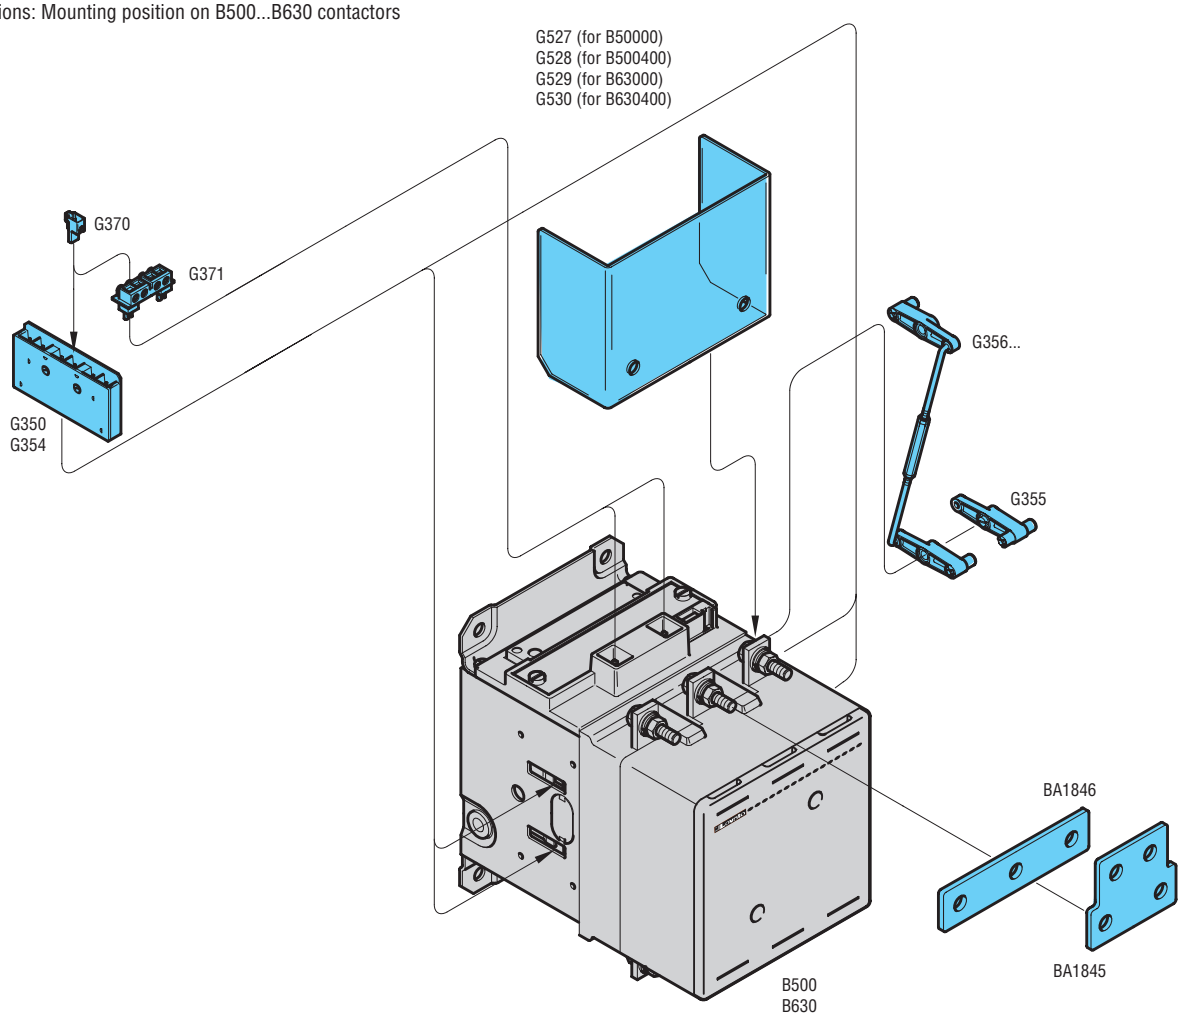

The add-on auxiliary contact blocks G350 and G354 can be applied to contactors B500-B6301000 only up to a maximum of four pieces for each contactor, for a total of 12 contacts.
The contact block G350 provides a 2NO+1NC or 1NO+2NC combination depending on its mounting position; see the drawing below. The G354 block consists of 1NO+1NC.

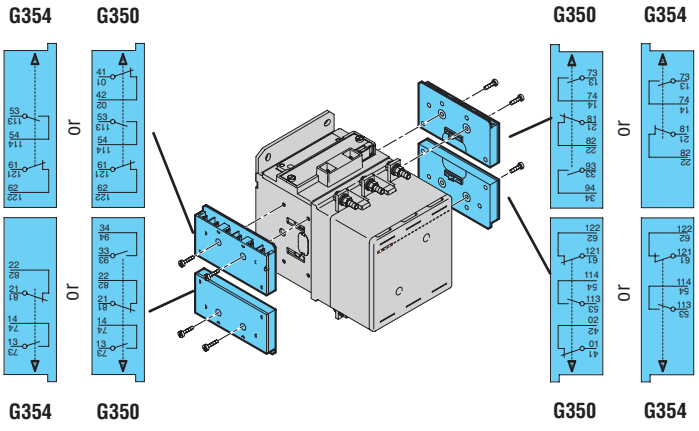

Contact blocks, BFX10 with 2 contacts, G484, G485, G486 and G487 types, can be mounted using the G358 adapter, refer to page 2-22 for exact types and order codes of the blocks. A maximum of four adapters can be possibly used per contactor and each adapter can hold one BFX10, G484, G485, G486 and G487.

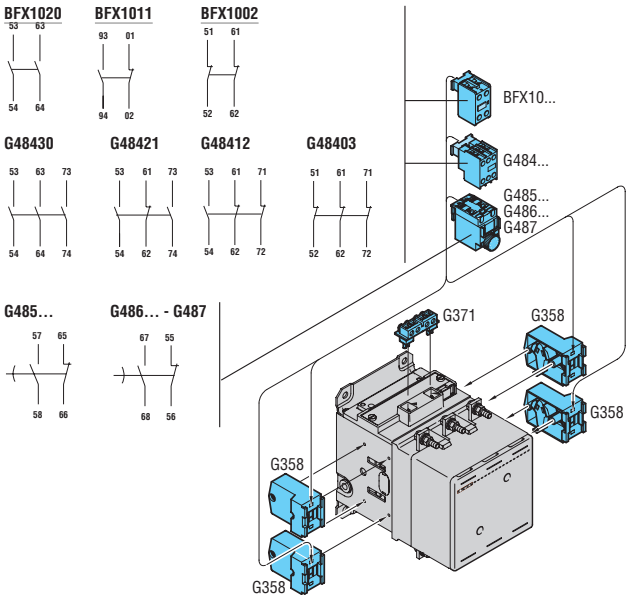


AC coils




BFX91A...



BFX92A...

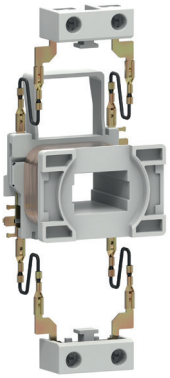

BFX93A...

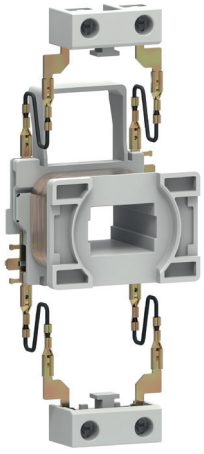

BFX94A...

Order code	Rated frequency and voltage		Qty per pkg	Wt
	[Hz]	[V]	n°	[kg]
For contactors BF00A-BF09A-BF12A-BF18A-BF25A.				
BFX91A024❶	50/60	24VAC	1	0.085
BFX91A048❶		48VAC	1	0.085
BFX91A110❶		110VAC	1	0.085
BFX91A230❶		230VAC	1	0.085
BFX91A400❶		400VAC	1	0.085
BFX91A02460❶	60	24VAC	1	0.085
BFX91A04860❶		48VAC	1	0.085
BFX91A12060❶		120VAC	1	0.085
BFX91A22060❶		220VAC	1	0.085
BFX91A23060❶		230VAC	1	0.085
BFX91A46060❶		460VAC	1	0.085
BFX91A57560❶		575VAC	1	0.085
For contactors BF26A-BF32A-BF38A.				
BFX92A024❶	50/60	24VAC	1	0.088
BFX92A048❶		48VAC	1	0.088
BFX92A110❶		110VAC	1	0.088
BFX92A230❶		230VAC	1	0.088
BFX92A400❶		400VAC	1	0.088
BFX92A02460❶	60	24VAC	1	0.088
BFX92A04860❶		48VAC	1	0.088
BFX92A12060❶		120VAC	1	0.088
BFX92A22060❶		220VAC	1	0.088
BFX92A23060❶		230VAC	1	0.088
BFX92A46060❶		460VAC	1	0.088
BFX92A57560❶		575VAC	1	0.088
For contactors BF40A-BF50A-BF65A-BF80A-BF94A-BFD65A-BFD80A.				
BFX93A024❶	50/60	24VAC	1	0.150
BFX93A048❶		48VAC	1	0.150
BFX93A110❶		110VAC	1	0.150
BFX93A230❶		230VAC	1	0.150
BFX93A400❶		400VAC	1	0.150
BFX93A02460❶	60	24VAC	1	0.150
BFX93A04860❶		48VAC	1	0.150
BFX93A12060❶		120VAC	1	0.150
BFX93A22060❶		220VAC	1	0.150
BFX93A23060❶		230VAC	1	0.150
BFX93A46060❶		460VAC	1	0.150
BFX93A57560❶		575VAC	1	0.150
For contactors BF95A-BF115A-BF150A.				
BFX94A024❶	50/60	24VAC	1	0.185
BFX94A048❶		48VAC	1	0.185
BFX94A110❶		110VAC	1	0.185
BFX94A230❶		230VAC	1	0.185
BFX94A400❶		400VAC	1	0.185
BFX94A02460❶	60	24VAC	1	0.185
BFX94A04860❶		48VAC	1	0.185
BFX94A12060❶		120VAC	1	0.185
BFX94A22060❶		220VAC	1	0.185
BFX94A23060❶		230VAC	1	0.185
BFX94A46060❶		460VAC	1	0.185
BFX94A57560❶		575VAC	1	0.185

❶ Four-terminal coil.

Operational characteristics for BFX91A, BFX92A, BFX93A and BFX94A coils

AC control

Rated voltage at 50/60, 60Hz			V	12...600		
Operating voltage limits						
50/60Hz coil powered at 50Hz	50Hz	pick-up	% Us	80...110		
		drop-out	% Us	20...55		
	60Hz	pick-up	% Us	85...110		
		drop-out	% Us	20...55		
60Hz coil powered at 60Hz		pick-up	% Us	80...110		
		drop-out	% Us	20...55		
Average coil consumption at ≤20°C				BFX91 BFX92	BFX93	BFX94
50/60Hz coil powered at 50Hz	50Hz	in-rush	VA	75	210	300
		holding	VA	9	15	20
	60Hz	in-rush	VA	70	195	275
		holding	VA	6.5	13	17
60Hz coil powered at 60Hz		in-rush	VA	75	210	300
		holding	VA	9	15	20
Dissipation	at 50Hz		W	2.5	5	6.5

Materials

Class F enamelled copper wire.


Special versions

For coils with non standard voltages, consult Technical support for information; see contact details on inside front cover


تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com


AC/DC and DC coils

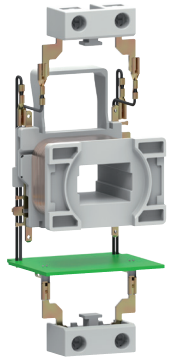


BFX93E...

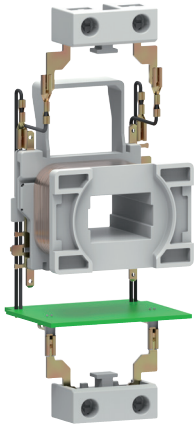

BFX94E...

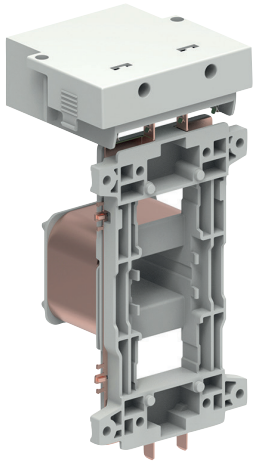

BFX95E...

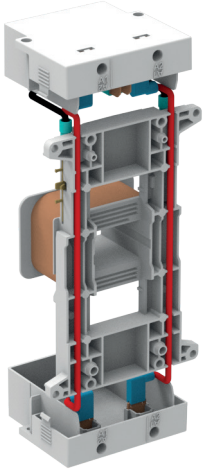

BFX96E...

Order code	Rated	Qty per pkg	Wt
	[V]	n°	[kg]
For contactors BF40E-BF50E-BF65E-BF80E-BF94E-BFD80E❶.			
BFX93E024❷	20...48V AC/DC	1	0.190
BFX93E110❷	60...110V AC/DC	1	0.190
BFX93E230❷	100...250V AC/DC	1	0.190
For contactors BF95E-BF115E-BF150E-BFD150E.			
BFX94E024❷	20...48V AC/DC	1	0.225
BFX94E110❷	60...110V AC/DC	1	0.225
BFX94E230❷	100...250V AC/DC	1	0.225
For contactors BF160E-BF195E-BF230E.			
BFX95E024	24...60VAC / 20...60VDC	1	0.400
BFX95E110	60...130VAC/DC	1	0.400
BFX95E230	100...250VAC/DC	1	0.400
BFX95E400	250...500VAC/DC	1	0.400
For contactors BF265E-BF330E-BF400E.			
BFX96E024	24...60VAC / 20...60VDC	1	0.560
BFX96E110	60...130VAC/DC	1	0.560
BFX96E230	100...250VAC/DC	1	0.560
BFX96E400	250...500VAC/DC	1	0.560

new

NOTE: no coil replacement for contactors BF00 D, BF09D-BF38D, BF00L, BF09L-BF38L is possible.

❶ For BF80T2E... contactors the coil supply voltage must be AC or smoothed DC. For pulsating DC please consult our Technical support.
❷ Four-terminal coil.

Operational characteristics for BFX93E coil
AC/DC control

Rated voltage		V	20...250
Operating voltage limits: 50/60 Hz coil powered at or in DC	pick-up	% Us	80...110❶
	drop-out	% Us	≤70% Us min
Average coil cons. at ≤20°C	in-rush	W	45...75
	holding	W	1.2...2.1

Operational characteristics for BFX94E... coil
AC/DC control

Rated voltage		V	20...250
Operating voltage limits: 50/60 Hz coil powered at or in DC	pick-up	% Us	80...110❶
	drop-out	% Us	≤70% Us min
Average coil cons. at ≤20°C	in-rush	W	65...110
	holding	W	1.8...3

Operational characteristics for BFX95E... coil
AC/DC control

Rated voltage		V	20...250
Operating voltage limits: 50/60 Hz coil powered at or in DC	pick-up	% Us	80...110❶
	drop-out	% Us	≤70% Us min
Average coil cons. at ≤20°C	in-rush	W	160...230
	holding	W	1.5...3

Operational characteristics for BFX96E... coil
AC/DC control

Rated voltage		V	20...250
Operating voltage limits: 50/60 Hz coil powered at or in DC	pick-up	% Us	80...110❶
	drop-out	% Us	≤70% Us min
Average coil cons. at ≤20°C	in-rush	W	160...320
	holding	W	3.5...8

❶ 80% of Us min. and 110% of Us max.

Materials
Class F enamelled copper wire.

Special versions
For coils with non standard voltages, consult Technical support for information; see contact details on inside front cover.

AC/DC coils



Coil




Bridge rectifier




Coil protection



Coil assembly

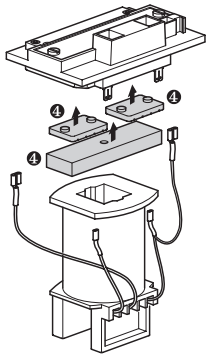



Order code	Rated voltage AC 50/60Hz and DC	Qty per pkg	Wt
	[V]	n°	[kg]
Coil for B500-B630-B6301000 contactors.			
11BA180048	48VAC/DC	1	3.400
11BA180060	60VAC/DC	1	3.400
11BA1800110	110...125VAC/DC	1	3.400
11BA1800220	220...240VAC/DC	1	3.400
11BA1800380	380...415VAC/DC	1	3.400
11BA1800440	440...480VAC/DC	1	3.400
Coil for B1250-B1600 contactors.			
11BA1800110❶	110...125VAC❶	1	3.400
11BA1800220❶	220...240VAC❶	1	3.400

Order code	For contactor	Qty per pkg	Wt
		n°	[kg]
Bridge rectifier (Faston terminals).			
11BA1799❸	B500-B630-B6301000 B1250-B1600	1	0.520
Coil protection.			
11BA1803	B500-B630-B6301000 B1250-B1600	1	0.164
Coil assembly (Coil, rectifier and coil protection).			
11BA1796❷	B500-B630-B6301000 B1250-B1600	1	4.650

❶ Available for AC supply only.
❷ Add the coil voltage digit. Standard voltages are:
- AC/DC 48 - 60 - 110...125 - 220...240 - 380...415 - 440...480V.

Example: 11BA1671110 (coil assembly powered at 110VAC/DC complete with power supply and coil protection for B500...B1600 contactors).

For B1250 and B1600 only voltages 110...125 and 220...240VAC are available.
❸ For contactors with coil voltage up to 415V. For higher voltages add suffix 440 to the code. E.G.: 11BA1796440.

Operational characteristics

For contactor type			B500 - B630 - B6301000
Supply voltage			AC and DC
Rated control voltage		V	48...480
Operating limits	pick-up	% Us	80...110
	drop-out	% Us	20...60
Consumption	in-rush	VA/W	400
	holding	VA/W	18
Dissipation		W	18

For contactor type			B1250 - B1600
Supply voltage			AC
Rated control voltage		V	110/240
Operating limits	pick-up	% Us	80...110
	drop-out	% Us	20...60
Consumption	in-rush	VA/W	800
	holding	VA/W	45
Dissipation		W	40

Materials
Class F enamelled copper wire.

Coil assembly
Comprises the coil, bridge rectifier, fixed core, coil protection, cross piece and fixing screws.

Special versions
For coils with non standard voltages, consult Technical support for information; see contact details on inside front cover.

تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com


Main contacts for BF and B contactors



BFX99095T

Order code	For contactor	Qty per pkg	Wt
		n°	[kg]
Main contacts. 3 or 4 pole set complete with Allen screws and key for contact replacement.			
BFX99026T	BF2600	1	0.038
BFX99026F	BF26T4	1	0.051
BFX99032T	BF3200	1	0.070
BFX99038T	BF3800	1	0.070
BFX99038F	BF38T4	1	0.093
BFX99040T	BF4000	1	0.095
BFX99040F	BF40T4	1	0.127
BFX99050T	BF5000	1	0.095
BFX99050F	BF50T4	1	0.127
BFX99065T	BF6500	1	0.095
BFX99065F	BF65T4	1	0.127
BFX99080T	BF8000	1	0.100
BFX99080F	BF80T4	1	0.130
BFX99094T	BF9400	1	0.100
BFX99095T	BF9500	1	0.210
BFX99095F	BF95T4	1	0.280
BFX99115T	BF11500	1	0.225
BFX99115F	BF115T4	1	0.300
BFX99150T	BF15000	1	0.225
BFX99150F	BF150T4	1	0.300
BFX99160T	BF16000	1	0.350
BFX99160F	BF160T4	1	0.450
BFX99195T	BF19500	1	0.350
BFX99195F	BF195T4	1	0.450
BFX99230T	BF23000	1	0.350
BFX99230F	BF230T4	1	0.450
BFX99265T	BF26500	1	0.490
BFX99265F	BF265T4	1	0.630
BFX99330T	BF33000	1	0.490
BFX99330F	BF330T4	1	0.630
BFX99400T	BF40000	1	0.490
BFX99400F	BF400T4	1	0.630
11G525	B500	1	2.520
11G5254	B5004	1	3.360
11G526	B630	1	2.660
11G5264	B6304	1	3.550
11G537	B6301000	1	2.660
11G5374	B63010004	1	3.550
11G538	B125024	1	5.040
11G5384	B1250424	1	6.720
11G539	B160024	1	5.320
11G5394	B1600424	1	7.100

new



11G525... - 11G526... - 11G537...

Special versions
For non standard spare contact configurations, contact Technical support; see contact details on inside front cover.

NOTE: For B1250 and B1600 contactor spares, consult Technical support for information; see contact details on inside front cover.

Arc chutes for BF and B contactors




Arc chute 11BA1838

Order code	For contactor	Qty per pkg	Wt
		n°	[kg]
Arc chutes.			
BFX9805T	BF16000-BF19500-BF23000	1	1.000
BFX9805F	BF160T4-BF195T4-BF230T4	1	1.200
BFX9806T	BF26500-BF33000-BF40000	1	1.400
BFX9806F	BF265T4-BF330T4-BF400T4	1	1.680
11BA1838	B500-B630-B6301000	1	1.910
11BA1839	B5004-B6304-B63010004	1	2.490


new

BG... MINI-CONTACTORS WITH AC OR DC SUPPLY VOLTAGE


BG... three-poles with screw terminals
and **RF...9** thermal overload relay

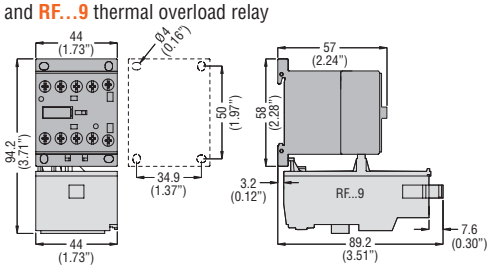


BG...T...
four-poles, with screw terminals

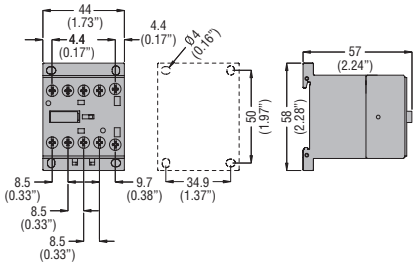

BGP...
with rear PCB solder pins

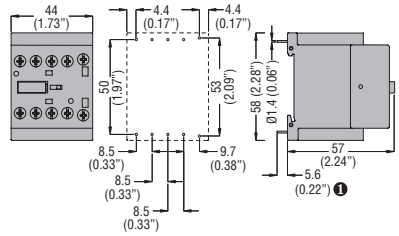


BGF...
with Faston terminals

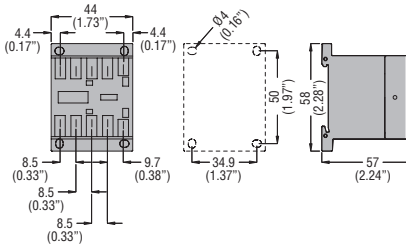

❶ Recommended PCB drillings 1.7-2mm.


BF... CONTACTORS WITH AC SUPPLY VOLTAGE

BF00A... BF09 A... - BF12A... - BF18A... - BF25A... three-poles with
RF...38 thermal overload relay

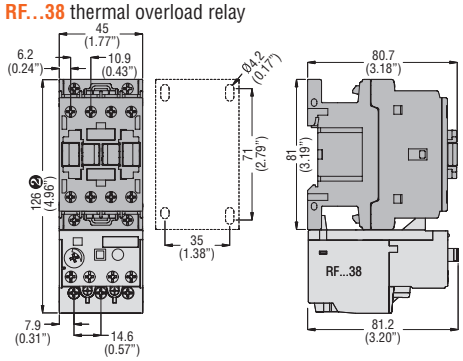


❷ 135mm/5.31" for RFE45

BF09T...A... - BF12T...A... - BF18T...A... four-poles

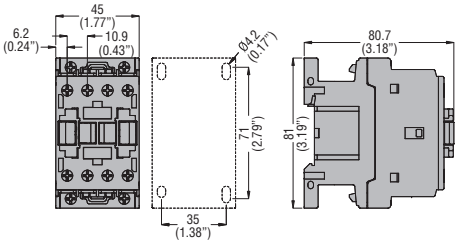


BF2600A... - BF3200A... - BF3800A... three-poles with **RF...38** thermal overload relay

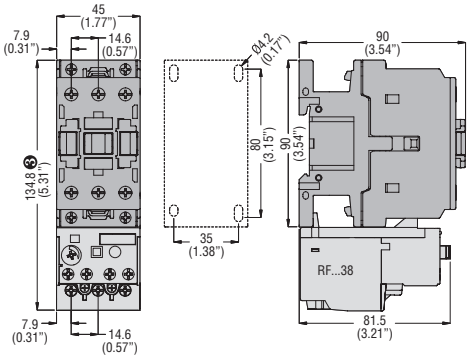


❸ 144mm/5.67" for RFE45


BF26T...A... - BF38T...A... four-poles

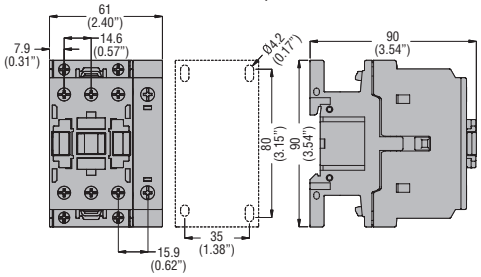

BF4000A... - BF5000A... - BF6500A... - BF8000A... - BF9400A...
three-poles with **RF82** thermal overload relay

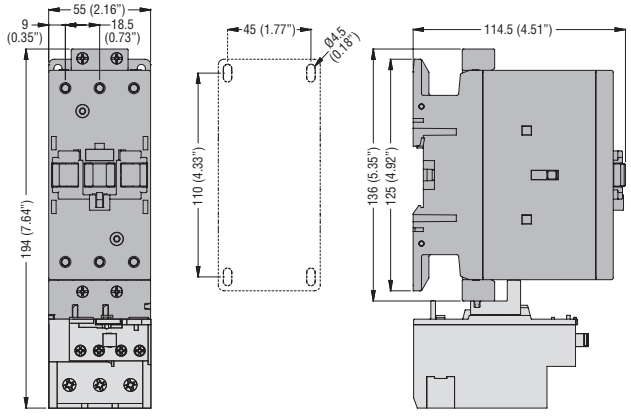

BF40T4...A... - BF50T4...A... - BF65T4...A... -
BF80T4...A... - BFD80T4... - BF80T2A... four-poles

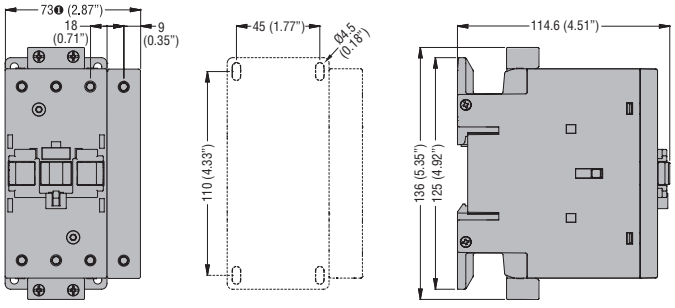


❶ BF80T2 91mm/3.58", BFD6500... - BFD8000... 55mm/2.16"


تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

BF9500A... - BF11500A... - BF15000A... three-poles with **RF110** thermal relay

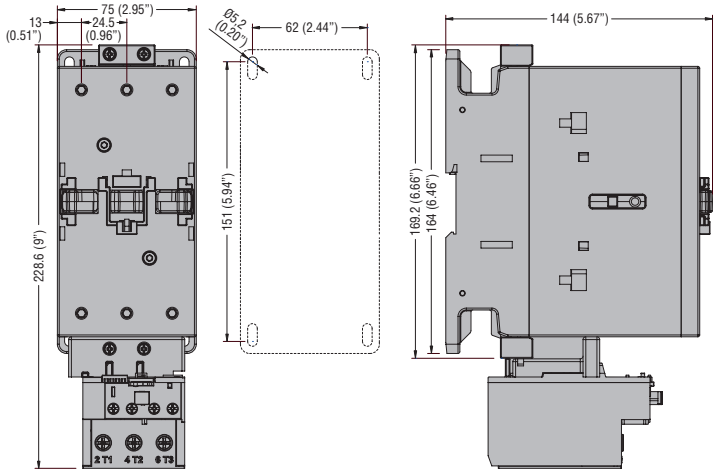


BF95T4A... - BF115T4A... - BF150T4A... four-poles

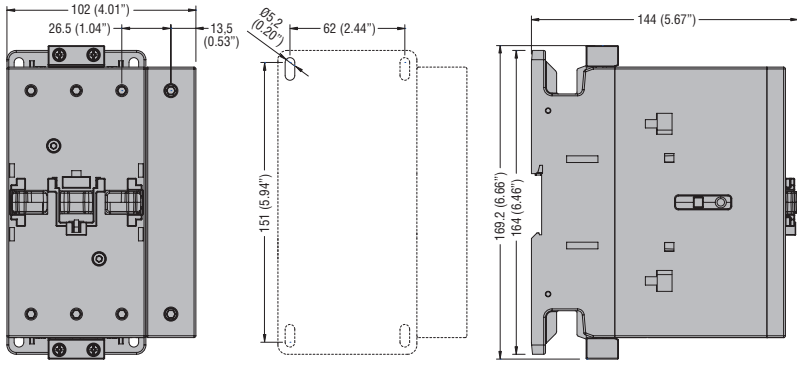


BF...CONTACTORS WITH DC SUPPLY VOLTAGE

BF00...D and **BF00...L - BF09... - BF12... - BF18... - BF25...D** and **L**
three-poles with **RF...38** thermal overload relay

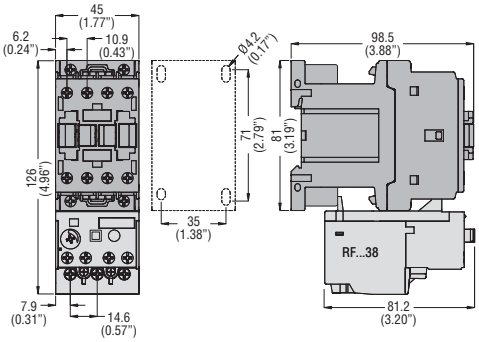


Control relays


BF00...D and **BF00...L**
BF09T... - BF18T... D and **L** four-poles

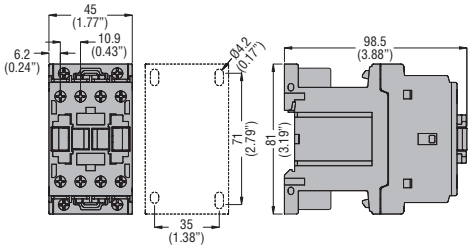


BF26... - BF32... - BF38...D and **L** three-poles with **RF...38** thermal overload relay

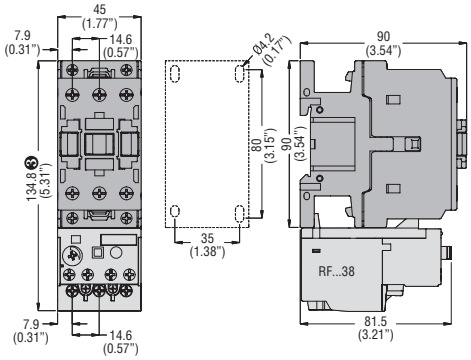


BF26T... - BF38 T...D and **L** four-poles

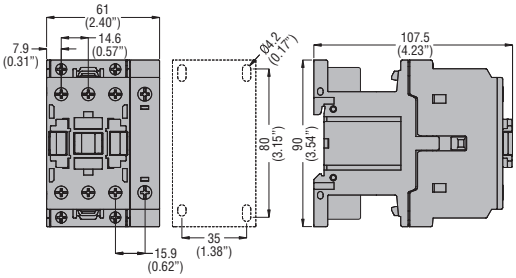

BF4000E... - BF5000E... - BF6500E... - BF8000E... - BF9400E...
three-poles with **RF82** thermal overload relay

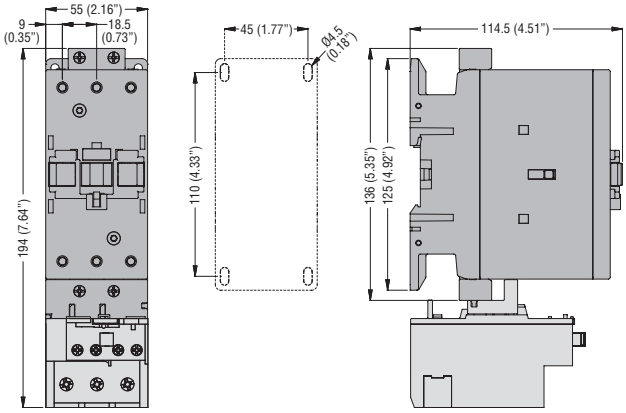


BF65T4E... - BF80T4E... - BF80T2E... four-poles

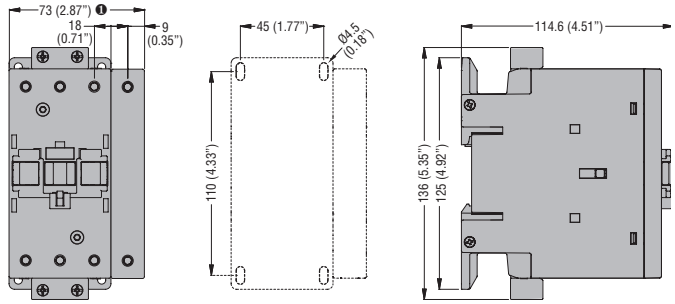


❶ BF80T2 91mm (3.58")

BF9500E... - BF11500E... - BF15000E... three-poles with RF110 thermal relay

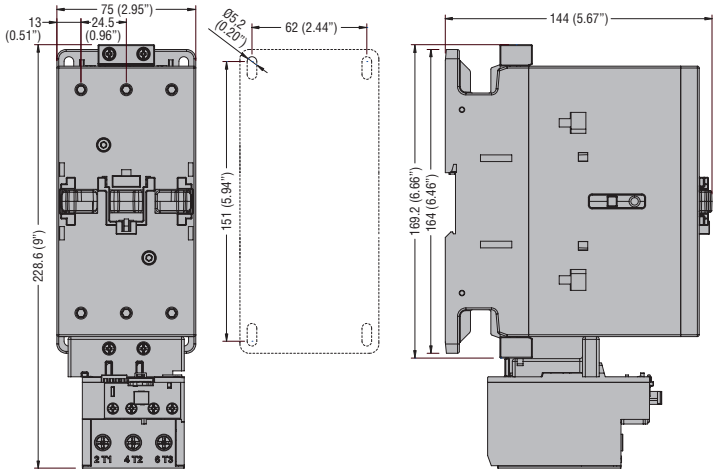

BF95T4E... - BF115T4E... - BF150T4E... - BFD150T4E... four-poles

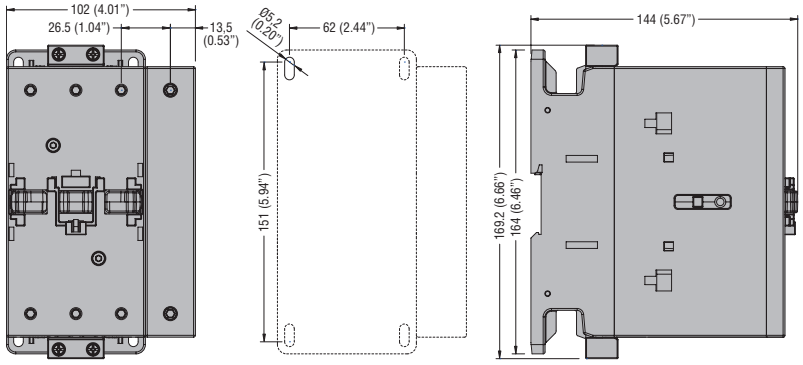


تسلاکالا
021-9102 6126 | teslakala.com


تسلاکالا
021-9102 6126 | teslakala.com

BF...CONTACTORS WITH AC/DC SUPPLY VOLTAGE


BF16000E... - BF19500E... - BF23000E... three-poles

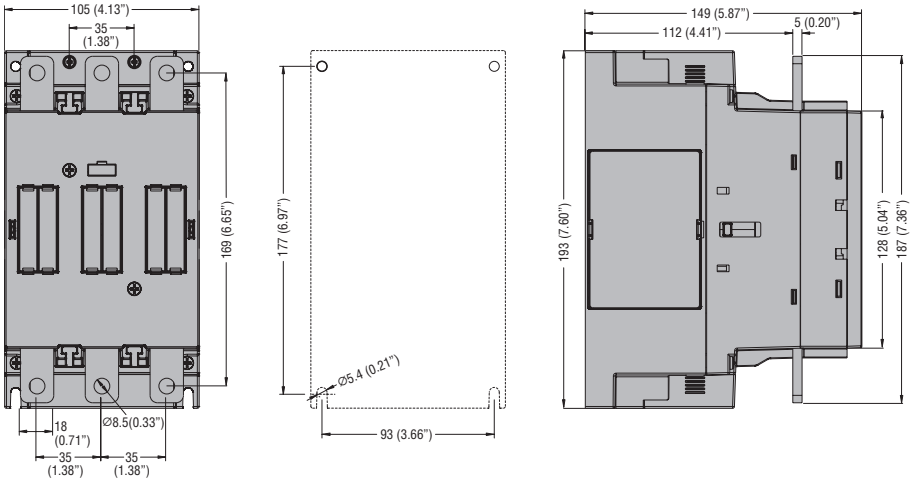


BF160T4E... - BF195T4E... - BF230T4E... four-poles

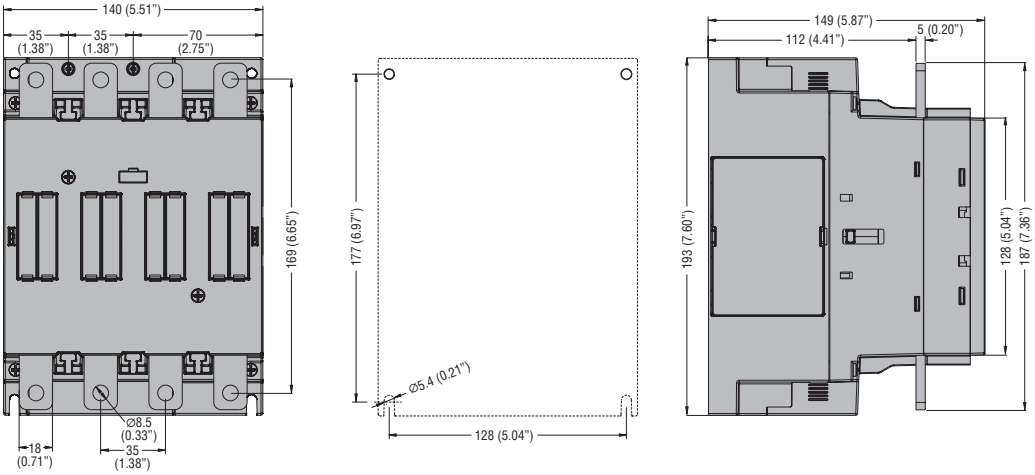

BF265... - BF330... - BF400... three-poles

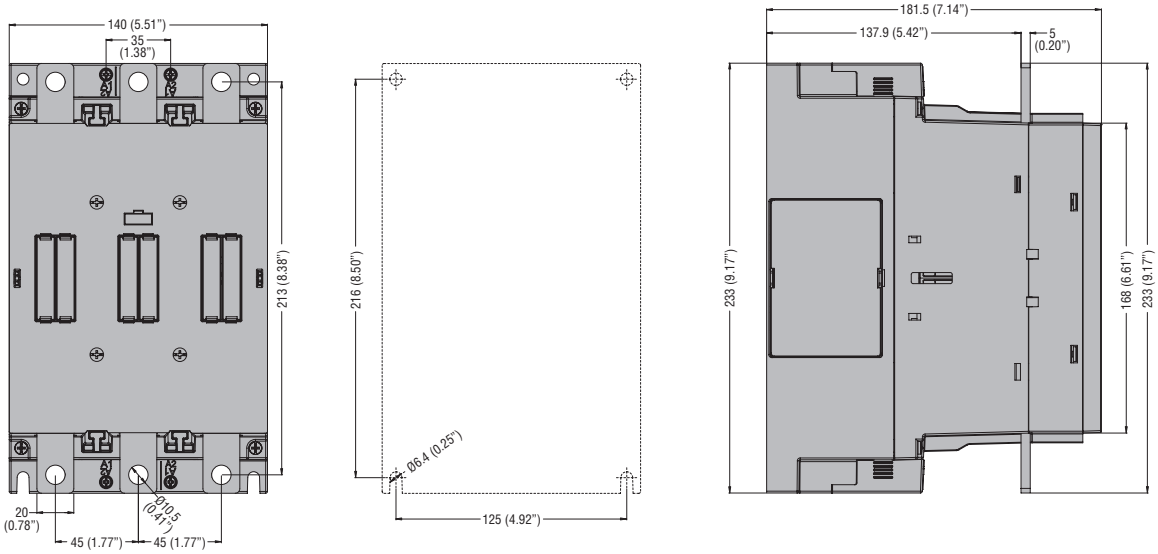


BF265T4E... - BF330T4E... - BF400T4E... four-poles

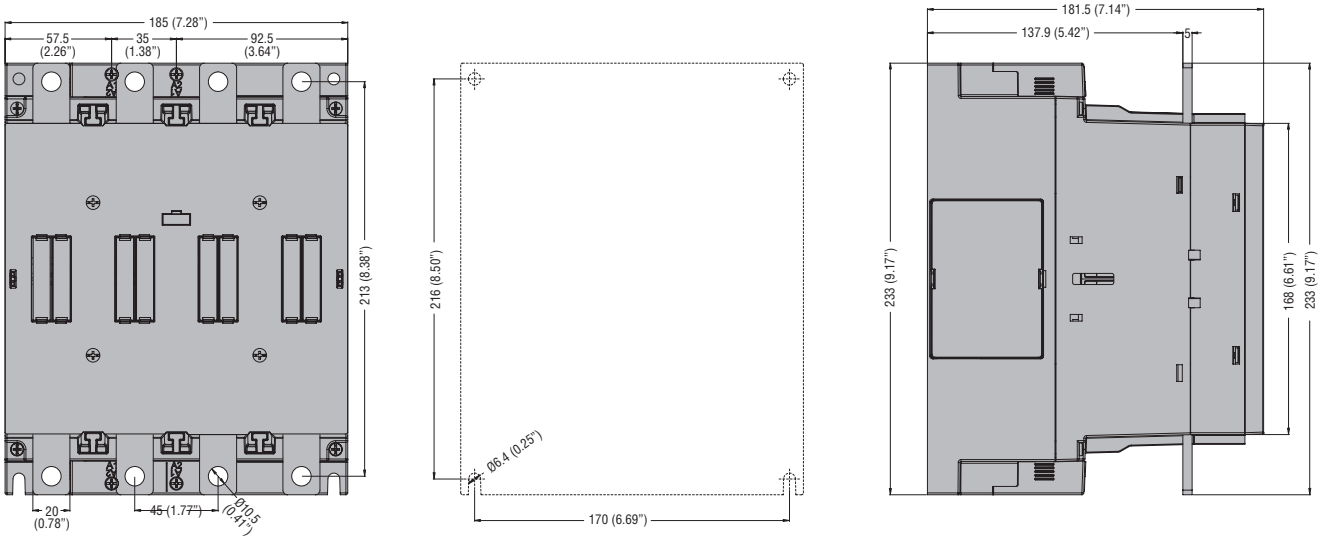

تسلاکالا
021-9102 6126 | teslakala.com


تسلاکالا
021-9102 6126 | teslakala.com

B500... - B630... three-poles

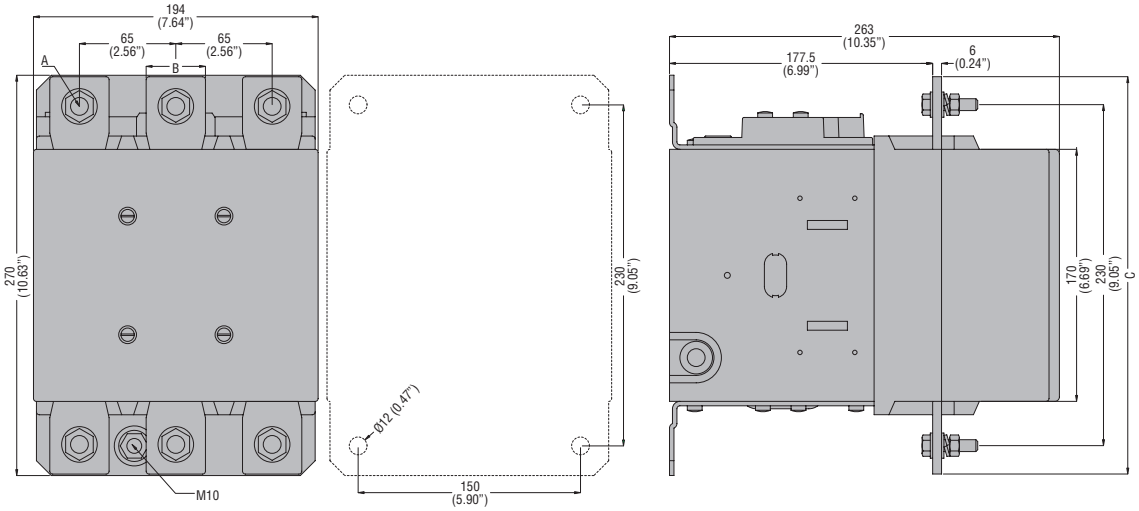


CONTACTOR TYPE	A	B	C
B500	M10	35 (1.38")	265 (10.43")
B630	M12	40 (1.57")	270 (10.63")

B5004... - B6304... four-poles

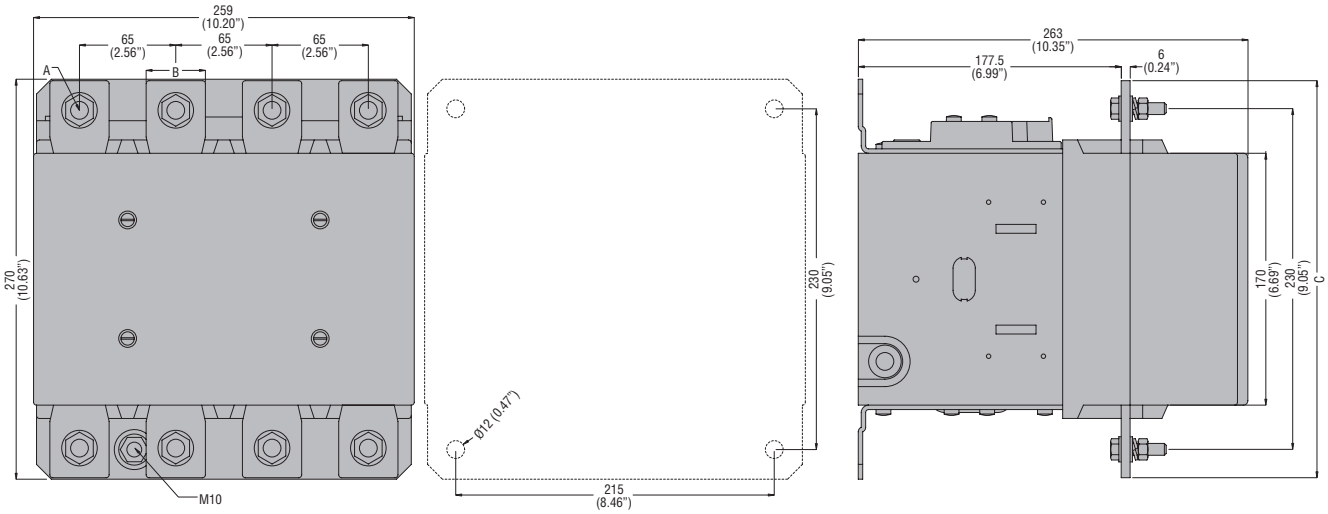


CONTACTOR TYPE	A	B	C
B5004	M10	35 (1.38")	265 (10.43")
B6304	M12	40 (1.57")	270 (10.63")

B6301000... three-poles

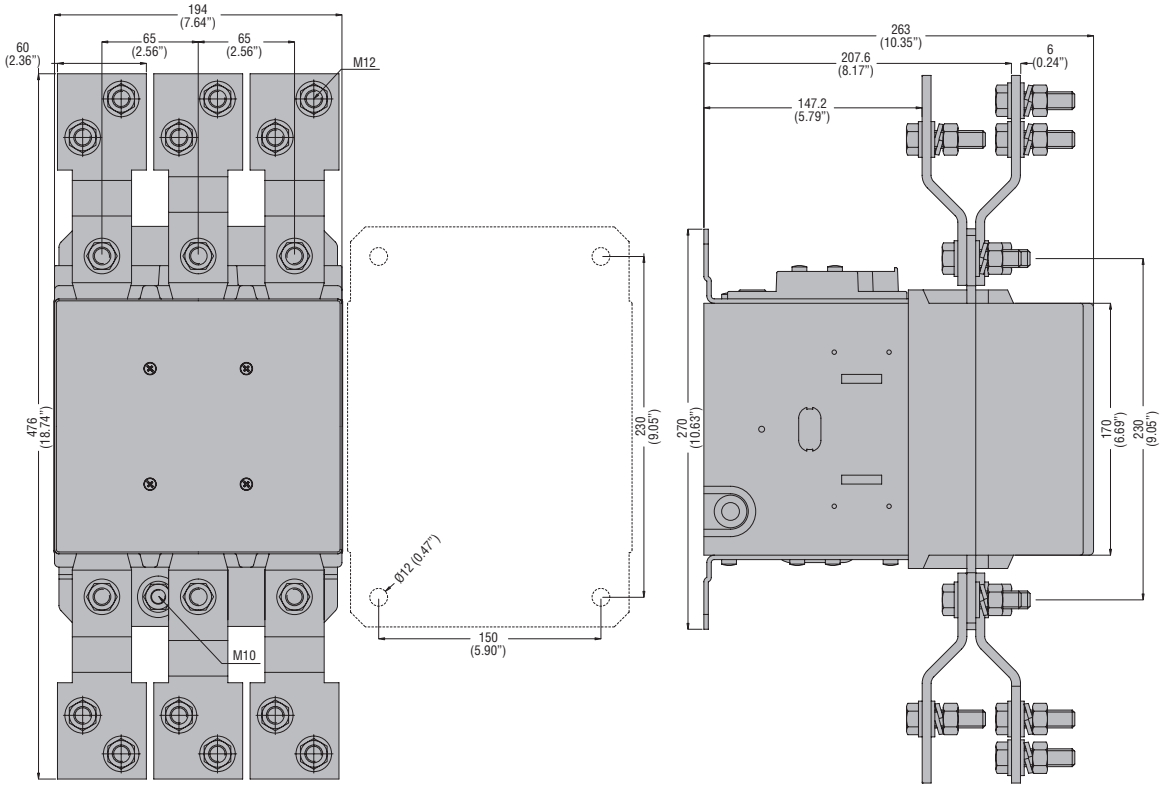


B63010004... four-poles

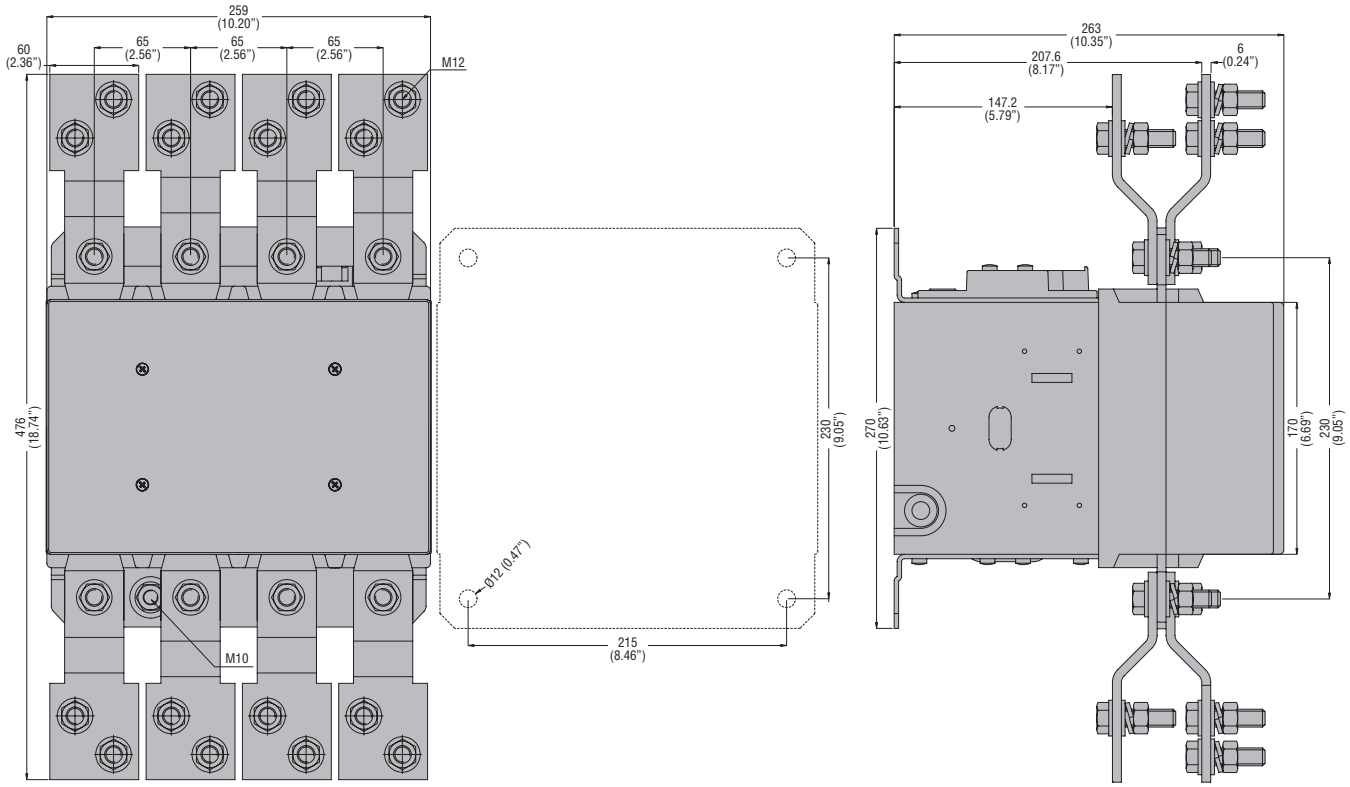


تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com


B1250… - B1600… three-poles

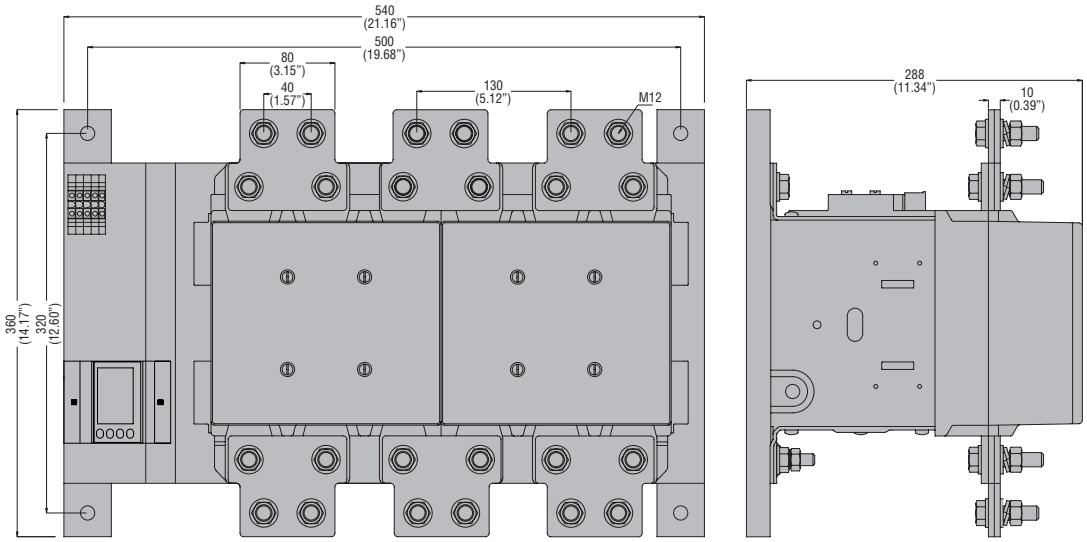


B12504… - B16004… four-poles

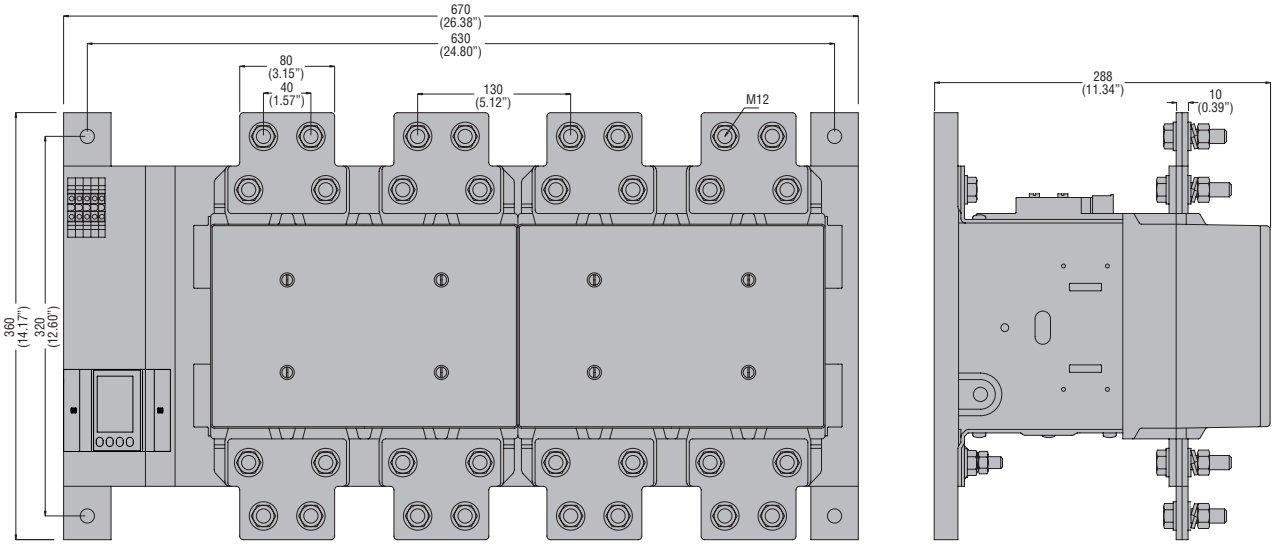

B500… - B630… - B6301000… - B1250… - B1600…



Minimum safety distance from metal parts.

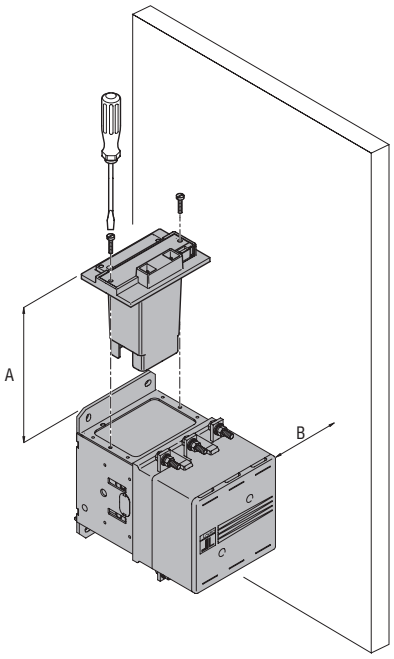


Minimum space needed to replace the coil.

	B500…B6301000
A	170 (6.69")
B	160 (6.30")


If dimension B is respected, coil replacement is possible without removing power wiring.

CONTACTORS FOR POWER FACTOR CORRECTION


BFK0910A - BFK1210A - BFK1810A

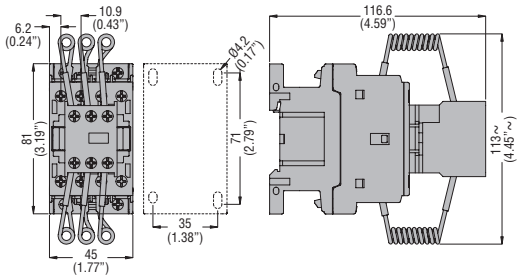


BFK2600A - BFK3200A - BFK3800A

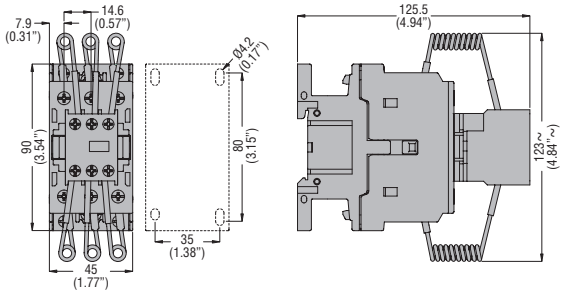

BFK50 - BFK65 - BFK80 - BFK94

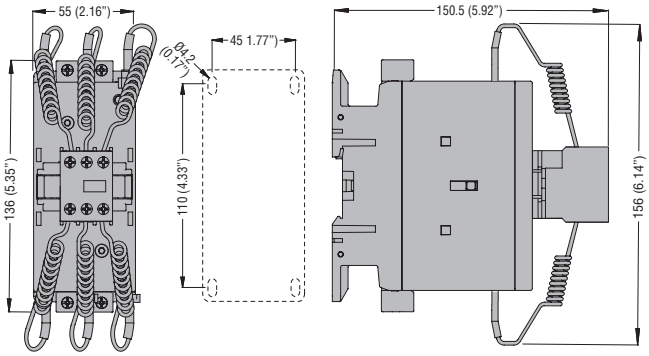


BFK95 - BFK115 - BFK150

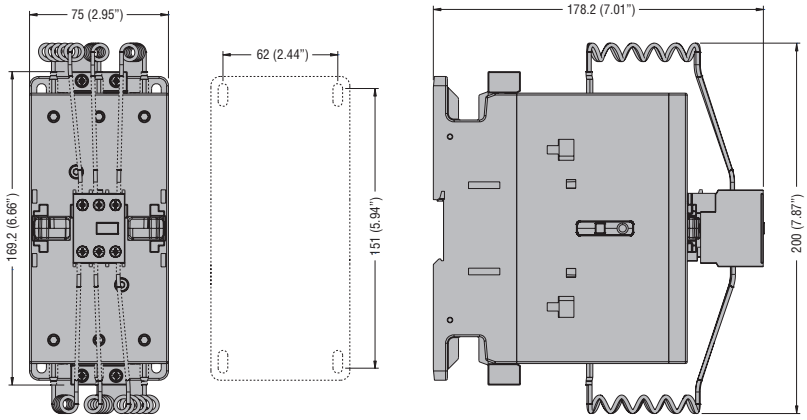


ADD-ON BLOCKS WITH BG MINI-CONTACTORS

BGX10... - BGXF10...
auxiliary contacts ❶




❶ Valid for BGX11... contacts as well when mounted on left-hand contactor of BGT or BGC assembly (p. 4-5).


BGX5000 interlock with **BGX10..., BGXF10...** contacts and **BGX77...** or **BGX78...** or **BGX79...** suppressor

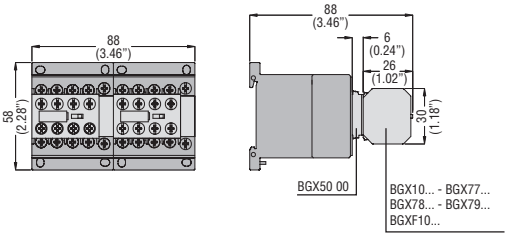


BGX77..., BGX78... or **BGX79...**
suppressor only

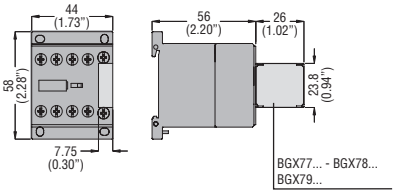


BGX8000 shroud



Paralleling links
G323, G324

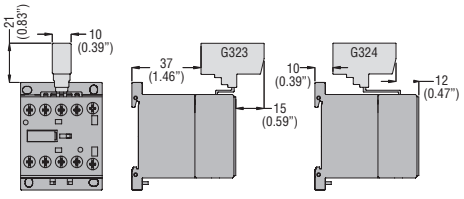

G325, G326

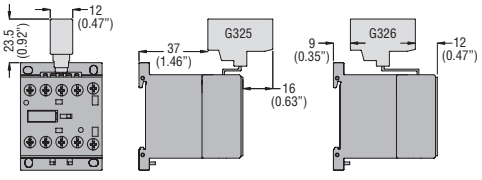


تسلاکالا
021-9102 6126 | teslakala.com


تسلاکالا
021-9102 6126 | teslakala.com

ADD-ON BLOCKS WITH BF CONTACTORS


Auxiliary contacts **BFX10...**
w/2 contacts




BFX10... w/4 contacts

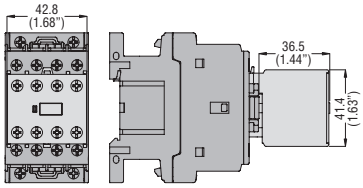


BFX12...




G484...

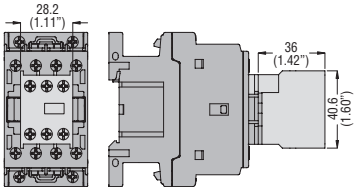


G418...

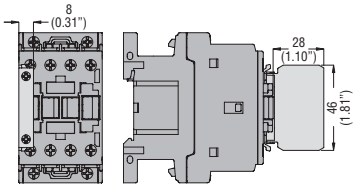


G218

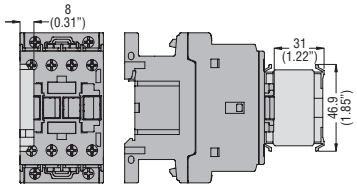


G481..., G482

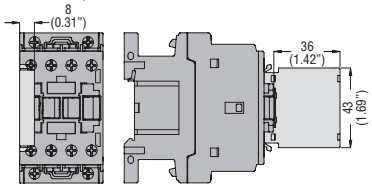


G280 with G218

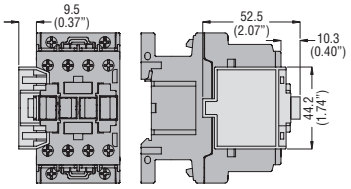


G419, with G418..., **G428..., G483** with G481... or G482

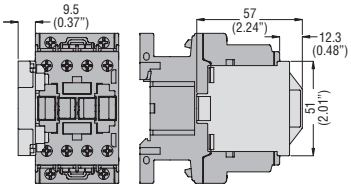


G485..., G486..., G487 delayed contacts

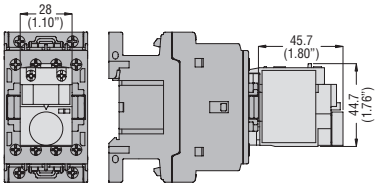


Fourth pole
BFX42




BFXD42

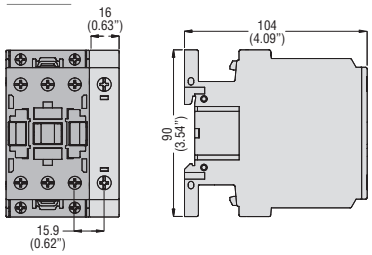


BFX43

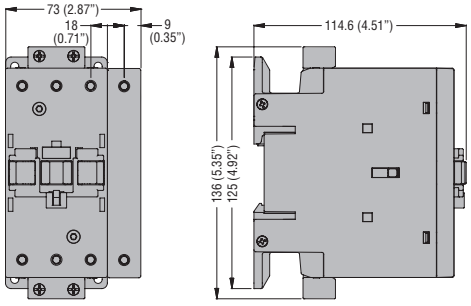


BFX44

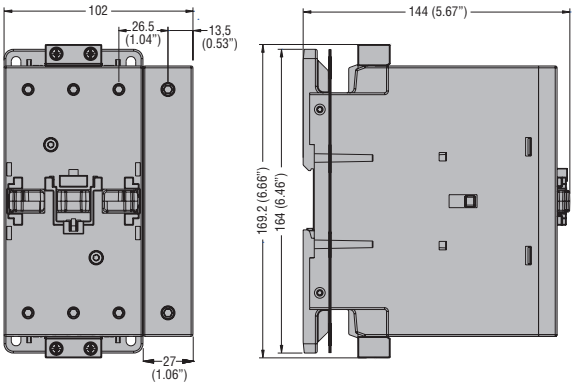


Mechanical interlocks
BFX5000, BFX5001, BFX5300, BFX5301, BFX5400, BFX5401

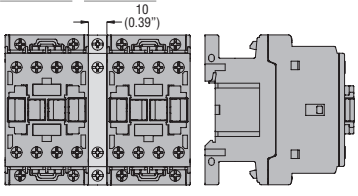


BFX5002

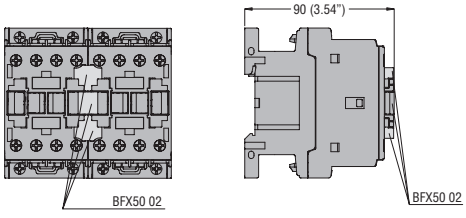


BFX5003, BFX5303, BFX5403

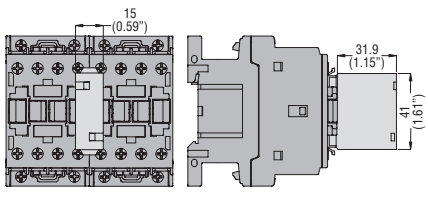


Mechanical interlocks
BFX5303 - BFX5403

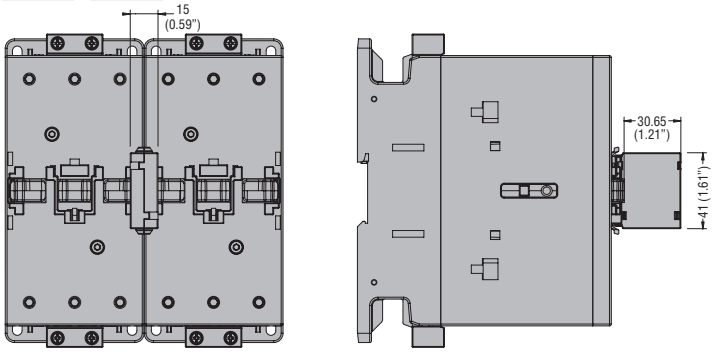


G222, G272, BFX641 mechanical latch




G454, G455, BF642 manual closing




BFX80 sealing cover




Rigid connecting kit **BFX3201**
A = 100mm (3.94") with BFX5000 and BFX5001
A = 90mm (3.54") with BFX5002 and BFX5003

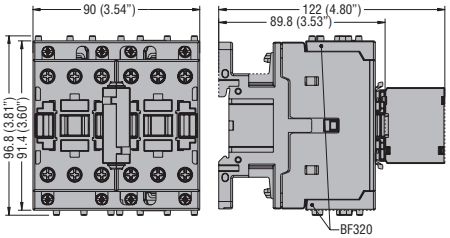


G231 terminal
1-pole




G232 terminal
1-pole




BFX8901 fixing base




BFX8902 fixing brackets

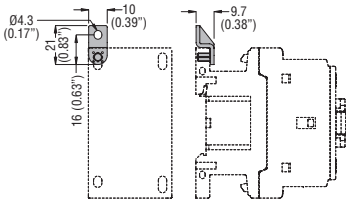


Rigid connecting kit
BFX3101

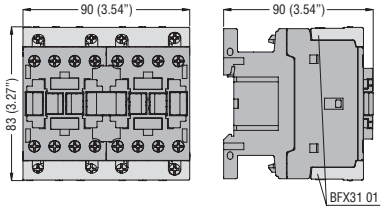


BFX3102

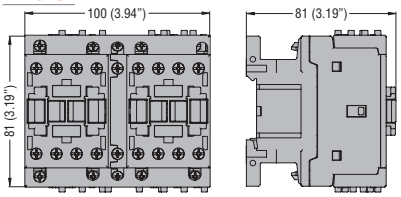


BFX3201

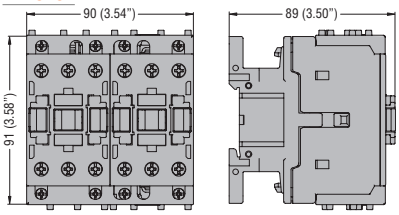


BFX3301

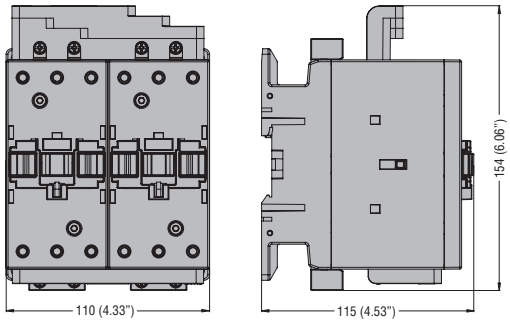


BFX3401

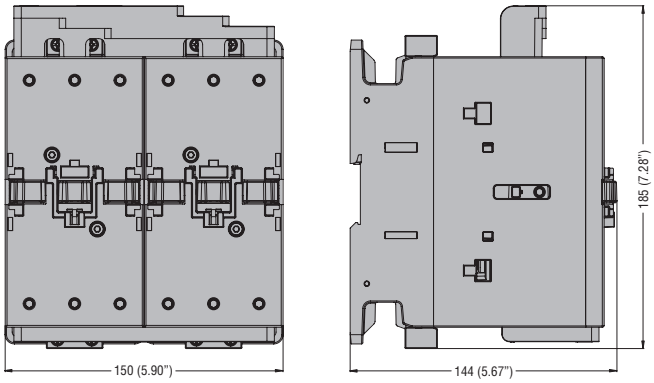

BFX3131

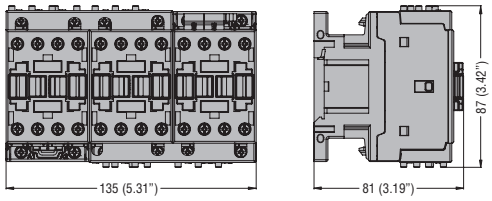


BFX3232

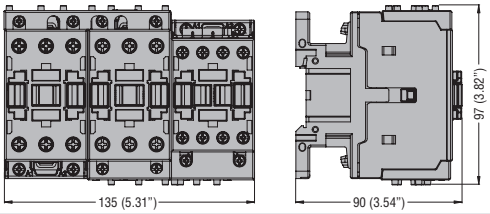


تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com


BFX3231

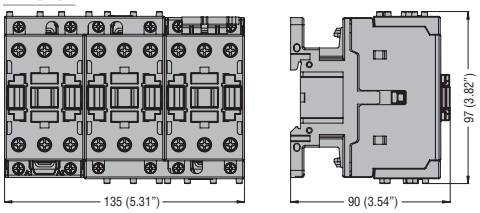


BFX3332

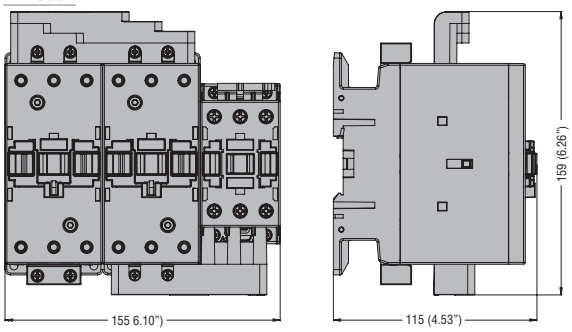


BFX3331

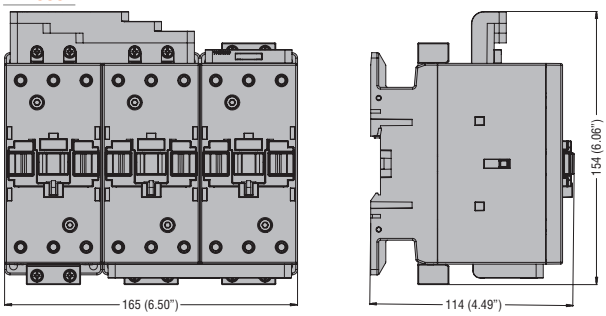


BFX3432

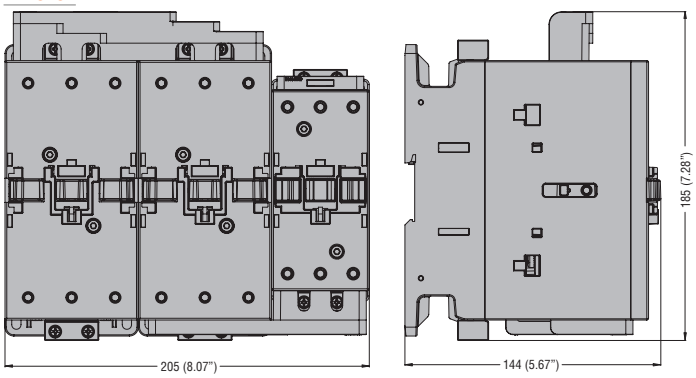


BFX3431

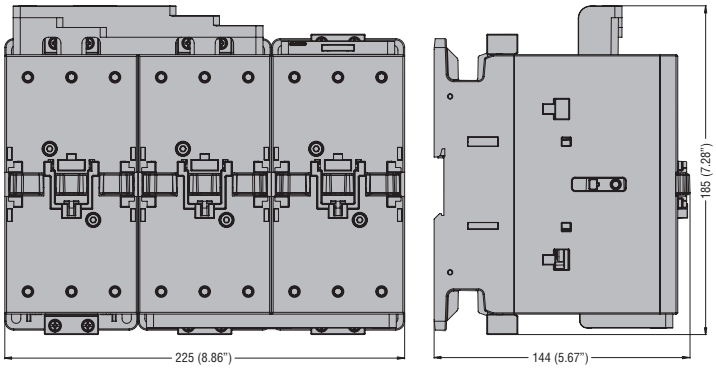


BFX3361

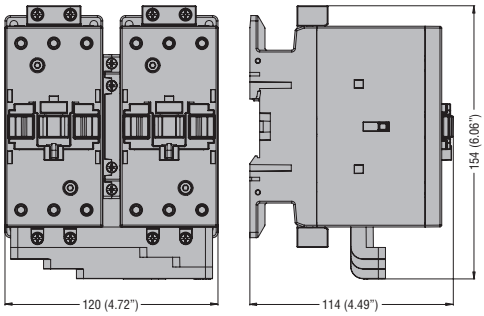


BFX3461

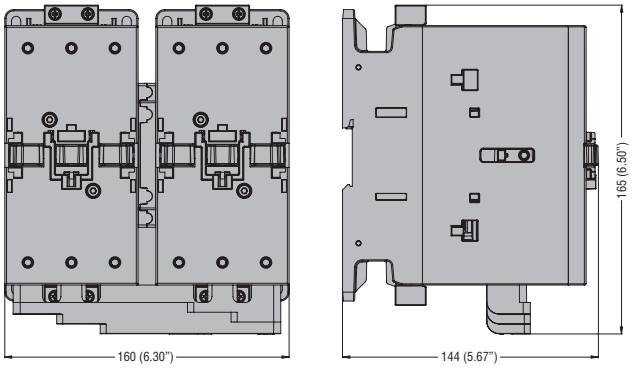

BFX3371

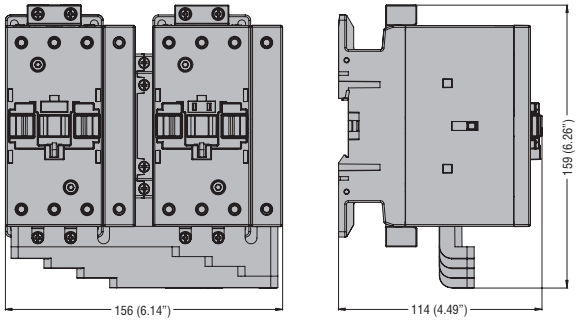


BFX3471

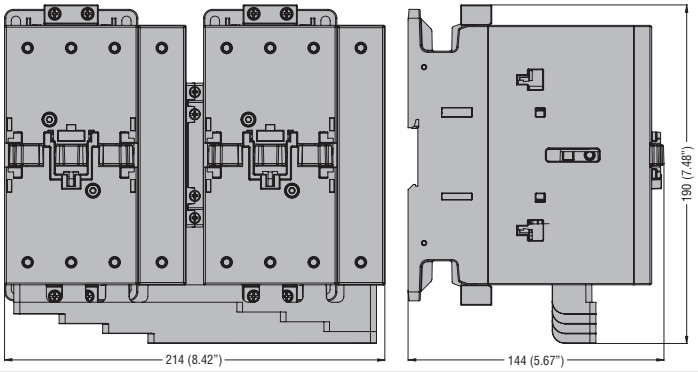


ADD-ON BLOCKS WITH BF160...BF400 CONTACTORS

BFX10C..., BFX12C... auxiliary contacts

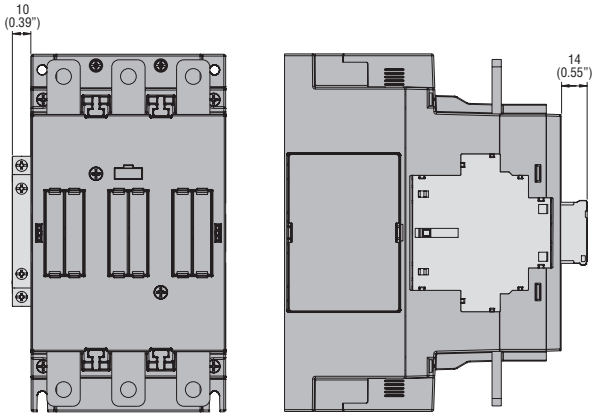


BFX5500 interlock

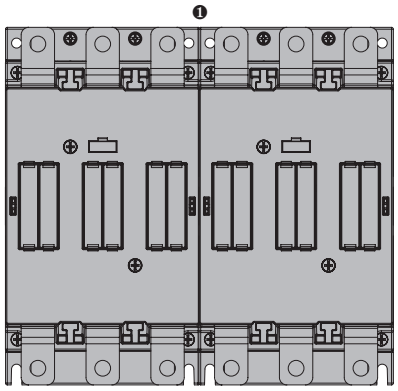

❶ The BFX5500 interlock is mounted inside the 2 contactors without dimesions increasing.


BFX5503, BFX5504 interlocks

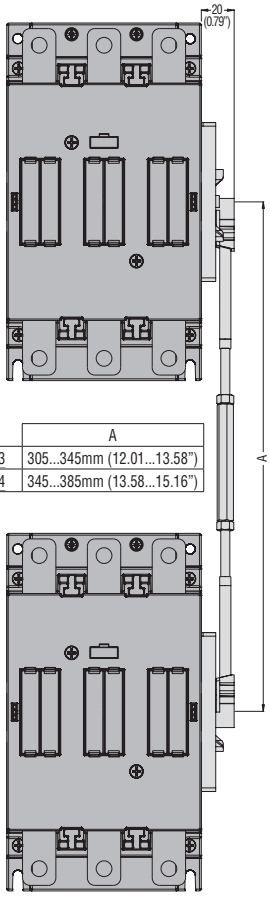


	A
BFX5503	305...345mm (12.01...13.58")
BFX5504	345...385mm (13.58...15.16")

Terminal protection

BFX835 - BFX845 - BFX836 - BFX846

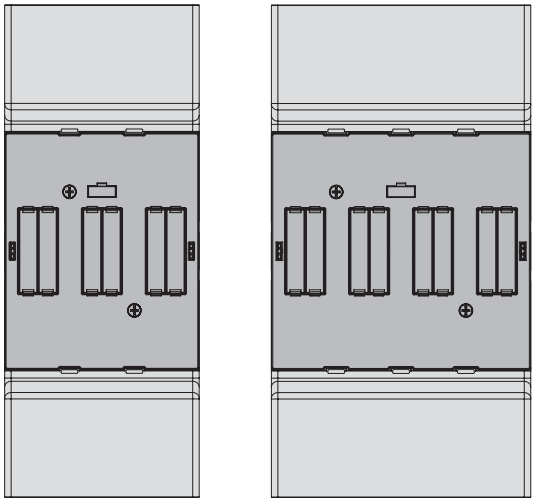


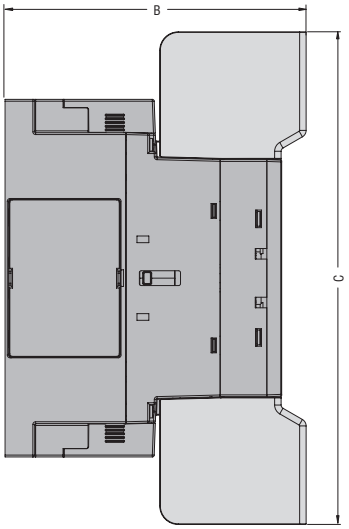


	B	C
BFX835 - BFX845	163 (6.42")	266 (10.47")
BFX836 - BFX846	193 (7.60")	384 (15.23")

Phase barrier

BFX805 - BFX806

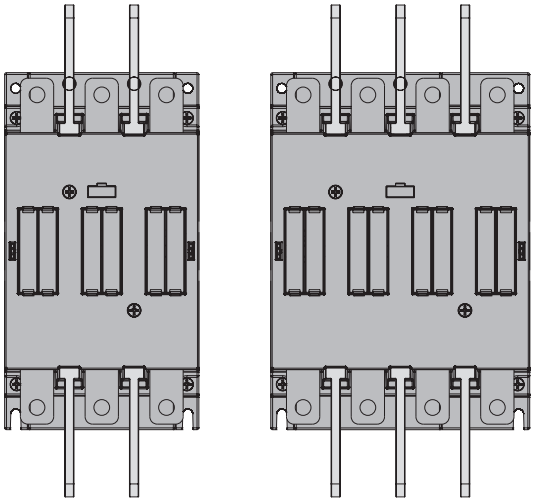

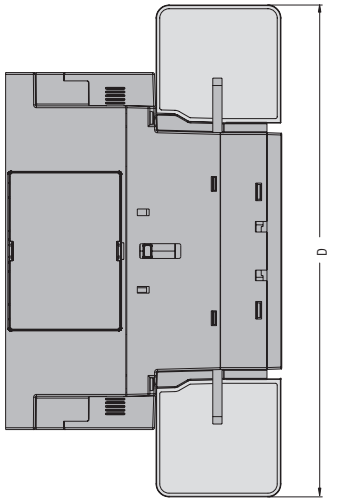


	D
BFX805	266 (10.47")
BFX806	384 (15.23")

تسلاکالا
021-9102 6126 | teslakala.com


تسلاکالا
021-9102 6126 | teslakala.com

ADD-ON BLOCKS WITH B CONTACTORS


Auxiliary contacts **G350, G354**

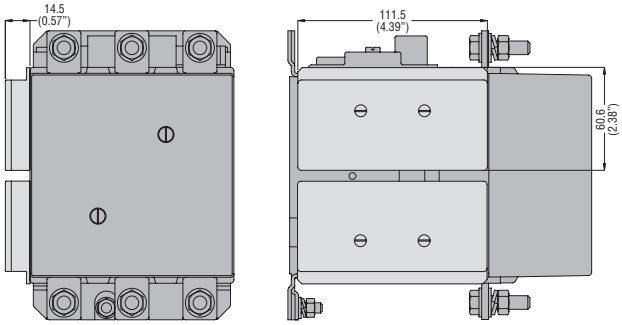


G358 adapter

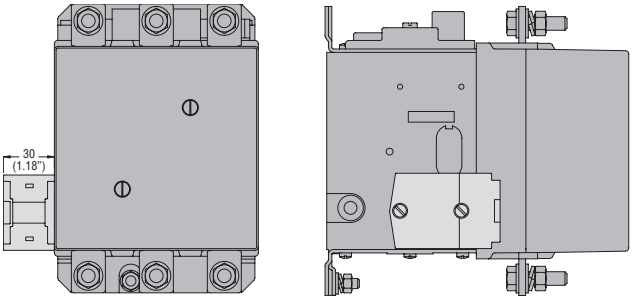

G355 interlocks

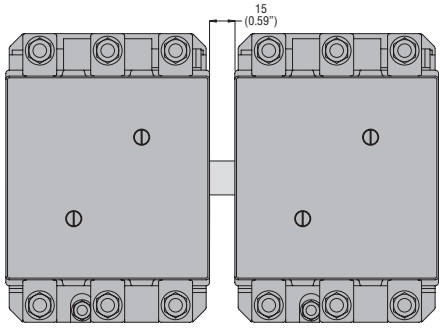


G356…

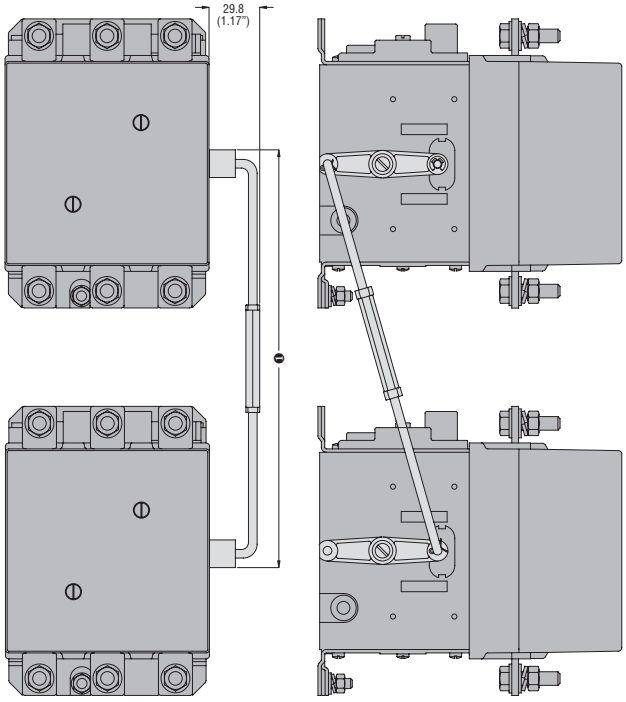


❶ For dimensions, refer to page 2-78.

Terminal protection

G527, G529

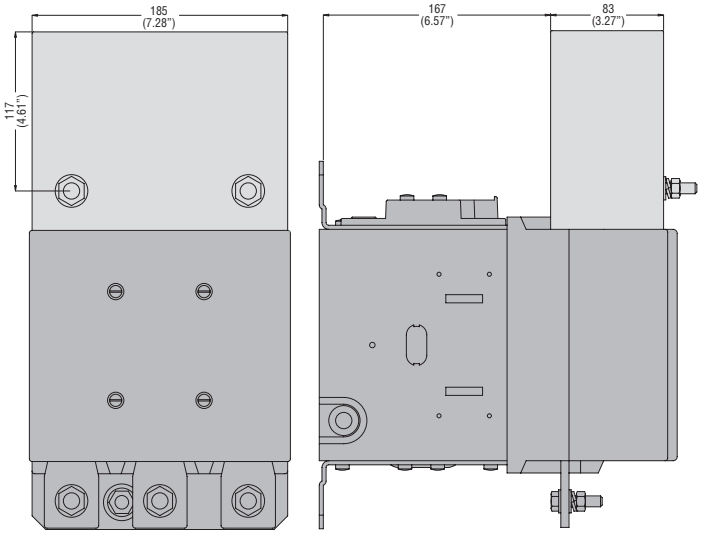


G528, G530

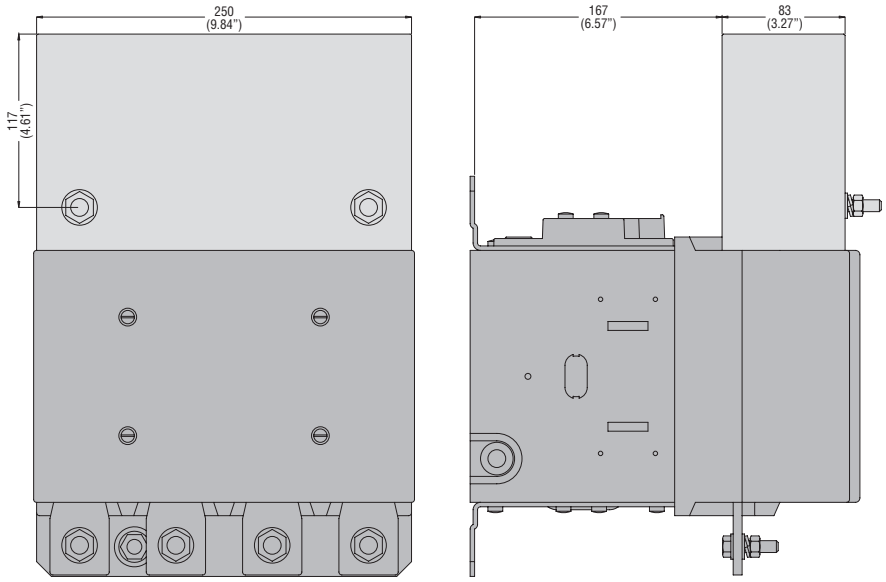


Mechanical latch on B500...B630 contactor

G495

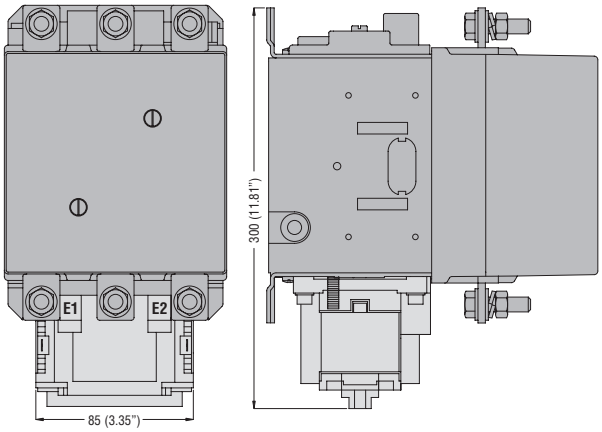

BA1845

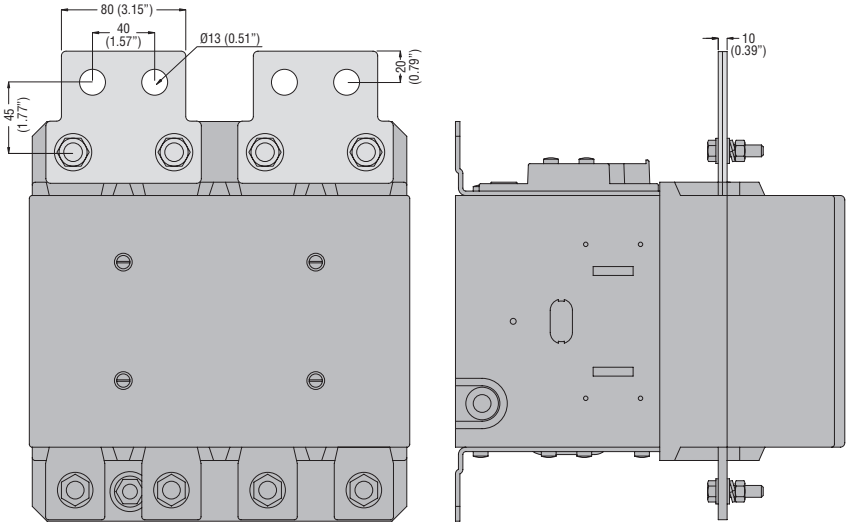


تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com


THREE-POLE CONTACTORS IN AC

BG06A - BG09A - BGF09A - BGP09A - BG12A
BF09A - BF12A - BF18A - BF25A


...10




...01



BF26A - BF32A - BF38A
BF40A - BF50A - BF65A - BF80A
BF94A - BF95A - BF115A - BF150A
B500...B630



B125024 - B160024... ❶




❶ The input electronic circuit of the contactor coil is designed and tested according to IEEEC 62.41 standards and can withstand a 10kV impulse voltage (1.2/50µs) with 50 Joule energy. The use of an auxiliary reduced voltage transformer is recommended for higher values.


THREE-POLE CONTACTORS IN DC (AC/DC for BF40E...BF400E)

BG06D - BG09D - BGF09D - BGP09D - BG12D
BG06L - BG09L - BGF09L - BGP09L - BG12L

...10




...01




BF09D - BF12D - BF18D - BF25D
BF09L - BF12L - BF18L - BF25L


...10




...01



BF26D - BF32D - BF38D
BF26L - BF32L - BF38L




BF40E - BF50E - BF65E - BF80E - BF94E
BF95E - BF115E - BF150E - BF160E - BF195E - BF230E
BF265E - BF330E - BF400E




CONTACTORS FOR POWER FACTOR CORRECTION

BFK09A - BFK12A - BFK18A
BFK26A - BFK32A - BFK38A - BFK50A - BFK65A - BFK80A - BFK94A - BFK95A - BFK115A - BFK150A

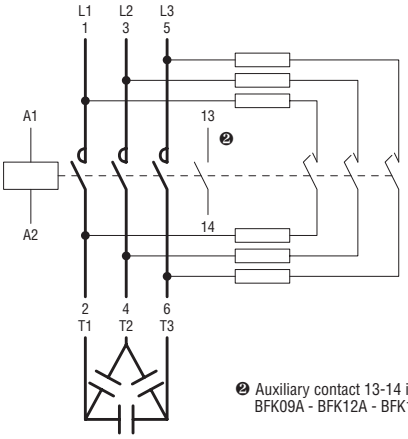


❷ Auxiliary contact 13-14 is found on BFK09A - BFK12A - BFK18A types only.


FOUR-POLE CONTACTORS IN AC
BG09T4A - BGF09T4A - BGP09T4A
BF09T4A - BF38T4A
BF50T4A - BF65T4A - BF80T4A
BF95T4A - BF115T4A - BF150T4A
BFD80T4A
B5004...B6304




B12504 - B16004

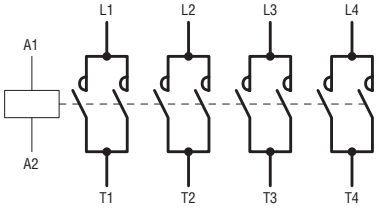


FOUR-POLE CONTACTORS IN DC (AC/DC for BF65T4E...BF400T4E)
BG09T4D - BGF09T4D - BGP09T4D




BF09T4D - BF38T4D
BF09T4L - BF38T4L




BF65T4E - BF80T4E - BF95T4E - BF150T4E - BFD150T4E
BF160T4E - BF195T4E - BF230T4E




FOUR-POLE CONTACTORS IN AC WITH 2NO AND 2NC POLES
BG09T2A




BF09T2A - BF18T2A - BF26T2A - BF38T2A
BF80T2A




WITH NC FOUR-POLES
BF18T0A - BF26T0A




FOUR-POLE CONTACTORS IN DC (AC/DC for BF80T2E) WITH 2NO AND 2NC POLES
BG09T2D




BF18T2D - BF26T2D - BF38T2D
BF18T2L - BF26T2L - BF38T2L




BF80T2E




WITH NC FOUR-POLES
BF18T0D - BF26T0D
BF18T0L




CONTROL RELAY IN AC
BG0040A - BGF0040A
BF0040A




BG0031A - BGF0031A
BF0031A




BG0022A - BGF0022A
BF0022A




BF0004A




CONTROL RELAY IN DC
BG0040D - BGF0040D
BG0040L - BGF0040L




BG0031D - BGF0031D
BG0031L - BGF0031L




BG0022D - BGF0022D
BG0022L - BGF0022L




BF0040D
BF0040L




BF0031D
BF0031L



BF0022D
BF0022L



BF0004D
BF0004L




تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com


ADD-ON BLOCKS FOR BG MINI-CONTACTORS

Auxiliary contacts

BGX1002
BGXF1002




BGX1011
BGXF1011




BGX1020
BGXF1020




BGX1004
BGXF1004




BGX1013
BGXF1013




BGX1022
BGXF1022



BGX1031
BGXF1031




BGX1040
BGXF1040




Special auxiliary contacts

BGX1111




BGX1122




Surge suppressor


BGX77…



BGX78…




BGX79…




Rigid connections

SMX9021

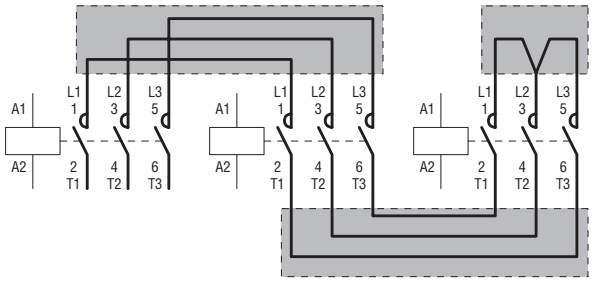

SMX9022

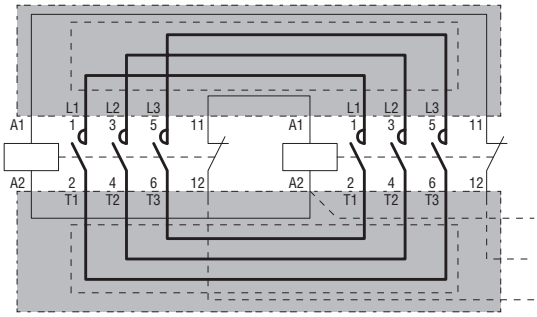


ADD-ON BLOCKS FOR BF CONTACTORS

Auxiliary contacts

BFX1002




BFX1011




BFX1020




G48430




G48421




G48412




G48403




BFX1004




BFX1013




BFX1022




BFX1031



BFX1040




BFX101111



Auxiliary contact


G218

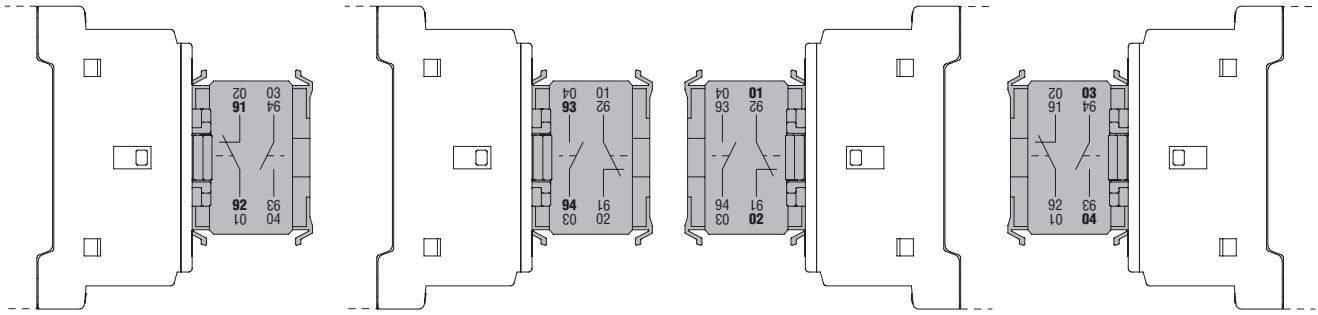


The termination of the G218 auxiliary contact has more than one numbering due to the fact that the block can assume various mounting positions.
See the numbering in boldface for a correct interpretation.

Auxiliary contacts

BFX1202
BFX12C02



BFX1211
BFX12C11



BFX1220
BFX12C20



BFX10C10



BFX10C01



G41810
G42810



G41810A
G42810A



G41801
G42801




G41801D
G42801D



G48120




G48111




G48102



G482



Mechanical latch
G222... - G272... - BFX641...

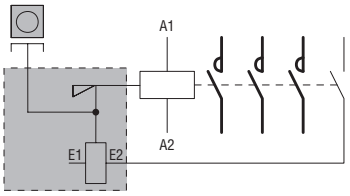


The termination of the BFX12... / G418... / G481... / G482 auxiliary contacts has more than one numbering due to the fact that the block can assume various mounting positions. See the numbering in boldface when the block is mounted on the left side of the contactor.


4th pole
BFX42 - BFX43 - BFX44
BFXD42




Interlock
BFX5001 - BFX5301
BFX5401




Delayed auxiliary contacts
G485... **G486... - G487**




Rigid connecting kits
BFX3101 - BFX3102 - BFX3201
BFX3301 - BFX3401

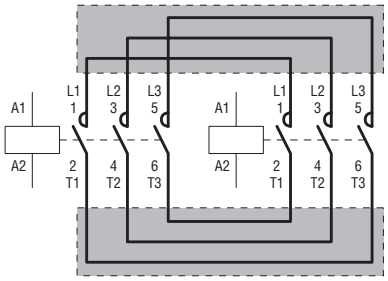


BFX3131 - BFX3231 - BFX3232 - BFX3331 - BFX3332 - BFX3431 - BFX3432

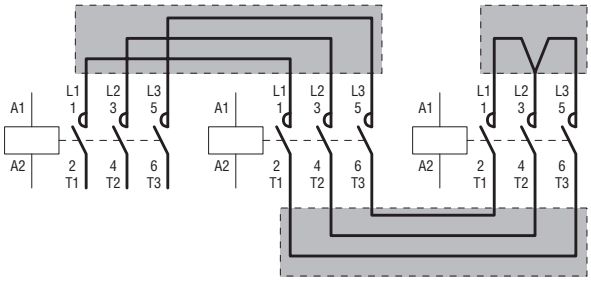

BFX3361 - BFX3461

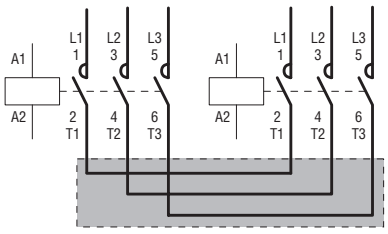


BFX3371 - BFX3471

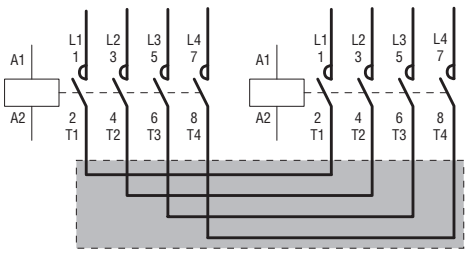


تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

ADD-ON BLOCKS FOR B CONTACTORS
Auxiliary contacts
G350 - G354

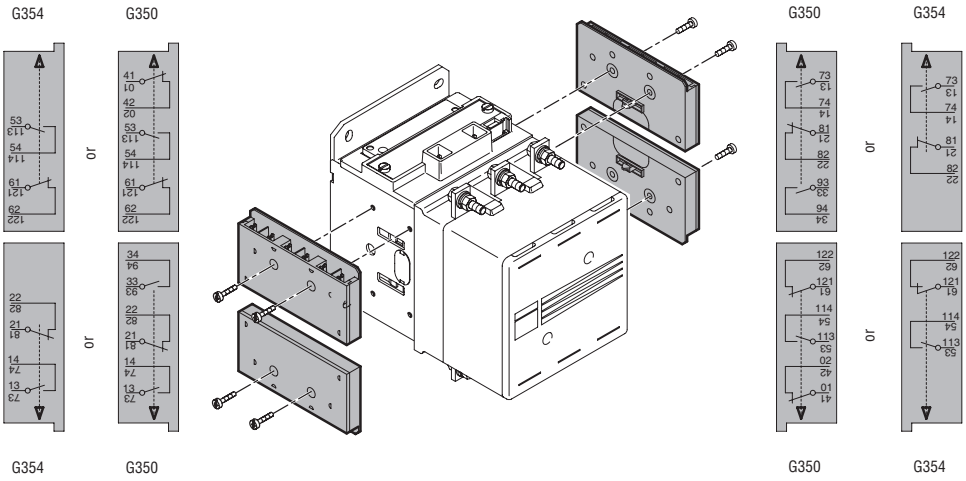

Mechanical latch
G495




MOUNTING POSITION OF CONTACTORS

ON VERTICAL PLANE

The performances given in this catalogue have been established with contactors mounted on a vertical plane with line terminals facing upwards and load terminals facing downwards.
All contactors can be mounted with a ± 30° inclination to the vertical axis of the contactor without any derating.

For BF series contactors, this inclination can reach ± 90°, that is when the terminals are facing towards left and right.
For BG mini-contactors:
– Position A, with coil terminals A1-A2 facing downwards, is not recommended.
– The position with coil terminals A1-A2 facing upwards is not recommended for mini-contactors with NC contacts.

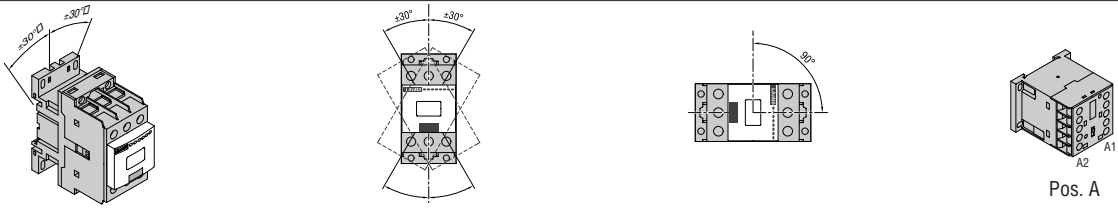


Pos. A

ON VERTICAL PLANE WITH 30° INCLINATION

All contactors can be mounted on a plane which varies in respect to the vertical up to ± 30° angle.
On the average, a 5% increase of the minimum pick-up voltage in -30° position can be noted.

This inclination is greater than the one prescribed by main naval registers.

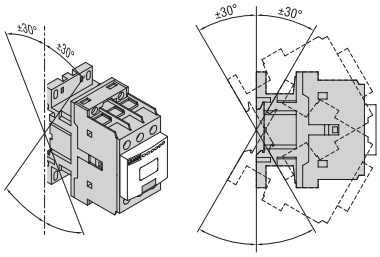


ON HORIZONTAL PLANE (FOR BF SERIES CONTACTORS)

Considerable performance variations can be noted.
It is necessary to check the two possible mounting positions:
– when the contactor is energised, the movable equipment moves upwards
– when the contactor is energised, the movable equipment moves downwards.

In the first case, it is difficult to close the contactor while in the second, to open it.

The variables which could influence the contactor performance, in addition to the two mounting positions, are:
– type of contactor
– type of control
– contact configuration
– number and type of add-on blocks
– permissible tolerance of auxiliary voltage variation
– ambient temperature.


NOTE: Position B is not recommendable.



Our Technical support (Tel. 035 4282422; E-mail: service@LovatoElectric.com) can provide further information concerning operational performance of contactors mounted on a horizontal plane.

DYNAMIC TYPE TESTS

Our contactors have sustained dynamic testing, with contactor mounting position rotated ± 22.5° in respect to the three orthogonal axes.

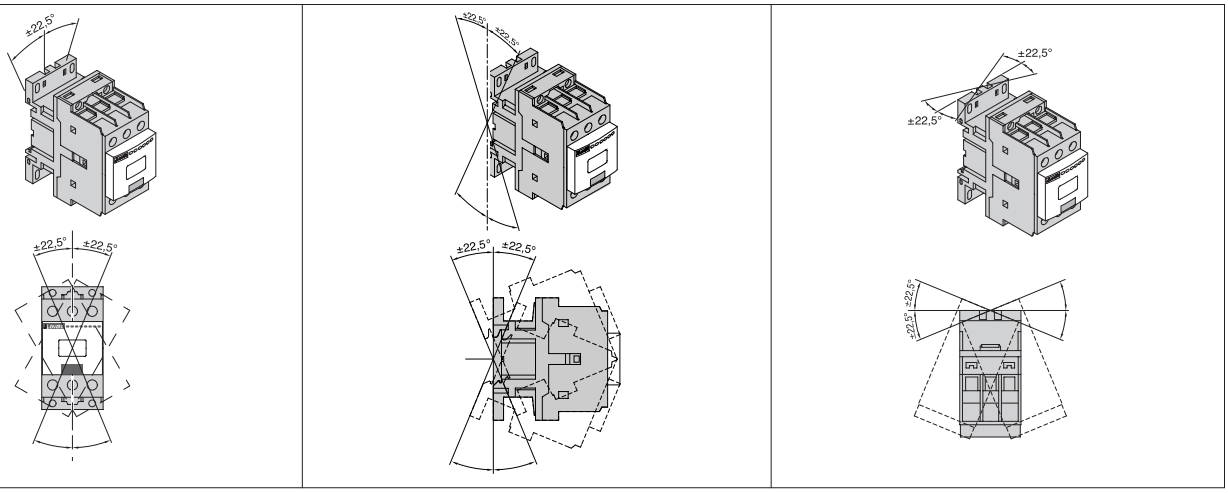

تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

IEC UTILISATION CATEGORY AC-3 / AC-3e
POLE CHARACTERISTICS
Squirrel-cage induction motors; breaking at rated motor current.

MAXIMUM IEC OPERATIONAL POWER at ambient temperature ≤55°C.


UL/CSA DUTY FOR AC MOTOR SWITCHING

POLE CHARACTERISTICS
Three-phase AC induction motors; breaking at rated motor current.
UL/CSA RATINGS at ambient temperature ≤55°C

Contactor type	IEC operational current (Ue ≤440V) [A]	IEC operational power 220/230V [kW]	380/400V [kW]	415V [kW]	440V [kW]	500V [kW]	660/690V [kW]	1000V [kW]	Maximum horsepower ratings (60Hz) Three phase 200-208V [HP]	240V [HP]	480V [HP]	600V [HP]
BG06	6	1.5	2.2	2.4	2.5	3	3	--	1½	2	3	3
BG09	9	2.2	4.0	4.3	4.5	5	5	--	2	3	5	5
BG12	12	3.2	5.7	6.2	5.5	5	5	--	3	3	7½	10
BF09	9	2.2	4.2	4.5	4.8	5.5	7.5	--	3	3	5	7½
BF12	12	3.2	5.7	6.2	6.2	7.5	10	--	5	5	7½	10
BF18	18	4	7.5	9	9	10	10	--	5	5	10	15
BF25	25	7.0	12.5	13.4	13.4	15	18	--	7½	7½	15	15
BF26	26	7.3	13	14	14	15.6	18.5	--	7½	7½	15	20
BF32	32	8.8	16	17	17	20	22	--	10	10	20	25
BF38	38	11	18.5	18.5	18.5	20	22	--	10	15	30	30
BF40	40	11	18.5	22	22	22	30	22	10	15	30	30
BF50	50	15	22	30	30	30	37	30	15	20	40	40
BF65	65	18.5	30	37	37	37	45	30	20	25	50	60
BF80	80	22	45	45	45	55	55	37	25	30	60	75
BF94	95	30	55	55	55	55	55	37	25	30	60	75
BF95	95	30	55	55	55	75	90	45	30	30	60	75
BF115	115	37	55	55	55	75	110	55	40	40	75	100
BF150	150	45	75	75	75	90	110	55	50	50	100	125
BF160	160	45	75	90	90	110	132	75	50	50	100	125
BF195	195	55	90	110	110	132	160	110	60	75	150	150
BF230	230	55	110	110	132	132	160	132	75	75	150	200
BF265	265	75	132	132	160	160	200	160	75	100	200	250
BF330	320	90	160	160	160	200	250	200	100	125	250	300
BF400	420	110	200	200	200	250	315	220	125	150	350	400
B500	520	156	290	306	328	367	416	312	150 ❶	200 ❶	400 ❶	450 ❶
B630	630	198	335	368	368	368	440	368	200 ❶	250 ❶	500 ❶	500 ❶

❶ No UL/CSA ratings; data given for indication and reference purposes only.

ELECTRICAL IEC LIFE FOR MOTOR CONTROL AC3 ≤440V
Electrical life of contactors

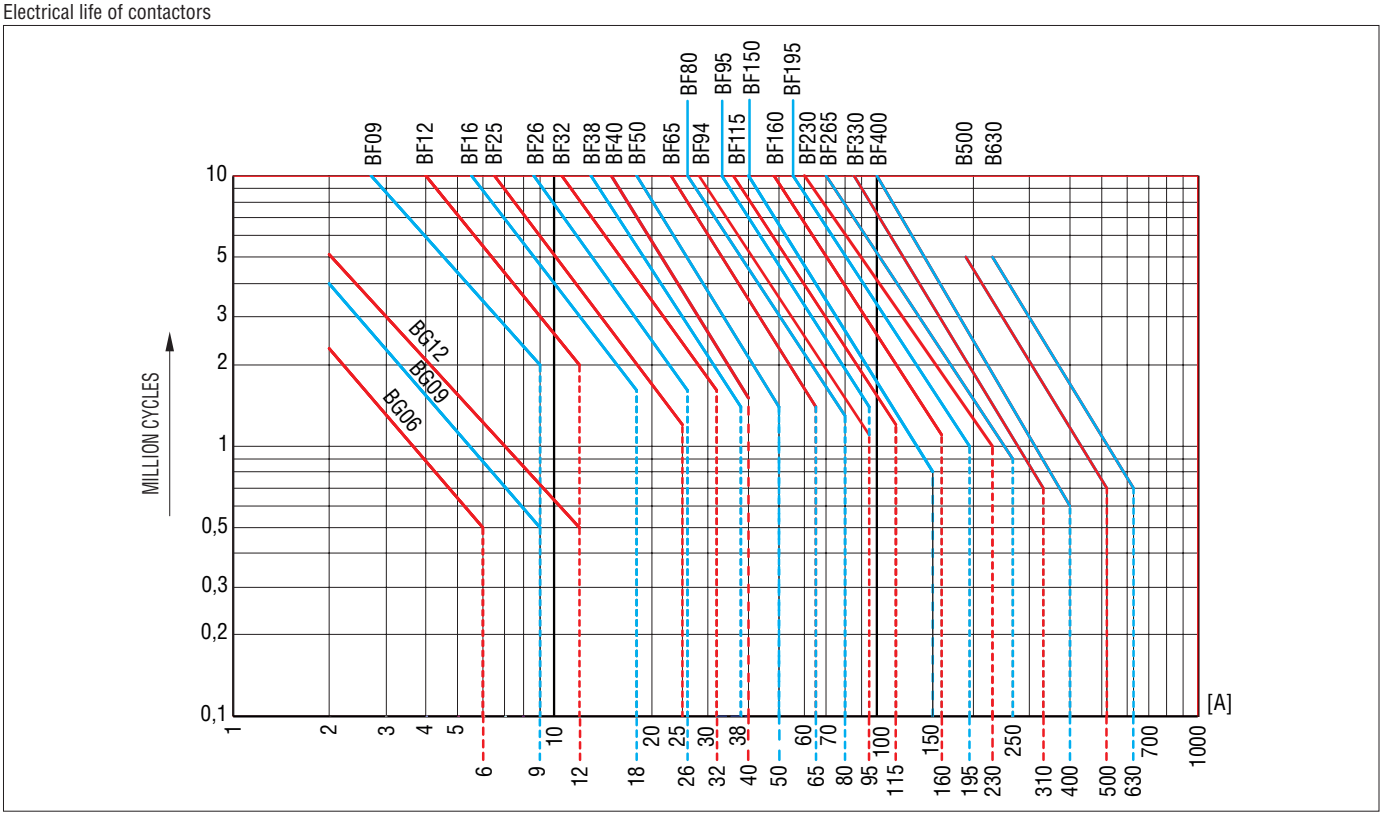

IEC DC UTILISATION CATEGORY
POLE CHARACTERISTICS

MAXIMUM OPERATIONAL CURRENT

IEC Voltage Ue	Contactor Type	IEC Maximum current Ie [A] in categories: DC1 with L/R ≤ 1ms and poles in series 1	2	3	4	DC3 - DC5 with L/R ≤ 15ms and poles in series 1	2	3	4
≤ 24V	**BG06**	9	12	14	–	6	7	9	–
	BG09	12	15	16	16	7	8	10	10
	BG12	12	15	16	–	7	8	10	–
	BF09	15	18	20	20	10	13	15	15
	BF12	17	20	22	20	12	15	18	15
	BF18	17	20	22	22	12	15	18	18
	BF25	20	23	23	–	15	18	22	–
	BF26	25	28	28	28	18	20	25	30
	BF32	30	32	32	–	20	25	30	–
	BF38	35	36	36	36	24	28	32	32
	BF40	40	48	48	–	27	32	40	–
	BF50	45	60	60	60	30	35	50	55
	BF65	50	70	70	70	35	45	55	60
	BF80	70	100	100	100	40	60	80	90
	BF94	77	110	110	115	45	65	86	96
	BF95	140	140	140	140	140	140	140	140
	BF115	160	160	160	160	160	160	160	160
	BF150	165	165	165	165	165	165	165	165
48V	**BG06**	8	11	14	–	5	7	9	–
	BG09	10	14	16	16	6	8	10	10
	BG12	10	14	16	–	6	8	10	–
	BF09	13	18	20	20	9	11	15	15
	BF12	15	20	22	20	11	13	18	15
	BF18	15	20	22	22	11	13	18	18
	BF25	18	23	23	–	13	18	22	–
	BF26	21	28	28	28	15	20	25	30
	BF32	26	32	32	–	17	22	28	–
	BF38	30	34	34	34	20	25	28	28
	BF40	35	48	48	–	23	30	40	–
	BF50	40	60	60	60	25	35	50	55
	BF65	50	70	70	70	25	40	50	60
	BF80	60	100	100	100	30	50	70	90
	BF94	66	110	110	115	33	55	75	95
	BF95	140	140	140	140	44	63	115	110
	BF115	160	160	160	160	50	72	150	120
	BF150	165	165	165	165	60	82	195	130
75V	**BG06**	4	7	8	–	2	4	5	–
	BG09	4	9	10	10	2	5	6	6
	BG12	4	9	10	–	2	5	6	–
	BF09	12	17	20	20	8	10	13	15
	BF12	13	18	20	20	10	12	15	15
	BF18	15	20	20	20	11	13	16	16
	BF25	18	23	23	–	13	16	18	–
	BF26	18	25	25	25	13	18	20	25
	BF32	22	28	32	–	15	20	28	–
	BF38	23	29	33	33	17	22	28	28
	BF40	30	45	48	–	19	27	38	–
	BF50	40	60	60	60	22	30	45	55
	BF65	50	70	70	70	25	40	50	60
	BF80	60	100	100	100	30	50	70	90
	BF94	66	110	110	115	33	55	75	95
	BF95	100	140	155	155	36	60	90	110
	BF115	120	160	160	160	40	65	100	120
	BF150	150	165	165	165	44	70	110	130

تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

POLE CHARACTERISTICS

MAXIMUM OPERATIONAL CURRENT

IEC Voltage Ue	Contactor Type	IEC Maximum current Ie [A] in categories: DC1 with L/R ≤ 1ms and poles in series 1	2	3	4	DC3 - DC5 with L/R ≤ 15ms and poles in series 1	2	3	4
110V	**BG06**	3	6	8	–	1	3	4	–
	BG09	3	8	10	10	1	4	5	5
	BG12	3	8	10	–	1	4	5	–
	BF09	6	12	15	16	2	7	11	12
	BF12	6	13	16	16	2	8	12	16
	BF18	6	13	16	18	2	8	12	13
	BF25	6	16	18	–	2	10	15	–
	BF26	6	22	24	24	2	13	18	20
	BF32	8	25	27	–	2.5	15	20	–
	BF38	8	32	34	34	2.5	18	23	23
	BF40	8	42	44	–	3	22	27	–
	BF50	8	50	55	60	3	25	30	45
	BF65	8	60	60	70	3	30	35	50
	BF80	8	80	85	100	3	40	60	75
	BF94	8	90	93	110	3	43	64	80
	BF95	10	110	120	140	6	55	85	105
	BF115	10	130	140	160	6	65	100	125
	BF150	10	150	160	165	6	80	120	150
220V	**BG06**	–	–	1	–	–	–	0.5	–
	BG09	–	–	2	2	–	–	0.8	0.8
	BG12	–	–	2	–	–	–	0.8	–
	BF09	–	1	10	12	–	2	6	7
	BF12	–	1	11	12	–	2	6	7
	BF18	–	1	11	13	–	2	6	8
	BF25	–	1	12	–	–	2	8	–
	BF26	–	2	20	26	–	3	19	15
	BF32	–	3	23	–	–	3	23	–
	BF38	–	4	30	38	–	3	25	15
	BF40	–	5	56	70	–	5	32	40
	BF50	–	7	75	90	–	5	40	50
	BF65	–	9	90	110	–	5	52	65
	BF80	–	9	95	115	–	5	64	80
	BF94	–	9	95	115	–	5	64	80
	BF95	–	12	125	140	–	7	76	95
	BF115	–	14	145	160	–	7	92	115
	BF150	–	14	150	165	–	7	120	150

IEC DC UTILISATION CATEGORY
POLE CHARACTERISTICS

MAXIMUM OPERATIONAL CURRENT

IEC Voltage Ue	and poles in series	IEC Maximum current Ie [A] in categories: DC1 with L/R ≤ 1ms and poles in series				DC3 - DC5 with L/R ≤ 15ms and poles in series			
	Type	1	2	3	4	1	2	3	4
75V	**BF160**	250	250	250	250	160	160	160	160
	BF195	275	275	275	275	180	180	180	180
	BF230	350	350	350	350	250	250	250	250
	BF265	350	350	350	350	280	280	280	280
	BF330	375	375	375	375	310	310	310	310
	BF400	400	400	400	400	350	350	350	350
	B500	650	650	650	650	550	550	550	550
	B630	800	800	800	800	800	800	800	800
110V	**BF160**	110	150	160	250	80	120	140	140
	BF195	120	170	170	275	90	140	160	160
	BF230	145	270	270	350	135	225	250	250
	BF265	160	300	300	300	150	250	280	280
	BF330	195	350	350	350	170	290	310	310
	BF400	250	400	400	400	200	350	350	350
	B500	320	550	600	600	320	550	550	550
	B630	460	800	800	800	460	800	800	800
220V	**BF160**	--	130	150	250	--	90	120	140
	BF195	--	150	170	275	--	100	140	160
	BF230	--	225	270	350	--	180	225	225
	BF265	--	250	300	300	--	200	250	280
	BF330	--	300	350	350	--	230	290	310
	BF400	--	350	400	400	--	280	350	350
	B500	--	450	600	600	--	450	550	550
	B630	--	700	800	800	--	700	800	800
330V	**BF160**	-	-	130	150	--	--	90	140
	BF195	--	--	150	170	--	--	100	160
	BF230	--	--	225	270	--	--	180	210
	BF265	--	--	250	300	--	--	200	280
	BF330	--	--	300	350	--	--	230	310
	BF400	--	--	350	400	--	--	280	350
	B500	--	--	450	600	--	--	450	550
	B630	--	--	700	750	--	--	650	700
460V	**BF160**	--	--	--	130	--	--	--	90
	BF195	--	--	--	150	--	--	--	100
	BF230	--	--	--	225	--	--	--	180
	BF265	--	--	--	250	--	--	--	200
	BF330	--	--	--	300	--	--	--	230
	BF400	--	--	--	350	--	--	--	280
	B500	--	--	--	450	--	--	--	450
	B630	--	--	--	700	--	--	--	700

تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

IEC UTILISATION CATEGORIES DC1, DC3 AND DC5.
POLE CHARACTERISTICS

CHOICE CRITERIA

The elements to be considered for the contactor choice are:
-- Rated operational current Ie
-- Rated operational voltage Ue
-- Utilisation category and L/R time constant
-- Eventual verification of electrical life.

OPERATING CONDITIONS

Indicated current is valid for:
-- Ambient temperature ≤ 55°C
-- Operating cycles: up to 120 cy/h with 60% on-load factor
up to 250 cy/h with 30% on-load factor.

POLES IN SERIES

It is important to use contactors with the indicated number of poles in series depending on operating voltage.
The poles in series can be connected to one single polarity or divided between the two polarities of the circuit indifferently.
NOTE. For voltages lower than 30V, the diagrams given in figures 3 and 4 are not recommendable since voltage drops can take place. In these cases, it is better to use poles in parallel considering the notes given in the following section.

Examples of poles in series:

1 POLE




Fig. 1

2 POLES




Fig. 2

3 POLES




Fig. 3

4 POLES




Fig. 4

POLES IN PARALLEL

It is possible to increase the electrical life by placing poles in series when using voltages which require 1 or 2 poles in parallel.
Poles in parallel do not increase the maximum operational current given in the previous pages; that is, if one pole has a maximum operational current in DC5 of 8A, two poles in parallel, it will always be 8A.
With poles in parallel, it is possible to increase the rated contact capacity (Ith) only if the contactor opens and closes in no-load conditions or when used as resistance shunts.
In this case, the contact capacity can be increased.

The value can be obtained by multiplying the rated current of one pole by the K factor given below; e.g.: if one pole carries 10A, three-poles in parallel can carry 10 x 2.2 = 22A.
Therefore, the operating current is the one indicated in the tables, multiplied by the K factor given below which takes into consideration the unequal current division on the various poles.
2 POLES in parallel K = 1.6
3 POLES in parallel K = 2.2
4 POLES in parallel K = 2.8

Examples of poles in parallel:

1 POLE in series and
2 POLES in parallel



Fig. 5

1 POLE in series and
3 POLES in parallel




Fig. 6

1 POLE in series and
4 POLES in parallel




Fig. 7

2 POLE in series and
2 POLES in parallel




Fig. 8

MAXIMUM OPERATIONAL CURRENT

See tables on pages 2-59 to 2-61.

OTHER CONDITIONS

For different operating conditions or voltage not included among those indicated in the tables, on pages 2-59 to 2-61, consult Technical support (Tel. 035 4282422; E-mail: service@LovatoElectric.com).

IEC SELECTION GUIDE FOR LIGHTING CIRCUIT SWITCHING

GENERAL INFORMATION

The elements which are to be considered for the contactor choice are:
- Type of lamp
- Power factor (cosφ)
- With or without power factor correction
- Value of current when switching on and in running conditions.

Depending on the number and type of lamps, it is also important to bear in mind the main discriminating characteristics given below for the contactor choice:
- Incandescent lamps → contactor making capacity
- Lamps not corrected → rated contactor current in AC1
- Lamps corrected → rated contactor current in AC3

The table below summarises the major characteristics depending on the more commonly used type of lamps:

Type of lamps	Switching on Multiple of In❶	cosφ	Switching off Multiple of In❶	cosφ
Incandescent	15	1	1	1
Mixed light	1.3	1	1	1
Fluorescent	1.15...1.3	0.2	1	0.3...0.5 (not corrected) 1 (corrected)
High-pressure mercury vapour	1.5...1.75	0.2	1	0.45...0.7 (not corrected)
High-pressure sodium vapour	1.3...1.5	0.2	1	0.3...0.5 (not corrected)
Low-pressure sodium vapour	1	0.2...0.5	1	0.2...0.5 (not corrected)
Metal halide	1.7...2.1	0.2	1	0.4...0.5 (not corrected)
LED	20...40 ❺	0.6...0.95	1	0.6...0.95

Lamp features		Lamp power	Rated current	Capacitor capacity	Maximum number [n] of lamps for each contactor pole ❷										
					BG06 BG09 BG12	BF09 BF12 BF18	BF25	BF26 BF32	BF38	BF40 BF50	BF65 BF80 BF94	BF95	BF115 BF150	BF160	BF195 BF230
		[W]	[A]	[µF]											
LED 220...240V 50/60Hz	See note ❻				Each pole can carry 67% of the rated current AC3 ❻										
INCANDESCENT	50/60Hz	60	0.27	-	30	48	92	118	129	203	240	296	370	425	462
220...240V		100	0.45	-	18	28	55	71	77	122	144	177	222	255	277
		200	0.91	-	8	14	27	35	38	60	71	87	109	126	137
		300	1.4	-	5	9	17	22	25	39	46	57	71	82	89
		500	2.3	-	3	5	10	13	15	23	28	34	43	50	54
		1000	4.6	-	1	2	5	6	7	11	14	17	21	25	27
MIXED LIGHT	50/60Hz	100	0.45	-	20	33	57	77	88	122	144	177	244	311	377
220...240V		160	0.72	-	12	20	36	48	55	76	90	111	152	194	236
		250	1.13	-	8	13	23	30	35	48	57	70	97	123	150
		500	2.3	-	4	6	11	15	17	23	28	34	47	60	73
		1000	4.6	-	1	3	5	7	8	11	14	17	23	30	36
ELECTRONIC BALLAST FLUORESCENT	Single mounting	16 / 18	0.1	(6.8) ❸	48	80	160	220	220	400	450	500	750	1050	1200
		32 / 36	0.18	(6.8) ❸	27	44	88	122	122	222	250	277	416	583	666
220...240V 50/60Hz (EVG)		50 / 58	0.27	(10) ❸	17	29	59	82	82	148	166	185	277	388	444
	Dual mounting	2x16 / 18	0.18	(10) ❸	26	44	88	122	122	222	250	277	416	583	666
		2x32 / 36	0.35	(10) ❸	13	22	45	62	62	114	128	142	214	300	342
		2x50 / 58	0.52	(22) ❸	9	15	30	42	42	76	86	96	144	201	230
STANDARD FLUORESCENT	Not corrected	15	0.35	-	25	42	74	100	114	157	185	228	314	400	485
220...240V	Single mounting	20	0.37	-	24	40	70	94	108	148	175	216	297	378	459
		40	0.44	-	20	34	59	79	90	125	147	181	250	318	386
		65	0.7	-	12	21	37	50	57	78	92	114	157	200	242
		115	1.5	-	6	10	17	23	26	36	43	53	73	93	113
		140	1.5	-	6	10	17	23	26	36	43	53	73	93	113
	Corrected	15	0.11	4.5	24	40	62	94	94	200	200	200	533	533	533
	Single mounting	20	0.16	4.5	24	40	62	94	94	200	200	200	533	533	533
		40	0.24	4.5	24	40	62	94	94	200	200	200	458	500	520
		65	0.4	7	15	25	40	50	57	125	128	128	275	300	312
		115	0.7	18	6	10	15	23	23	50	50	50	133	133	133
		140	0.7	18	6	10	15	23	23	50	50	50	133	133	133
	DUO circuit	2 x 20	0.26 ❹	-	54	57	100	153	153	211	250	307	423	538	653
		2 x 40	0.46 ❹	-	19	32	56	86	86	119	141	173	239	304	369
		2 x 65	0.7 ❹	-	12	21	37	57	57	78	92	114	157	200	242
		2 x 115	1.3 ❹	-	6	11	20	30	30	42	50	61	84	107	130
		2 x 140	1.5 ❹	-	6	10	17	26	26	36	43	53	73	93	113

❶ In = Rated lamp current.
❷ For 220/240V circuits, either single-phase (between phase and neutral) or 2-wire (between phase and phase), the maximum number of lamps is as per the table.
For three-phase circuits with neutral 380/415V or 220/240V, the maximum number of lamps controlled by the same contactor is n • 3.
For three-phase 380/415V circuits without neutral, the maximum number of lamps controlled by the same contactor is n • √3.
Electrical life is 100,000 cycles up to 55°C.
❸ Incorporated capacitor.
❹ Total.
❺ With reference to the AC side of the power supplies.
❻ Usually, each light has its own power supply. If a power supply controls several lights, the number of power supplies must be factored into the calculation. The sum of the rated currents of the power supplies connected to each pole of the contact must not exceed 67% of the rated current AC-3 of the contactor indicated on page 2-6.
e.g. BF18 has a rated current AC-3 of 18A; it can control 18x0.67=12.06A per pole at most.

تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

Lamp features		Lamp power [W]	Rated current [A]	Capacitor capacity [µF]	Maximum number [n] of lamps for each contactor pole❶ BG06 BG09 BG12	BF09 BF12 BF18	BF25	BF26 BF32	BF38	BF40 BF50	BF65 BF80 BF94	BF95	BF115 BF150	BF160	BF195 BF230
HIGH-PRESSURE MERCURY VAPOUR 220...240V 50/60Hz	Not corrected	50	0.61	-	10	16	26	36	44	65	73	82	122	172	196
		80	0.8	-	7	12	20	27	33	50	56	62	93	131	150
		125	1.2	-	5	8	13	18	22	33	37	41	62	87	100
		250	2.2	-	3	4	7	10	12	18	20	22	34	47	54
		400	3.4	-	2	3	5	6	7	11	13	14	22	30	35
		700	5.5	-		1	3	4	4	7	8	9	13	19	21
		1000	8	-		1	2	2	3	5	5	6	9	13	15
	Corrected	50	0.29	7	15	25	40	60	60	128	128	128	258	342	342
		80	0.42	8	13	22	35	52	53	95	107	112	178	250	285
		125	0.7	10	8	14	22	31	35	57	64	71	107	150	171
		250	1.3	18	4	7	12	16	19	30	34	38	57	80	92
		400	2.1	25	2	4	7	10	11	19	21	23	35	50	57
		700	3.6	40	-	2	4	6	6	11	12	13	20	29	33
		1000	5.3	60	-	1	3	4	4	7	8	9	14	19	22
380...415V 50/60Hz	Not corrected	2000	8	-		-	1	2	2	3	3	4	5	8	9
	Corrected	2000	5.5	35		-	1	2	2	4	5	5	8	11	13
HIGH-PRESSURE SODIUM VAPOUR 220...240V 50/60Hz	Not corrected	150	1.8	-	3	5	8	12	15	22	25	27	41	58	66
		250	3	-	2	3	5	7	9	13	15	16	25	35	40
		400	4.7	-	1	2	3	4	5	8	9	10	15	22	25
		600	7.1	-	-	1	2	3	3	5	6	6	10	15	16
		1000	10.4	-		-	1	2	2	3	4	4	7	10	11
	Corrected	150	0.83	20	-	9	14	19	21	45	45	45	90	120	120
		250	1.5	36	-	5	7	10	11	25	25	25	50	66	66
		400	2.4	48	-	3	5	6	7	16	18	18	31	43	50
		600	3.5	68	-	2	3	4	4	10	12	12	20	28	34
		1000	6.3	120	-	1	1	2	2	6	7	7	11	16	19
LOW-PRESSURE SODIUM VAPOUR 220...240V 50/60Hz	Not corrected	35	1.5	-	4	6	10	14	18	26	30	33	50	70	80
		55	1.5	-	4	6	10	14	18	26	30	33	50	70	80
		90	2.4	-	3	4	6	9	11	16	18	20	31	43	50
		135	3.1	-	2	3	5	7	8	12	14	16	24	33	38
		150	3.2	-	2	3	5	6	8	12	14	15	23	32	37
		180	3.3	-	2	3	4	6	8	12	13	15	22	31	36
	Corrected	35	0.31	20	-	6	10	14	18	45	45	45	120	120	120
		55	0.42	20	-	6	10	14	18	45	45	45	120	120	120
		90	0.63	30	-	4	6	9	11	30	30	30	80	80	80
		135	0.94	40	-	3	5	7	8	22	22	22	60	60	60
		150	1	40	-	3	5	6	8	22	22	22	60	60	60
		180	1.2	40	-	3	4	6	8	22	22	22	60	60	60
METAL HALIDE 220...240V 50/60Hz	Not corrected	35	0.3	-	-	28	50	66	80	100	150	167	250	330	400
		70	0.5	-	-	16	28	40	50	60	90	100	150	200	240
		150	1	-	-	8	14	20	25	30	45	50	75	100	120
		250	3	-	-	3	5	7	9	13	15	16	25	35	40
		400	3.5	-	-	2	4	6	7	11	12	14	21	30	34
		1000	10	-	-	1	1	2	2	4	4	5	7	10	12
		2000	17	-	-	-	-	1	1	2	2	2	4	6	7
	Corrected	35	0.17	6	-	33	60	65	65	200	240	260	400	420	440
		70	0.28	12	-	20	36	40	40	120	145	155	240	255	265
		150	0.6	20	-	9	17	18	18	56	68	74	112	118	120
		250	1.5	32	-	5	7	8	10	26	28	28	46	50	53
		400	2	35	-	4	5	6	7	20	22	25	35	37	40
		1000	5.8	95	-	1	1	2	2	6	7	8	12	12	13
		2000	11.5	148	-	-	-	1	1	3	3	4	6	6	6
380...415V 50/60Hz	Not corrected	2000	10.3	-	-	-	-	1	1	2	2	3	4	6	7
		3500	18	-	-	-	-	-	-	1	1	1	2	3	4
	Corrected	2000	6.6	60	-	-	1	1	1	3	3	4	6	7	7
		3500	11.6	100	-	-	-	-	-	2	2	2	3	3	4

❶ For 220/240V circuits, either single-phase (between phase and neutral) or 2-wire (between phase and phase), the maximum number of lamps is as per the table.
For three-phase circuits with neutral 380/415V or 220/240V, the maximum number of lamps controlled by the same contactor is n • 3.
For three-phase 380/415V circuits without neutral, the maximum number of lamps controlled by the same contactor is n • $\sqrt{3}$.
Electrical life is 100,000 cycles up to 55°C.

POWER FACTOR CORRECTION CAPACITORS

CHOICE CRITERIA

The contactor during the closing transition is influenced by electrical currents having high frequencies and high amplitudes.The frequencies of these currents range between 1 and 10kHz; the amplitudes must have values lower than the maximum permissible current peak of the contactor to be used.

AMBIENT OPERATING CONDITIONS

Ambient temperature: ≤ 50 °C.
For temperatures higher than 50°C up to 70 °C, stated maximum operational power ratings are to be reduced by a percentage equal to the difference between the ambient temperature and 50°C.
Operating cycle: ≤ 120 cy/h
Electrical life: ≥ 100,000 cycles.

Contactor	IEC rated current ≤400V	Maximum permissible peak current	IEC maximum operational voltage	Fuse	IEC maximum operational power (AC-6b)			
					220V 230V 240V	380V 400V	415V 440V	500V 660/690V
Type	[A]	[A]	[V]	gG [A]	[kvar]	[kvar]	[kvar]	[kvar]
BF09A	12	500	690	16	4.5	7.5	9	10
BF12A	18	550	690	25	7	12.5	12	14
BF18A	23	1000	690	32	9	15	16	18
BF25A	23	1000	690	32	9	15	16	18
BF26A	30	1400	690	40	11	20	22	22
BF32A	36	1700	690	50	14	25	27	30
BF38A	43	1900	690	63	17	30	30	34
BF40A	50	2500	1000	100	20	35	40	45
BF50A	58	2500	1000	80	22	40	41	45
BF65A	65	2500	1000	100	26	45	50	52
BF80A	75	2500	1000	125	30	50	56	60
BF94A	75	2500	1000	125	30	50	56	70
BF95A	90	3000	1000	125	34	60	75	80
BF115A	115	3000	1000	160	45	75	85	135
BF150A	144	3000	1000	160	50	100	115	150
BF160	150	3400	1000	200	57	100	108	130
BF195	170	3600	1000	250	65	112	122	150
BF230	215	4500	1000	315	85	140	150	190
BF265	240	5100	1000	315	91	158	172	210
BF330	265	5900	1000	315	105	184	200	245
BF400	320	7500	1000	400	122	211	230	280
B500	500	9000	1000	630	190	330	360	430
B630	610	11000	1000	800	230	400	432	520


The use of contactors with the above operational powers is allowable only when the peak current, in the installation point of the power factor correction board, is lower than the values stated in the table.
If this condition is not verified, it is necessary to use limiting inductances or specific contactors stated on page 2-18. Consult Technical support (see contact details on inside front cover) to obtain detailed information on the correct use of contactors without limiting inductances.

LIMITING INDUCTANCES

The use of limiting inductances is imperative when the system inductances (line transformer and cables), upstream of the power factor correction panel, are not able to maintain the maximum connecting current within the limit value of the contactor used.

FAST DISCHARGE RESISTANCES OF CAPACITORS

The use of the contactor, according to the wiring diagram given, allows the fast discharge of the capacitors as well as the instantaneous disconnection of the capacitors from the mains when the coil is de-energised.
The resistances, indicated in the following table, guarantee the discharge within a maximum time of 2 seconds.

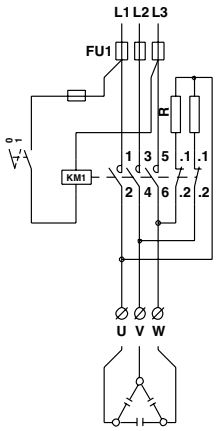

Capacitor power	Voltage 220...230V		Voltage 380...500V	
[kvar]	[Ω]	[W]	[Ω]	[W]
2.5...5	3900	12	8200	12
10...15	1800	25	4300	25
20...50	1000	50	2200	50

تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

SPECIAL CONTACTORS FOR POWER FACTOR CORRECTION CAPACITORS

GENERAL CHARACTERISTICS

These contactors are equipped with early-make contacts. This special type of contact has the purpose of connecting for a very brief interval, 2-3ms, during the contactor closing, resistors which limit the connecting current of the capacitors. These resistors are then excluded when the closing operation is complete and the current capacity is conveyed to the main contacts. With this type of circuit, it is possible to obtain minor wear of all the components of the system especially fuses and capacitors ensuring a longer life and better reliability.

The contactors are particularly suitable for use in automatic power factor correction panels since there is no need of limiting inductances and a source of heat has been eliminated. In this way, these modular electric switchboards can be more compact.

The BFK version, figure 1, is designed for three-phase switching. The peculiarity of this type is in the contacts, suitable to connect limiting resistors, which close only for the time needed to limit any in-rush current peak and then reopen to avoid eventual flow of residual currents through the resistors.

AMBIENT OPERATING CONDITIONS

Ambient temperature: ≤ 50 °C

For ambient temperature higher than 50°C up to 70°C, maximum operational power ratings, indicated in the table, are to be reduced by a percentage equal to the difference between the ambient temperature and 50°C.

Operating cycles: ≤ 120 cy/h.

Electrical life: ≥ 400,000 cycles.

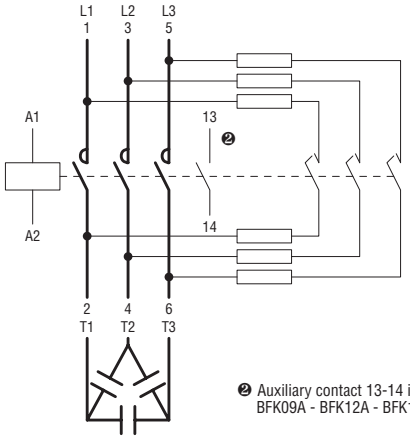


Fig. 1

❷ Auxiliary contact 13-14 is found on BFK09A - BFK12A - BFK18A types only.

Contactor	Built-in auxiliary contacts NO	IEC rated operational current ≤440V	IEC fuse gG	Maximum IEC power at ≤50°C (AC6b) ❶ 220V 230V 240V	380V 400V	415V 440V	500V 690V
Type	n°	[A]	[A]	[kvar]	[kvar]	[kvar]	[kvar]
BFK09A	1	12	16	4.5	7.5	9	10
BFK12A	1	18	25	7	12.5	14	16
BFK18A	1	23	40	9	15	17	20
BFK26A	—	30	40	11	20	22	25
BFK32A	—	36	63	14	25	27.5	30
BFK38A	—	43	63	17	30	33	36
BFK50A	—	58	80	22	40	41	46
BFK65A	—	65	100	26	45	50	56
BFK80A	—	75	125	30	50	56	65
BFK94A❷	—	90	125	34	60	75	80
BFK95A	—	90	125	34	60	75	80
BFK115A	—	115	160	45	75	85	135
BFK150A	—	144	160	50	100	115	150

NOTE: See page 2-18 for order codes.

❶ Consult Technical support (Tel. 035 4282422; E-mail: service@LovatoElectric.com) for the use of contactors to switch within delta connection.

❷ **Note: The maximum thermal current of the BFK94 contactor is 115A.**

CHOICE OF CONTACTORS TYPE BFK ACCORDING TO cULus LISTING

Contactor	Built-in auxiliary contacts NO (SPST)	UL/CSA rated current ≤440V	UL/CSA protection fuse SC/gG	Maximum UL/CSA operational power at voltage: 240V	480V	600V
Type	n°	[A]	[A]	[kvar]	[kvar]	[kvar]
BFK09A	1	12	16	4.5	9	10
BFK12A	1	18	25	7	14	16
BFK18A	1	23	40	9	17	20
BFK26A	—	30	40	11	22	27.5
BFK32A	—	36	63	14	27.5	32
BFK38A	—	43	63	17	33	36
BFK50A	—	58	80	22	41	46
BFK65A	—	70	100	26	50	56
BFK80A	—	75	125	30	60	75
BFK95A	—	100	125	40	80	100
BFK115A	—	115	160	45	90	120
BFK150A	—	121	160	50	100	125

NOTE: See page 2-18 for order codes.

IEC OPERATIONAL CHARACTERISTICS BG00 AND BF00

TYPE			BG00	BF00A	BF00D	BF00L
POLE CONTACT CHARACTERISTICS						
Poles❶		n°	4			
Conventional free air thermal current Ith (≤40°C)		A	10			
Rated insulation voltage Ui		V	690			
Frequency limit		Hz	25...400 ❷			
UL/CSA and IEC/EN/BS 60947-5-1 auxiliary contact designation		AC	A600			
		DC	Q600	P600		
Terminals		A	7.5	8.3		
		B	4	3.5		
		Screw	M3	M3.5		
		Phillips	2	2		
Quick-connect		Faston	1x6.35 - 2x2.8	—		
Tightening torque for contact terminals min-max		Nm	0.8...1	1.5...1.8		
		lb.in	9	13...16		
Tightening torque for coil terminals min-max		Nm	0.8...1			
		lb.in	7...9			
		Phillips	2			
Conductor section connectable with 1 or 2 wires min ... max	AWG stranded	n°	18...12	16...10		
	Flexible w/o lug	mm²	0.75...2.5	1...6		
	Flexible c/w boot-lace ferrule	mm²	2x1.5 o 1x2.5	1...4		
	Flexible c/w spade lug	mm²	2x1.5 o 1x2.5	1...4		
Terminal protection according to IEC/EN/BS 60529			IP20❸			
AMBIENT CONDITIONS						
Operating temperature		°C	-50...+70			
Storage temperature		°C	-60...+80			
Maximum altitude		m	3000			
Operation position	Normal		On vertical plane			
	Allowable		±30°			
Fixing			Screw or on 35mm DIN rail			

❶ The built-in auxiliary contacts are high-conductivity.
❷ Derating for use at 61-400 Hz. Consult Technical support for information (Tel. 035 4282422; E-mail: service@LovatoElectric.com).
❸ IP20 protection warranted by wired equipment; minimum 0.75mm² conductor section for BG00 or 1mm² for BF00.

ELECTRICAL RATINGS BASED ON IEC/EN/BS 60947-5-1 UTILIZATION CATEGORIES AND UL508/CSA C22.2 n°14

IEC/EN/BS designation	IEC/EN/BS utilization category	Conventional enclosed thermal current Ithe	Rated operational current Ie [A] at rated operational voltage Ue										VA rating	
UL designation	—	Thermal continuous test current	Maximum Amperes (AC) 60Hz										Maximum VA	
			120VAC		240VAC		380VAC		480VAC		600VAC			
Alternating current		[A]	Make	Break	Make	Break	Make	Break	Make	Break	Make	Break	Make	Break
A600	AC-15	10	60	6	30	3	19	1.9	15	1.5	12	1.2	7200	720
Direct current			Maximum Amperes (DC) Make or Break										W max	
			125VDC		250VDC		301VDC		400VDC		500VDC	600VDC	300V or less ❺	
P600	DC-13	5	1.1		0.55		0.2		0.31		0.27	0.2	138	138
Q600	DC-13	2.5	0.55		0.27		0.1		0.15		0.13	0.1	69	69

تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

TYPE					BG00	BF00A	BF00D	BF00L
AC CONTROL								
Rated control voltage at 50/60Hz or 60Hz				V	12...575	12...600	—	—
Operating voltage limits								
50/60Hz coil powered at	50Hz	pick-up		% Us	75...115	80...110	—	—
		drop-out		% Us	20...55	20...55	—	—
	60Hz	pick-up		% Us	80...115	80...110	—	—
		drop-out		% Us	20...55	20...55	—	—
60Hz coil powered at		pick-up		% Us	75...115	80...110	—	—
		drop-out		% Us	20...55	20...55	—	—
Average coil consumption at ≤20°C								
50/60Hz coil powered at	50Hz	in-rush		VA	30	75	—	—
		holding		VA	4	9	—	—
	60Hz	in-rush		VA	25	70	—	—
		holding		VA	3	6.5	—	—
60Hz coil powered at		in-rush		VA	30	75	—	—
		holding		VA	4	9	—	—
Dissipation at holding ≤20°C			a 50Hz	W	0.95	2.5	—	—
DC CONTROL								
Rated control voltage				V	6...250	-—	6...415	6...415
Operating voltage limits		pick-up		% Us	75...115	—	70...125	80...110
		drop-out		% Us	10...20	—	10...40	10...40
Average consumption at ≤20°C (in-rush/holding)				W	3.2❶	—	5.4	2.4
OPERATING TIMES								
Average time for Us control in	AC	closing NO		ms	12...21	8...24	—	—
		opening NO		ms	9...18	10...20	—	—
		closing NC		ms	17...26	17...30	—	—
		opening NC		ms	7...17	7...18	—	—
	DC	closing NO		ms	18...25	—	54...66	75...91
		opening NO		ms	2...3	—	14...17	15...19
		closing NC		ms	3...5	—	24...30❷	24...30❸
		opening NC		ms	11...17	—	47...57❷	67...81❸
LIFE								
Mechanical	AC control			cycles	20 million			
	DC control			cycles	20 million			
MAXIMUM OPERATING RATE								
Mechanical operations				cycles/h	3600			

❶ 2.3W for low-consumption BG00...L version.
❷ NC closing time for BF0004D is 23...29ms while NC opening time is 40...49ms.
❸ NC closing time for BF0004L is 25...31ms while NC opening time is 56...68ms.

IEC OPERATIONAL CHARACTERISTICS BG06..., BG09... AND BG12...

TYPE				BG06	BG09	BG12
POLE CHARACTERISTICS						
Power poles			N°	3	3-4	3
Rated insulation voltage Ui			V	690	690 ❶	690
Rated impulse withstand voltage Uimp			kV	6	6	6
Operational frequency			Hz	25...400 ❷	25...400 ❷	25...400 ❷
Operational current	Conventional free air thermal Ith (≤40°C)		A	16	20	20
	AC3 (≤440V ≤55°C)		A	6	9	12
	AC4 (400V) ❸		A	3.3	4.0	4.8
Short-time allowable current (IEC/EN/BS 60947-1)		10s	A	96	96	96
Maximum fuse size coordination Type 2 - 400V - 50kA		gG	A	16	20	20
		aM	A	6	10	16
Making capacity (RMS value)			A	92	92	120
Breaking capacity at voltage		≤ 440V	A	72	72	96
		500V	A	72	72	72
		690V	A	72	72	72
Consumption per pole and resistance (average values)			mΩ	10	10	10
		Ith	W	2.6	4	4
		AC3	W	0.36	0.81	1.44
Terminals			A	7.5	7.5	7.5
			B	4	4	4
			screw	M3	M3	M3
			Phillips	2	2	2
		Quick-connect	Faston	—	1x6.35 - 2x2.8	—
		Solder		—	PIN for PCB❹	—
Tightening torque for pole and coil terminals min-max			Nm	0.8...1	0.8...1	0.8...1
			lb.in	9	9	9
			Phillips	2	2	2
Conductor section connectable with 1 or 2 wires min...max						
	AWG stranded		N°	18...12		
	Flexible w/o lug		mm²	0.75...2.5		
	Flexible c/w boot-lace ferrule		mm²	2x1.5 or 1x2.5		
	Flexible c/w spade lug		mm²	2x1.5 or 1x2.5		
Terminal protection to IEC/EN/BS 60529				IP20❺		
AUXILIARY CONTACT CHARACTERISTICS						
Type of contact			n°	1-NO or NC based on configuration❻		
Thermal current Ith			A	10		
IEC/EN/BS 60947-5-1 designation			AC	A600		
			DC	Q600		
AMBIENT CONDITIONS						
Operating temperature			°C	-50...+70		
Storage temperature			°C	-60...+80		
Maximum altitude			m	3000		
Operating position		Normal		On vertical plane		
		Allowable		± 30°		
Fixing				Screw or on 35mm DIN rail		

❶ Rated voltage Ui for BGP... types is 500V.
❷ Derating for use at 61-400Hz. Consult Technical support for information (Tel. 035 4282422; E-mail: service@LovatoElectric.com).
❸ Current values guarantee an electrical life of about 50,000 cycles.
❹ Dimensions and drilling distances are given on page 2-38.
❺ IP20 protection warranted by wired equipment; minimum 0.75mm² conductor section.
❻ NO or NC auxiliary is highly conductive.
Other characteristics are the same as the mechanical characteristics of the poles.

تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

TYPE				BG06	BG09	BG12
AC CONTROL						
Rated voltage at 50/60Hz, 60Hz			V	12...575		
Operating voltage limits						
50/60Hz coil powered at	50Hz	pick-up	% Us	75...115		
		drop-out	% Us	20...55		
	60Hz	pick-up	% Us	80...115		
		drop-out	% Us	20...55		
60Hz coil powered at 60Hz		pick-up	% Us	75...115		
		drop-out	% Us	20...55		
Average coil consumption at ≤20°C						
50/60Hz coil powered at	50Hz	in-rush	VA	30		
		holding	VA	4		
	60Hz	in-rush	VA	25		
		holding	VA	3		
60Hz coil powered at 60Hz		in-rush	VA	30		
		holding	VA	4		
Dissipation at ≤20°C		at 50Hz	W	0.95		
DC CONTROL						
Rated control voltage			V	6...250		
Operating voltage limits	pick-up		% Us	75...115		
	drop-out		% Us	10...25		
Average consumption at ≤20°C (in rush-holding)			W	3.2	3.2❶	3.2
OPERATING TIMES						
Average time for Us control in	AC	closing NO	ms	12...21	12...21	12...21
		opening NO	ms	9...18	9...18	9...18
		closing NC	ms	17...26	17...26	17...26
		opening NC	ms	7...17	7...17	7...17
	DC	closing NO	ms	18...25	18...25	18...25
		opening NO	ms	2...3	2...3	2...3
		closing NC	ms	3...5	3...5	3...5
		opening NC	ms	11...17	11...17	11...17
LIFE						
Mechanical	AC control		cycles	20 million		
	DC control		cycles	20 million		
Electrical (Ie at 400V AC3)			cycles	500.000		
MAXIMUM OPERATING RATE						
Mechanical operations			cy/h	3600		

❶ 2.3W for low-consumption type BG09...L.

ELECTRICAL RATINGS BASED ON IEC/EN/BS 60947-5-1 UTILIZATION CATEGORIES AND UL508/CSA C22.2 n°14

IEC/EN/BS designation	IEC/EN/BS utilization category	Conventional enclosed thermal current Ithe	Rated operational current Ie [A] at rated operational voltage Ue										VA rating	
UL designation	—	Thermal continuous test current	Maximum Amperes (AC) 60Hz										Maximum VA	
			120VAC		240VAC		380VAC		480VAC		600VAC			
Alternating current		[A]	Make	Break	Make	Break	Make	Break	Make	Break	Make	Break	Make	Break
A600	AC-15	10	60	6	30	3	19	1.9	15	1.5	12	1.2	7200	720
Direct current			Maximum Amperes (DC) Make or Break										W max	
			125VDC		250VDC		301VDC		400VDC		500VDC		300V or less	
Q600	DC-13	2.5	0.55		0.27		0.1		0.15		0.13		69	69

IEC OPERATIONAL CHARACTERISTICS BF09-BF38

TYPE				BF09	BF12	BF18	BF25	BF26	BF32	BF38
POLE CHARACTERISTICS										
Power poles			n°	3-4	3-4	3-4	3	3-4	3	3-4
Rated insulation voltage Ui			V	690						
Rated impulse withstand voltage Uimp			kV	6						
Operational frequency			Hz	25...400❶						
Operational current	Conventional free air thermal Ith (≤40°C)		A	25	28	32	32	45	56	56(60❺)
	AC3 (≤440V ≤55°C)		A	9	12	18	25	26	32	38
	AC4 (400V)❷		A	4.9	7.9	8.5	10	11.5	13.5	15.5
Short-time allowable current for 10s (IEC/EN/BS 60947-1)			A	150	150	200	200	210	320	320
Max fuse size coordination Type 2 - 400V - 50kA		gG	A	25	32	32	50	50	63	63
		aM	A	10	12	20	25	32	32	40
Making capacity (RMS value)			A	90	120	180	250	260	320	380
Breaking capacity at voltage		≤440V	A	72	96	144	200	208	256	304
		500V	A	72	96	120	184	184	240	240
		690V	A	71	94	94	102	168	192	192
Consumption and resistance per pole (average values)			mΩ	2.5	2.5	2.5	2.5	2.0	2.0	2.0
		Ith	W	1.6	2.0	2.6	2.6	4.0	6.0	6.0
		AC3	W	0.2	0.4	0.8	1.6	1.4	2.0	2.9
Terminals			Type	Clamp-screw						
			A	9.5	9.5	9.5	9.5	13	13	13
			B	4.5	4.5	4.5	4.5	5.5	5.5	5.5
			Screw	M3.5	M3.5	M3.5	M3.5	M4	M4	M4
			Phillips	2	2	2	2	2	2	2
Tightening torque for pole terminal min-max			Nm	1.5...1.8	1.5...1.8	1.5...1.8	1.5...1.8	2.5...3	2.5...3	2.5...3
			lb.in	13...16	13...16	13...16	13...16	22...27	22...27	22...27
Tightening torque for coil terminals min-max			Nm	0.8...1	0.8...1	0.8...1	0.8...1	0.8...1	0.8...1	0.8...1
			lb.in	7.1...8.8	7.1...8.8	7.1...8.8	7.1...8.8	7.1...8.8	7.1...8.8	7.1...8.8
			Phillips	2	2	2	2	2	2	2
Conductor section connectable with 1 or 2 wires min...max										
	AWG stranded		n°	16...8	16...8	16...8	16...8	14...6	14...6	14...6
	Flexible w/o lug		mm²	1...6	1...6	1...6	1...6	2.5...16	2.5...16	2.5...16
	Flexible c/w insulated boot-lace ferrule		mm²	1...4	1...4	1...4	1...4	1...10	1...10	1...10
	Flexible c/w insulated spade lug		mm²	1...4	1...4	1...4	1...4	1...10	1...10	1...10
Power terminal protection according to IEC/EN/BS 60529				IP20❸	IP20❸	IP20❸	IP20❸	IP20❹	IP20❹	IP20❹
AUXILIARY CONTACT CHARACTERISTICS										
Type of contact			n°	1-NO or NC based on configuration❻				—		
Thermal current Ith			A	10				—		
IEC/EN/BS 60947-5-1 designation			AC	A600				—		
			DC	P600				—		
AMBIENT CONDITIONS										
Operating temperature			°C	-50...+70						
Storage temperature			°C	-60...+80						
Maximum altitude			m	3000						
Operating position	Normal			On vertical plane						
	Allowable			± 30°						
Fixing				Screw or on 35mm DIN rail						

Products certified by UL / CSA as Elevator Equipment.

Type	Maximum horsepower ratings Single phase		Three phase			
	120V	240V	200-208V	240V	480V	600V
	[HP]	[HP]	[HP]	[HP]	[HP]	[HP]
BF12❼	½	1½	3	3	7½	7½
BF25❼	1½	3	5	7½	15	15
BF38❼	3	5	10	10	20	20
BF65❽	3	10	15	15	40	50
BF95❽	7.5	15	25	30	60	75
BF115❽	–	–	30	40	75	100
BF150❽	–	–	30	40	75	100

❶ Derating for use at 61-400Hz. Consult Technical support for information; see contact details on inside front cover.
❷ Current values guarantee an electrical life of about 200,000 cycles.
❸ IP20 protection warranted by wired equipment; minimum 1mm² conductor section.
❹ IP20 protection on front.
❺ For this other current value, use 16mm² wire with spade cable terminal.
❻ NO or NC auxiliary is highly conductive. Other characteristics are the same as the mechanical characteristics of the poles.
❼ Elevator equipment by CSA (file LR54332-23) 500,000 operations.
❽ Elevator equipment by cULus (file E93602) 500,000 operations.

تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com


TYPE					BF09	BF12	BF18	BF25	BF26	BF32	BF38
AC CONTROL											
Rated voltage at 50/60Hz, 60Hz				V	12...600						
Operating voltage limits											
50/60Hz coil powered at	50Hz	pick-up		% Us	80...110						
		drop-out		% Us	20...55						
	60Hz	pick-up		% Us	85...110						
		drop-out		% Us	20...55						
60Hz coil powered at 60Hz		pick-up		% Us	80...110						
		drop-out		% Us	20...55						
Average coil consumption at ≤20°C											
50/60Hz coil powered at	50Hz	in-rush		VA	75						
		holding		VA	9						
	60Hz	in-rush		VA	70						
		holding		VA	6.5						
60Hz coil powered at 60Hz		in-rush		VA	75						
		holding		VA	9						
Dissipation at holding ≤20°C	50Hz			W	2.5						
DC CONTROL - normal and low consumption											
Rated control voltage				V	6...415						
Operating limits											
pick-up	three-pole BF...D		from	% Us	70						
			to	% Us	125						
	four-pole BF...D		from	%Us	70				80		
			to	%Us	125				125		
	three and four-pole BF...L		from	% Us	80						
			to	% Us	110						
drop-out	for all versions		from	%Us	10						
			to	%Us	40						
Average coil consumption ≤20°C (in rush-holding)	BF...D			W	5.4						
	BF...L			W	2.4						
OPERATING TIMES											
Average time for Us control in	AC	closing NO		ms	8...24				8...24		
		opening NO		ms	10...20				5...15		
		closing NC		ms	14...28❶				9...20❷		
		opening NC		ms	7...18❶				9...17❷		
	DC BF...D types	closing NO		ms	54...66				53...65		
		opening NO		m	14...17				14...18		
		closing NC		ms	24...30❸				23...28		
		opening NC		ms	47...57❸				46...56		
	DC BF...L types	closing NO		ms	75...91				76...92		
		opening NO		ms	15...19				16...20		
		closing NC		ms	24...30❹				25...31		
		opening NC		ms	67...81❹				63...77		
LIFE											
Mechanical (million)	AC control			cycles	20	20	20	20	20	20	20
	DC control			cycles	20	20	20	20	20	20	20
Electrical (Ie at 400V AC3) (million)				cycles	2.0	2.0	1.6	1.2	1.6	1.6	1.4
MAXIMUM OPERATING RATE											
Mechanical operations				cy/h	3600						

❶ NC closing time for BF...T0A types is 9...25ms while NC opening time is 9...15ms.
❷ NC closing time for BF...T0A types is 11...29ms while NC opening time is 6...14ms.
❸ NC closing time for BF...T0D types is 23...29ms while NC opening time is 40...49ms.
❹ NC closing time for BF...T0L types is 25...31ms while NC opening time is 56...68ms.

ELECTRICAL RATINGS BASED ON IEC/EN/BS 60947-5-1 UTILIZATION CATEGORIES AND UL508/CSA C22.2 n°14

IEC/EN/BS designation	IEC/EN/BS utilization category	Conventional enclosed thermal current Ithe	Rated operational current Ie [A] at rated operational voltage Ue										VA rating	
UL designation	—	Thermal continuous test current	Maximum Amperes (AC) 60Hz										Maximum VA	
			120VAC		240VAC		380VAC		480VAC		600VAC			
Alternating current		[A]	Make	Break	Make	Break	Make	Break	Make	Break	Make	Break	Make	Break
A600	AC-15	10	60	6	30	3	19	1.9	15	1.5	12	1.2	7200	720
Direct current			Maximum Amperes (DC) Make or Break										W max	
			125VDC		250VDC		301VDC		400VDC		500VDC		300V or less	
P600	DC-13	5	1,1		0,55		0,2		0,31		0,27		138	138

IEC OPERATIONAL CHARACTERISTICS BF40...BF150...

TYPE				BF40	BF50	BF65	BF80	BF94	BF95	BF115	BF150
POLE CHARACTERISTICS											
Power poles			N°	3-4	3-4	3-4	3-4	3	3-4	3-4	3-4
Rated insulation voltage Ui			V	1000							
Rated impulse withstand voltage Uimp			kV	8							
Operational frequency			Hz	25 ... 400❶							
Operational current	Conventional free air thermal Ith (≤40°C)		A	70	90	100	115	115	140	160	165
	AC3 (≤440V ≤55°c)		A	40	50	65	80	95	95	115	150
	AC4 (400V)❷		A	24	28	31	38	45	45	54	70
Short-time allowable current for (IEC/EN/BS 60947-1)		10s	A	400	400	640	640	640	760	920	1200
Maximum fuse size coordination Type 2 - 400V - 50kA		gG	A	100	100	125	125	125	160	200	250
		aM	A	50	50	80	80	100	100	125	160
Making capacity (RMS value)			A	400	500	650	800	950	1200	1500	1500
Breaking capacity at voltage		≤440V	A	320	400	520	640	760	1100	1200	1200
		500V	A	265	352	425	625	660	775	850	1025
		690V	A	256	312	376	456	475	745	905	905
Consumption and resistance per pole (average values)			mΩ	0.8	0.8	0.8	0.6	0.6	0.45	0.45	0.45
		Ith	W	3.9	6.5	8.0	7.9	7.9	8.8	11.5	12
		AC3	W	1.3	2.0	3.4	3.8	5.4	4.1	6.0	10.1
Terminals			Type	Double lug clamp terminal 							
			A [mm]	9.5					15		
			B [mm]	11					14.5		
			Screw	M6					M8		
			Metric Allen	4					4		
Tightening torque for power pole terminal min-max			Nm	4...5					6...7		
			lb.in	35.4...44.3					53.1...61.9		
Tightening torque for coil terminals min-max			Nm	0.8...1							
			lb.in	7.1...8.8							
			Phillips	2							
Conductor section connectable with 1 or 2 wires min...max		AWG	N°	14...2					14...2/0		
		Flexible w/o lug	mm^2	1.5...35					1.5...70		
		Flexible c/w lug	mm^2	1.5...35					1.5...70		
Power terminal protection according to IEC/EN/BS 60529				IP20 front							
AMBIENT CONDITIONS											
Operating temperature			°C	-40...+70❸							
Storage temperature			°C	-60...+80❹							
Maximum altitude			m	3000							
Operating position		Normal		On vertical plane							
		Allowable		± 30°							
Fixing				Screw or on 35mm DIN rail					Screw or on 35mm DIN rail❺		

❶ Derating for use at 61-400 Hz. Consult Technical support for information; see contact details on inside front cover.
❷ Current values guarantee an electrical life of about 200,000 cycles.
❸ -40...+70 for BF40...150E.
❹ -50...+80 for BF40...150E.
❺ Din rail height 15mm (TH35-15).

Products certified by UL / CSA as Elevator Equipment.
See table on page 2-72.


تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

TYPE				BF40	BF50	BF65	BF80	BF94	BF95	BF115	BF150
AC CONTROL											
Rated voltage at 50/60Hz, 60Hz			V	12...600 (20...250 electronically controlled AC/DC coil)							
Operating voltage limits											
50/60Hz coil powered at	50Hz	pick-up	% Us	80...110 ❶							
		drop-out	% Us	20...55 (≤70% electronically controlled AC/DC coil)							
	60Hz	pick-up	% Us	85...110 ❶							
		drop-out	% Us	40...55 (≤70% electronically controlled AC/DC coil)							
60Hz coil powered at 60Hz		pick-up	% Us	80...110							
		drop-out	% Us	20...55							
Average coil consumption at ≤20°C											
50/60Hz coil powered at	50Hz	in-rush	VA	210 (35...120 electronically controlled AC/DC coil)					300 (70...175 electronically controlled AC/DC coil)		
		holding	VA	15 (1.5...3.7 electronically controlled AC/DC coil)					20 (1.7...3.5 electronically controlled AC/DC coil)		
	60Hz	in-rush	VA	195 (35...120 electronically controlled AC/DC coil)					275 (70...175 electronically controlled AC/DC coil)		
		holding	VA	13 (1.5...3.7 electronically controlled AC/DC coil)					17 (1.7...3.5 electronically controlled AC/DC coil)		
60Hz coil powered at 60Hz		in-rush	VA	210					300		
		holding	VA	15					20		
Dissipation at ≤20°C		50Hz	W	5 (1...2.5 electronically controlled AC/DC coil)					6.5 (1.5...3 electronically controlled AC/DC coil)		
DC CONTROL											
Rated voltage			V	20...250							
Operating voltage limits		pick-up	% Us	80...110 ❶							
		drop-up	% Us	≤75% Us min							
Average consumption ≤20°C (in rush-holding)			W	23...68 / 1.2...1.9					70...80 / 1.3...1.5		
OPERATING TIMES											
Average time for Us control in	AC	closing NO	ms	12...28 (40...85 electronically controlled AC/DC coil)					16...32 (45...90 electronically controlled AC/DC coil)		
		opening NO	ms	8...22 (20...55 electronically controlled AC/DC coil)					9...24 (24...60 electronically controlled AC/DC coil)		
	DC	closing NO	ms	40...85 (electronically controlled AC/DC coil)					45...90 (electronically controlled AC/DC coil)		
		opening NO	ms	20...55 (electronically controlled AC/DC coil)					24...60 (electronically controlled AC/DC coil)		
LIFE											
Mechanical (million)	AC control		cycles	15	15	15	15	15	15	15	15
	DC control		cycles	15	15	15	15	15	15	15	15
Electrical (Ie at 400V in AC3) (million)			cycles	1.5	1.4	1.4	1.3	1.1	1.4	1.2	0.8
MAXIMUM OPERATING RATE											
Mechanical operations			cy/h	3600 (1500 for BF40...E...BF150...E...)							

❶ For electronically controlled AC/DC coils 80% of Us min. and 110% of Us max; for 20...48V 85% of Us min when powered in AC; 77% of Us min for 100...250V coils.
❷ Electromagnetic compatibility: BF40...94E contactors with electronic coil 20...48VAC/DC are in compliance with IEC/EN/BS 60947-1 and IEC/EN/BS 60947-1 standards for Environment B (domestic). The other devices are in compliance for Environment A (industrial) and can be upgraded to Environment B connecting proper filters; consult Technical support for information - see contact details on inside front cover.

IEC OPERATIONAL CHARACTERISTICS BF160...BF400 and B500...B1600

TYPE				BF160	BF195	BF230	BF265	BF330	BF400	B500	B630	B630 1000	B1250	B1600
POLE CHARACTERISTICS														
Power poles			N°	3-4	3-4	3-4	3-4	3-4	3-4	3-4	3-4	3-4	3-4	3-4
Rated insulation voltage Ui			V	1000										
Rated impulse withstand voltage Uimp			kV	8										
Operational frequency			Hz	25-400❶										
Operational current	Conventional free air thermal Ith (≤40°C)		A	250	275	350	450	500	600	700	800	1000	1250	1600
	AC3 (≤440V ≤55°C)		A	160	195	230	265	330	400	520	630	–	–	–
	AC4 (400V)❷		A	75	95	110	125	160	190	240	260	–	–	–
Short-time allowable current for 10s (IEC/EN/BS 60947-1)			A	1280	1560	1840	2120	2640	3200	4050	5040	5600	6500	8300
Maximum fuse size coordination Type 2 - 400V - 50kA		gG	A	315	400	400	630	630	800	800	1000	1000	1250	1600
		aM	A	250	250	315	400	500	500	500	630	–	–	–
Making capacity (RMS value)			A	1600	1950	2300	2650	3300	4000	5000	6300	6300	6300	6300
Breaking capacity at voltage		≤440V	A	1280	1560	1840	2120	2640	3200	5000	6300	6300	6300	6300
		500V	A	1248	1472	1472	1792	2240	2752	4500	5600	5600	5600	5600
		690V	A	1072	1296	1296	1624	2000	2504	4000	5000	5000	5000	5000
		1000V	A	440	528	624	856	960	1064	2700	3400	3400	3400	3400
Consumption and resistance per pole (average values)			mΩ	0.18	0.18	0.18	0.12	0.12	0.12	0.14	0.14	0.14	0.07	0.07
		Ith	W	11	13	21	24.3	30.0	43.2	68.6	90	140	110	180
		AC3	W	4.5	6.7	9.3	8.4	13	19	35	56	–	–	–
Terminals														
			A mm	18	18	18	20	20	20	35	40	60	80	80
			B mm	5	5	5	5	5	5	6	6	6	10	10
			Screw + hex nut	M8	M8	M8	M10	M10	M10	M10	M12	2xM12	2xM12	2xM12
			Key mm	13	13	13	17	17	17	17	19	19	19	19
	Coil terminals		Type	Screw						Faston 1x6.35 o 2x2.8				
Pole tightening torque			Nm	18	18	18	35	35	35	35	55	55	55	55
			lb.in	159	159	159	310	310	310	310	486	486	486	486
Tightening torque for coil terminals min-max			Nm	0.8...1						0.8...1❸				
			lb.in	7.1...8.8						7.1...8.8❸				
			Phillips	2						2❸				
Maximum conductor section														
	1 or 2 bars		mm	25x5	25x5	25x5	30x4	30x5	30x5	50x5	60x5	60x5	100x5	100x5
	N° 1 wire with lug		mm²	185			240			--	--	–	–	–
	N° 2 wire with lug		mm²	185			240			240	240	–	–	–
AMBIENT CONDITIONS														
Operating temperature			°C	-40...+70						-50...+70		-20...+60		
Storage temperature			°C	-50...+80						-60...+80		-30...+80		
Maximum altitude			m	3000										
Operating position	Normal			Vertical										
	Allowable			± 30°										
Fixing				Screw										

❶ Derating for use at 61-400 Hz. Consult Technical support for information (Tel. 035 4282422; E-mail: service@LovatoElectric.com).
❷ Current values guarantee an electrical life of about 200,000 cycles.
❸ G371: Adapter to transform coil Faston terminals into screw type.

تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

TYPE			BF160	BF195	BF230	BF265	BF330	BF400	B500	B630	B630 1000	B1250	B1600
AC CONTROL													
Supply voltage			50/60Hz, DC						Either in AC/DC			Only AC	
Rated control voltage		V	20...500						48...480	48...480	48...480	110/240	110/240
Operating voltage limits	pick-up	% Us	80...110❶						80...110	80...110	80...110	80...110	80...110
	drop-out	% Us	≤70% Us min						20...60	20...60	20...60	20...60	20...60
Consumption at ≤20°C	in-rush	VA/W	160...230			160...320			400	400	400	800	800
	holding	VA/W	1.5...3.0			3.5...8.0			18	18	18	45	45
Dissipation at ≤20°C		W	1.5...3.0			3.5...8.0			18	18	18	40	40
OPERATING TIMES													
Making		ms	50...100			80...120	80...120	80...120	110...180	110...180	110...180	120...210	300...450
Breaking		ms	30...75			30...75	30...75	30...75	60...100	60...100	60...110	70...130	70...130
LIFE													
Mechanical (million)	AC/DC	cycles	10	10	10	5	5	5	5	5	5	5	5
Electrical (million) (Ie at 400V in AC3)		cycles	1	1	1	0.9	0.7	0.6	0.7	0.7	–	–	–
MAXIMUM OPERATING RATE													
Mechanical operations		cy/h	1,000						1,200				
PARTICULAR CHARACTERISTICS													
Indicator			For contactor open or closed status										

❶ 80% of Us min and 110% of Us max.

CONTROL CIRCUIT UTILISATION
The input electronic circuit of the contactor coil B500-B1600 is designed and tested according to IEEEC 62.41 and can withstand a 10 kV impulse voltage (1.2/50µs) with 50 Joule energy.
For higher values, the use of an auxiliary step-down voltage transformer is recommended.

CONTACTORS WITH MECHANICAL LATCH
Contactors B500-B630 type, can have mechanical latch included or can be predisposed, to be completed with mechanical latch, see pages 2-6 and 2-8 (3-pole version) or 2-10 and 2-12 (4-pole version).
Technical data of mechanical latch G495 type is stated on page 2-32.

MECHANICAL INTERLOCK BETWEEN CONTACTORS ONE ON TOP OF THE OTHER B500...B1600... (Fig. 1, 2 and 3)
It is G356... type, which is provided in three types to allow different fixing interaxis of contactors.
Contactors of the same size can be interlocked as well as different sizes.

INTERAXIS A [mm] - For contactors with terminal protection (Fig. 1)

KM1	B500-B630
KM2	B500 B630
G3566	470...500

The tables below indicate the interaxis which can be obtained with the various interlock types; with terminal protections (INTERAXIS A) and without terminal protection (INTERAXIS B).

INTERAXIS B [mm] - For contactors without terminal protection (Fig. 2)

KM1	B500-B630
KM2	B500 B630
G3564	345...385
G3565	390...425
G3566	470...500

To interlock two contactors B6301000, use type G3566 only.
To interlock two contactors B1250 or B1600, it is imperative to use two pieces of type G3566 (fig. 3), one fixed on the left side and the other on the right.

Interaxis B is 470-500mm for B6301000, B1250 or B1600.
The B1250 or B1600 cannot be interlocked with the other types of the B series.

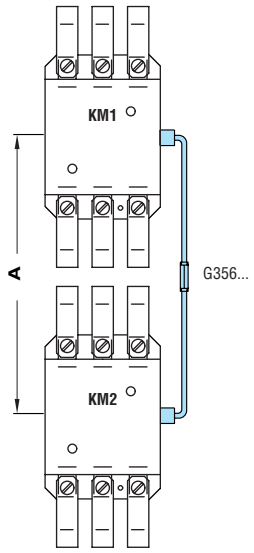


Fig. 1

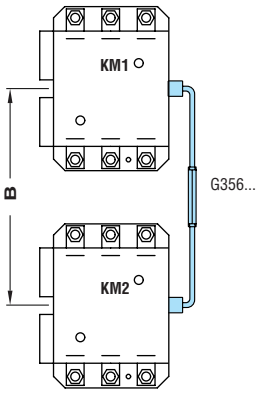


Fig. 2

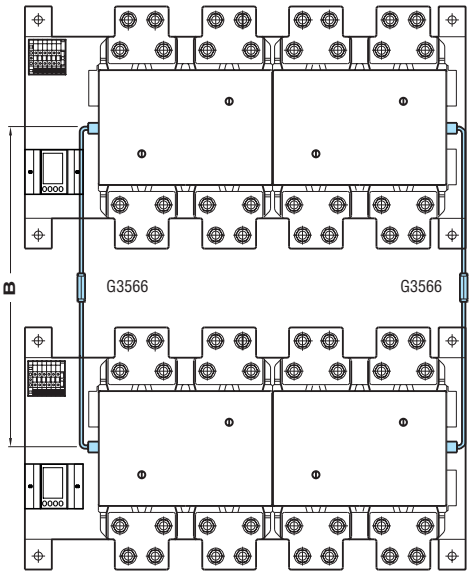


Fig. 3


تسلاکالا
021-9102 6126 | teslakala.com

تسلاکالا
021-9102 6126 | teslakala.com

Horizontal and vertical interlock between contactors B500...B630.
For contactor B6301000 (three-pole), contact our Technical support office.


Admissible mounting positions for 11G350 and 11G354 auxiliary contacts on contactors equipped with mechanical interlock:

– horizontal G355



B500-B630


– vertical G356/...

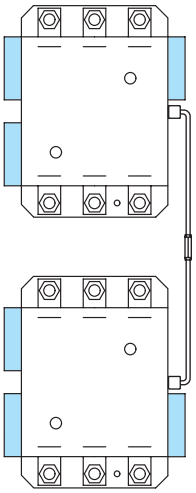

B500-B6301000


Admissible mounting positions for 11G358 adapter on contactors equipped with mechanical interlock:

– horizontal G355



B500-B630

– vertical G356/...

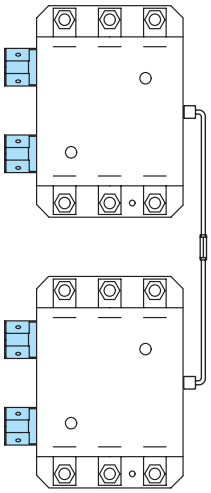

B500-B6301000